

AFT



2026

WATER PUMP CATALOGUE

The Name You Can Trust



The Name You Can Trust

APT International

About:

With Decades of experience, APT International is a global emerging brand that is determined to lead, with solid experience in Product development, manufacturing, distributing, selling, and servicing world class products. We aspire to become a global brand that is trusted by our customers for our tools, accessories, and equipment.

Believing that to build a great tool you need great materials is the driver of our manufacturing process, and for that we source the absolute best raw materials and components to build the most powerful and efficient tool for our customers to rely on.

We put our customers at the heart of everything we do, and we make sure that our wide range of products is available for them in every market we enter through a strong network of central distribution centers, local distributors, and retailers. Complemented with a vast network of service centers equipped with highly qualified technicians delivering a world class customer service quality to ensure our customers complete satisfaction.

Our Values:

Reliability: Our tools are built to last, for our customers to trust that they will consistently deliver the same quality every time.

Quality: We have a passionate commitment to providing high quality tools that exceed our customers' expectations.

Value for Money: Our advanced production capabilities enable us to offer our customers an unmatched combination of reliability, quality & price.

Innovation: We continuously strive to bring innovative solutions, for our customers to have the tools they need to get the job done.

Customer Focus: Our customers are at the heart of everything we do, we listen to their needs and work to deliver what they desire.

Contents

Jet Pump	1
Jet Pump	1-8
Peripheral Pump	9
Peripheral Pump	9-10
Centrifugal Pump	11
Centrifugal Pump	11-28
Self-priming Pump	29
Self-priming Pump	29-30
Circulation pump	31
Circulation pump	31-38
Standard Centrifugal Pump	39
Standard Centrifugal Pump	39-48
Commercial Centrifugal Pump	49
Commercial Centrifugal Pump	49-50
Deep well Pump	51
Deep well Pump	51-54
Submersible Pump	55
Submersible Pump	55-66
Drainage Pump	67
Drainage Pump	67-70
Swimming Pool Pump	71
Swimming Pool Pump	71-72
Control	73
Control	73-74

NSFM

Jet Pump

Capacity up to 70L/min(4.2m³/h)

Head up to 60m

Liquid Type: Clean water

Typology: Surface

Family: Self-priming

Application Limits

Manometric suction lift up to 9 m

Liquid temperature up to +40°C

Ambient temperature up to +40°C



Installation & Use

They are recommended for pumping clean water without abrasive particles, and liquids that are chemically non aggressive for the materials of which the pump is made. Widely used in well water lifting, garden irrigation, vegetable greenhouse water supply, breeding industry water supply and drainage, pipeline boosting, etc.

Construction

Pump Body: Cast iron.

Impeller: Stainless steel.

Motor Shaft: stainless steel


Mechanical Seal: Ceramic -graphite.

Electric Motor: Single-phase 220-240V/50Hz with condenser and thermal overload protector built into the copper winding.

Insulation: Class F.


Protection: IP 44.

Performance

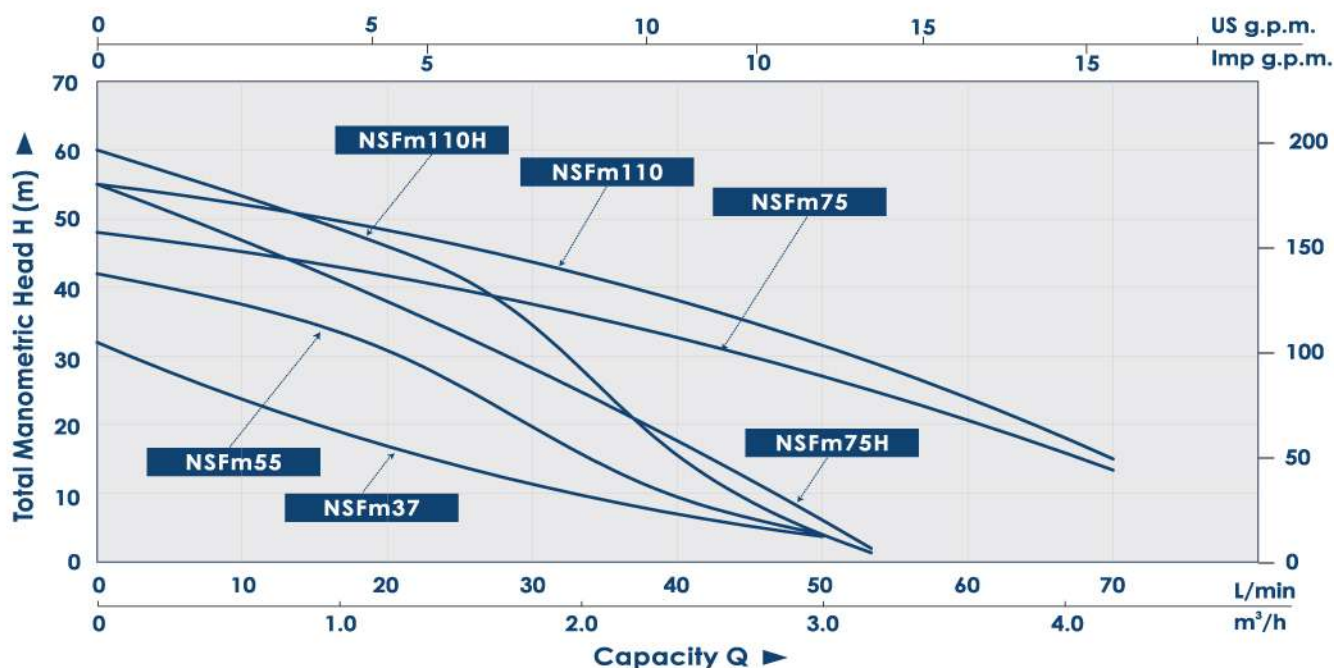


Model	Power		Current	Size	Q(m³/h)	0	0.3	0.9	1.2	1.5	2.4	3.0	3.6	4.2
	KW	HP	A	Inch	Q(L/min)	0	5	15	20	25	40	50	60	70
NSFm37	0.37	0.5	2.7	1"×1"	H(m)	32	25.7	19.3	16.9	14.4	7	-	-	-
NSFm55	0.55	0.75	3.9	1"×1"		42	35.6	32	30.8	28.1	9.5	-	-	-
NSFm75	0.75	1	5.1	1"×1"		48	43	40.7	39.5	37	32	26	23	13.4
NSFm110	1.1	1.5	7	1"×1"		55	49.4	41.8	39	36.5	32.2	30.8	24.3	15
NSFm75H	0.75	1	5.1	1"×1"		55	51.5	43.2	40.4	37.7	15.9	-	-	-
NSFm110H	1.1	1.5	7	1"×1"		60	55.3	49	46	42.6	14.8	4	-	-

Diagram

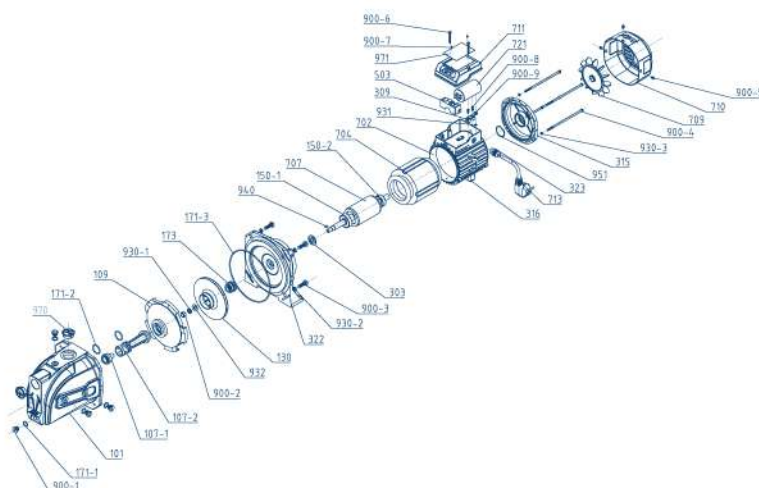


- | | |
|-------------------------------------|--|
| 101 Pump body | 710 Fan cover |
| 107-1 Injector | 711 Terminal box cover |
| 107-2 Nozzle | 713 Cable |
| 109 Guide vane | 721 Run capacitor |
| 130 Impeller | 900-1 Slotted hexagon bolt |
| 150-1 Bearing | 900-2 Slotted hexagon nut |
| 150-2 Bearing | 900-3 Hexagon headed bolt |
| 171-1 O ring | 900-4 Hexagon headed bolt |
| 171-2 O ring | 900-5 Phillips pan head screw |
| 171-3 O ring | 900-6 Phillips pan head screw |
| 173 Mechanical seal | 900-7 Nameplate rivet |
| 303 Water retaining ring | 900-8 Phillips pan head screw |
| 309 Cable pressing plate | 900-9 Cross recessed pan head screw with washer |
| 315 End cover | 930-1 Spring washer |
| 316 Foot | 930-2 Spring washer |
| 322 Coupling | 930-3 Spring washer |
| 323 Cable gland | 931 External tooth lock washer |
| 503 Terminal Block | 932 Flat washer |
| 702 Barrel | 940 Key |
| 703 Stator core with winding | 951 Wave washer |
| 707 Cast aluminum rotor | 970 Dust cover |
| 709 Fan | 971 Nameplate |

Product Parameters

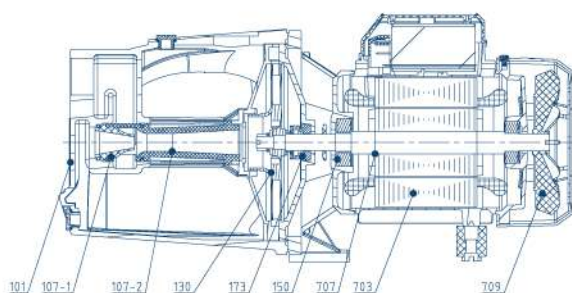

POS.	COMPONENT	CONSTRUCTION CHARACTERISTICS
101	PUMP BODY	Cast iron
107-1	INJECTOR	
107-2	NOZZLE	Plastic PPO
130	IMPELLER	Stainless steel
150	BEARING	6202-2RZ
173	MECHANICAL SEAL	Ceramic - graphite
703	STATOR CORE	Stator core with winding
707	ROTOR	Stainless steel shaft
709	FAN	Plastic PA

Product Dimensions

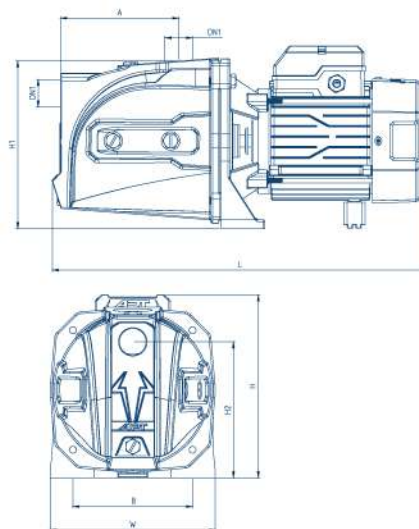

Model	DN1	DN2	Dimension(mm)						
			L	W	H	H1	H2	A	B
NSFm37	1"	1"	365	159.5	182.5	164	129.5	102.5	124
NSFm55	1"	1"	428	188	208	189	155	134	138
NSFm75	1"	1"	428	188	208	189	155	134	138
NSFm110	1"	1"	428	188	208	189	155	134	138
NSFm75H	1"	1"	428	188	208	189	155	134	138
NSFm110H	1"	1"	428	188	208	189	155	134	138

NSFM

Jet Pump

Capacity up to 160 L/min(9.6m³ /h)

Head up to 85m

Liquid Type: Clean water

Typology: Surface

Family: Self-priming

Application Limits

Manometric suction lift up to 9 m

Liquid temperature up to +40°C

Ambient temperature up to +40°C



Installation & Use

They are recommended for pumping clean water without abrasive particles, and liquids that are chemically non aggressive for the materials of which the pump is made. Widely used in well water lifting, garden irrigation, vegetable greenhouse water supply, breeding industry water supply and drainage, pipeline boosting, etc.

Construction

Pump Body: Cast iron.

Impeller: Stainless steel.

Motor Shaft: stainless steel


Mechanical Seal: Ceramic - graphite.

Electric Motor: Single-phase 220-240V/50Hz with condenser and thermal overload protector built into the copper winding.

Insulation: Class F.


Protection: IP 44.

Performance

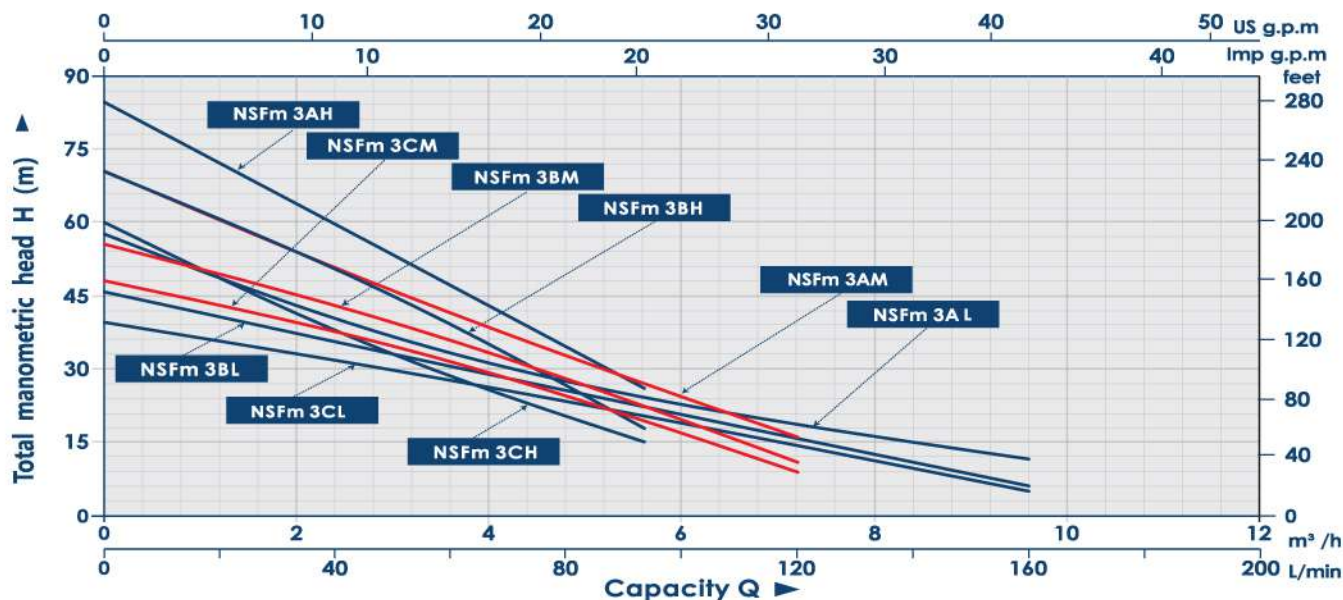


Model	Power		Current	Size	Q(m³/h)	Capacity Q (L/min)														
	KW	HP				A	Inch	Q(L/min)	0	0.9	1.8	2.7	3.0	4.2	4.8	5.4	6.6	7.2	7.8	8.4
NSFm3CH	1.1	1.5	7	1 ¼"x1"	H(m)	60	47.7	39.8	34.5	32.7	29	24	15	-	-	-	-	-	-	
NSFm3BH	1.5	2	9.4	1 ¼"x1"		70	58.7	52	47	45	33	26	18	-	-	-	-	-	-	
NSFm3AH	2.2	3	13.7	1 ¼"x1"		85	71	64	56	53	47	30	26	-	-	-	-	-	-	
NSFm3CM	1.1	1.5	7	1 ¼"x1"		48	44	39.8	36.1	34.8	30.9	28.6	25	19	9	-	-	-	-	
NSFm3BM	1.5	2	9.4	1 ¼"x1"		56	50.7	46.4	42	40.5	35.5	32.9	30.4	21.6	11	-	-	-	-	
NSFm3AM	2.2	3	13.7	1 ¼"x1"		70	67	63	54	46	40	36	32	23	16	-	-	-	-	
NSFm3CL	1.1	1.5	7	1 ¼"x1 ¼"		40	37.2	33.7	30.3	29.5	26.6	25.1	23.7	20.7	14	12	10	5		
NSFm3BL	1.5	2	9.4	1 ¼"x1 ¼"		46	44	40.6	35.7	33	30	27.5	25.6	22.3	20	16	11	6		
NSFm3AL	2.2	3	13.7	1 ¼"x1 ¼"		58	54	50	40	37	34	30	27.5	23	21	18	14	12		

Diagram

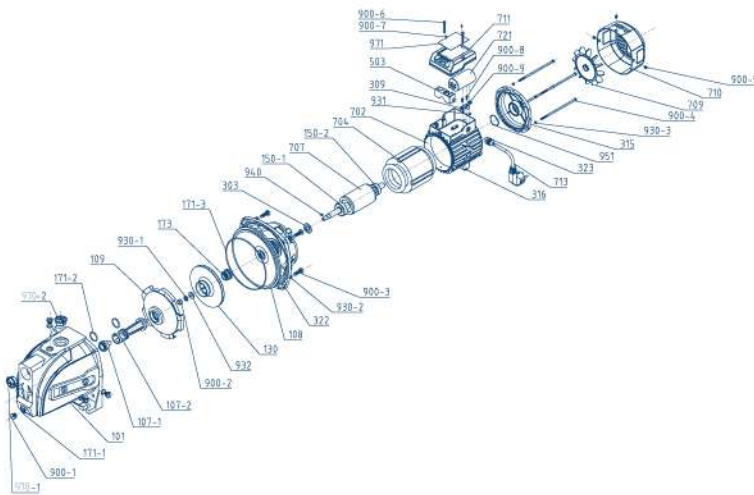


101	Pump body	709	Fan
107-1	Injector	710	Fan cover
107-2	Nozzle	711	Terminal box cover
108	Pump cover	900-1	Slotted hexagon bolt
109	Guide vane	900-2	Slotted hexagon nut
130	Impeller	900-3	Hexagon headed bolt
150-1	Bearing	900-4	Hexagon headed bolt
150-2	Bearing	900-5	Phillips pan head screw
171-1	O ring	900-6	Phillips pan head screw
171-2	O ring	900-7	Nameplate rivet
171-3	O ring	900-8	Phillips pan head screw
173	Mechanical seal	900-9	Crossed round head screw with washer
303	Water retaining ring	930-1	Spring washer
309	Cable pressing plate	930-2	Spring washer
315	End cover	930-3	Spring washer
316	Foot	931	External tooth lock washer
322	Coupling	932	Flat washer
323	Cable gland	940	Key
503	Terminal Block	951	Wave washer
702	Barrel	970-1	Dust cover
703	Stator core with winding	970-2	Dust cover
707	Rotor	971	Nameplate

Product Parameters

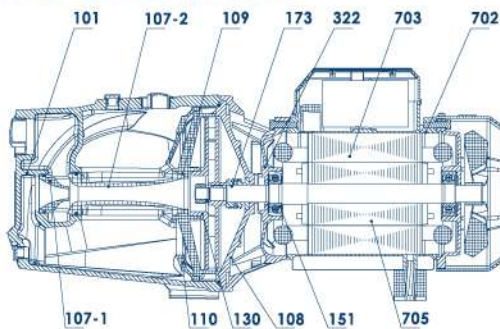

POS.	COMPONENT	CONSTRUCTION CHARACTERISTICS
101	PUMP BODY	Cast iron
107-1	INJECTOR	
107-2	NOZZLE	Plastic PPO
108	PUMP COVER	Cast iron
109	GUIDR VANE	Plastic PPO
110	GUIDE VANE COVER	Plastic PPO
130	IMPELLER	Stainless steel
151	BEARING	6202-2RZ
173	MECHANICAL SEAL	Ceramic - graphite
322	COUPLING	
702	BARREL	
703	STATOR	Stator core with winding
705	ROTOR	

Product Dimensions

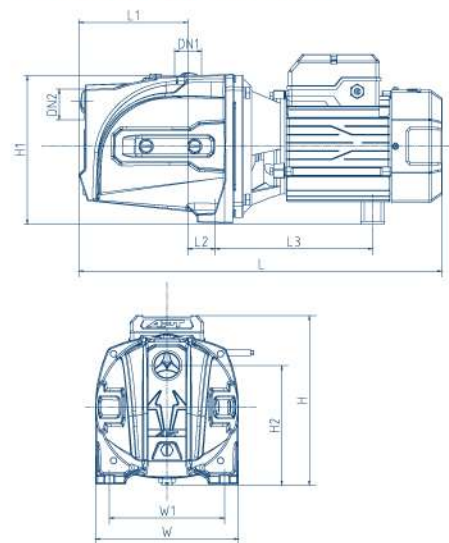

Model	DN1	DN2	Dimension(mm)								
			L	W	H	L1	L2	L3	W1	H1	H2
NSFm3CH	1"	1"	522	206	244	157	40	227	166	213	170
NSFm3BH	1"	1"	522	206	244	157	40	227	166	213	170
NSFm3AH	1"	1"	522	206	244	157	40	227	166	213	170
NSFm3CM	1"	1"	522	206	244	157	40	227	166	213	170
NSFm3BM	1"	1"	522	206	244	157	40	227	166	213	170
NSFm3AM	1"	1"	522	206	244	157	40	227	166	213	170
NSFm3CL	1"	1"	522	206	244	157	40	227	166	213	170
NSFm3BL	1"	1"	522	206	244	157	40	227	166	213	170
NSFm3AL	1"	1"	522	206	244	157	40	227	166	213	170

GJSM

Jet Pump

Capacity up to 67 L/min(4m³/h)

Head up to 55m

Liquid Type: Clean water

Typology: Surface

Family: Self-priming

Application Limits

Manometric suction lift up to 9 m

Liquid temperature up to +40°C

Ambient temperature up to +40°C



Installation & Use

They are recommended for pumping clean water without abrasive particles, and liquids that are chemically non aggressive for the materials of which the pump is made. As a result of their reliability and the fact that they are easy to use, these pumps are widely used in the domestic place and particular in distributing water in combination with small autoclaves, for transferring liquids and for the irrigating applications. The pumps should be installed in enclosed environment, or at least sheltered from inclement weather.

Construction

Pump Body: Stainless steel.

Impeller: PPO.

Motor Shaft: 304 stainless steel shaft.


Mechanical Seal: Ceramic - graphite.

Electric Motor: Single-phase 220-240V/50Hz with condenser and thermal overload protector built into the copper winding.

Insulation: Class F.


Protection: IP 44.

Performance

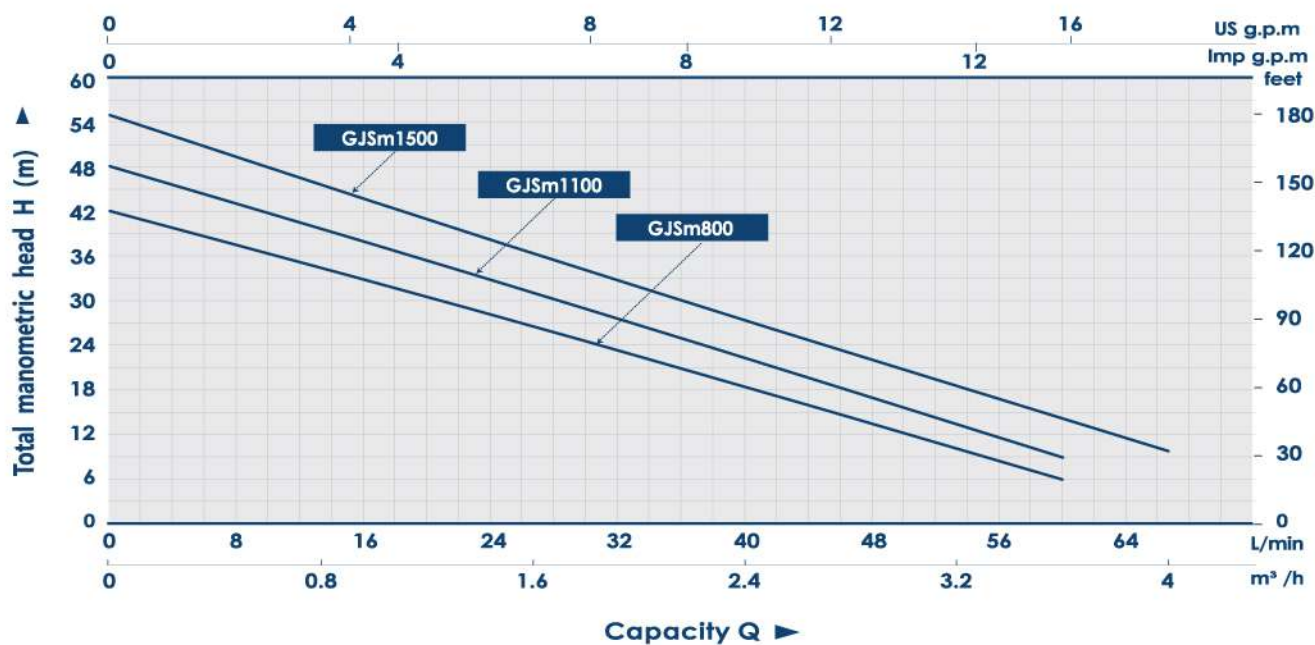


Model	Power		Current	Size	Q(m³/h)	0	0.3	0.6	0.9	1.2	1.8	2.1	3.0	3.6	4	
	KW	HP				A	Inch	Q(L/min)	0	5	10	15	20	30	35	50
GJSm800	0.8	1.1	42	1"×1"	H(m)	42	40	36.3	34	30.5	26.1	24.2	15.1	6	-	
GJSm1100	1.1	1.5	48	1"×1"		48	43.1	40.2	37.2	35	30	27.2	15	9	-	-
GJSm1500	1.5	2	55	1"×1"		55	50.4	47.2	44	40.7	35.4	33.3	27.3	16	10	-

Diagram

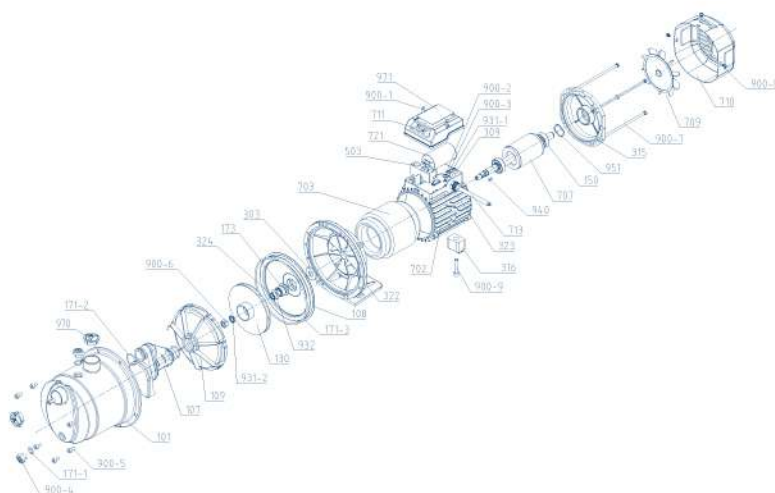


101	Pump body	711	Terminal box cover
107	Injector	713	Cable
108	Pump cover	721	Run capacitor
109	Guide vane	900-1	Phillips pan head screw
130	Impeller	900-2	Screw
150	Bearing	900-3	Phillips pan head screw
171-1	O ring	900-4	Vent cock
171-2	O ring	900-5	Hexagon socket head cap screw
171-3	O ring	900-6	Lock nut
173	Mechanical seal	900-7	Hexagon headed bolt
303	Water retaining ring	900-8	Screw
309	Cable pressing plate	900-9	Crossed round head screw with washer
315	End cover	930-1	Spring washer
316	Foot	930-2	Spring washer
322	Coupling	930-3	Spring washer
323	Cable gland	931-1	External tooth lock washer
324	Snap Spring	931-2	External tooth lock washer
503	Terminal Block	932	Flat washer
702	Barrel	940	Key
703	Stator core with winding	951	Wave washer
707	Rotor	970	Dust cover
709	Fan	971	Nameplate
710	Fan cover		

Product Parameters

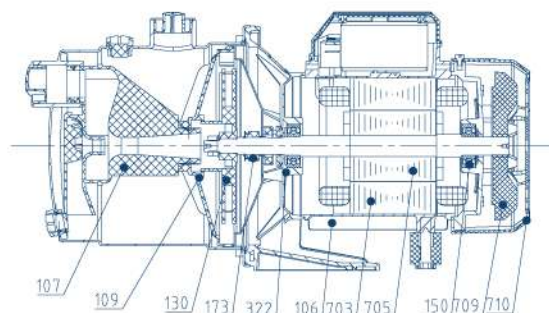

POS.	COMPONENT	CONSTRUCTION CHARACTERISTICS
106	PUMP CASING	Cast iron
107	EJECTOR	Imported engineering plastics
109	GUIDR VANE	Imported engineering plastics
130	IMPELLER	Plastic PPO
150	BEARING	6202-2RZ
173	MECHANICAL SEAL	Ceramic - graphite
322	COUPLING	Cast iron
703	STATOR	Stator core with winding
707	ROTOR	
709	FAN	Plastic
710	FAN COVER	Plastics ABS

Product Dimensions

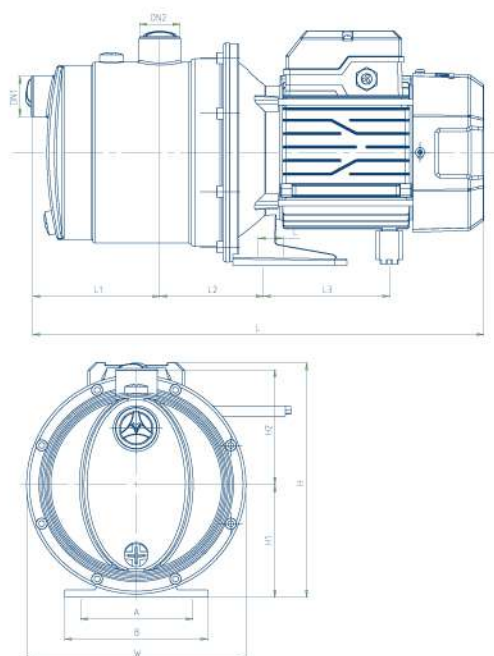

Model	DN1	DN2	Dimension(mm)										
			L	W	H	H1	H2	L1	L2	L3	A	B	C
GJSm800	1"	1"	403	195	209	100.5	102	113	92	112.5	95	127.5	21
GJSm1100	1"	1"	403	195	209	100.5	102	113	92	112.5	95	127.5	21
GJSm1500	1"	1"	403	195	209	100.5	102	113	92	112.5	95	127.5	21

JSPM

Jet Pump

Capacity up to 60 L/min(3.6m³/h)

Head up to 48m

Liquid Type: Clean water

Typology: Surface

Family: Self-priming

Application Limits

Manometric suction lift up to 9 m

Liquid temperature up to +40°C

Ambient temperature up to +40°C



Installation & Use

They are recommended for pumping clean water without abrasive particles, and liquids that are chemically non aggressive for the materials of which the pump is made. As a result of their reliability and the fact that they are easy to use, these pumps are widely used in the domestic place and particular in distributing water in combination with small autoclaves, for transferring liquids and for the irrigating applications. The pumps should be installed in enclosed environment, or at least sheltered from inclement weather.

Construction

Pump Body: PPO.

Impeller: PPO.


Motor Shaft: 304 stainless steel shaft.

Mechanical Seal: Ceramic - graphite.

Insulation: Class F.


Protection: IP 44.

Performance

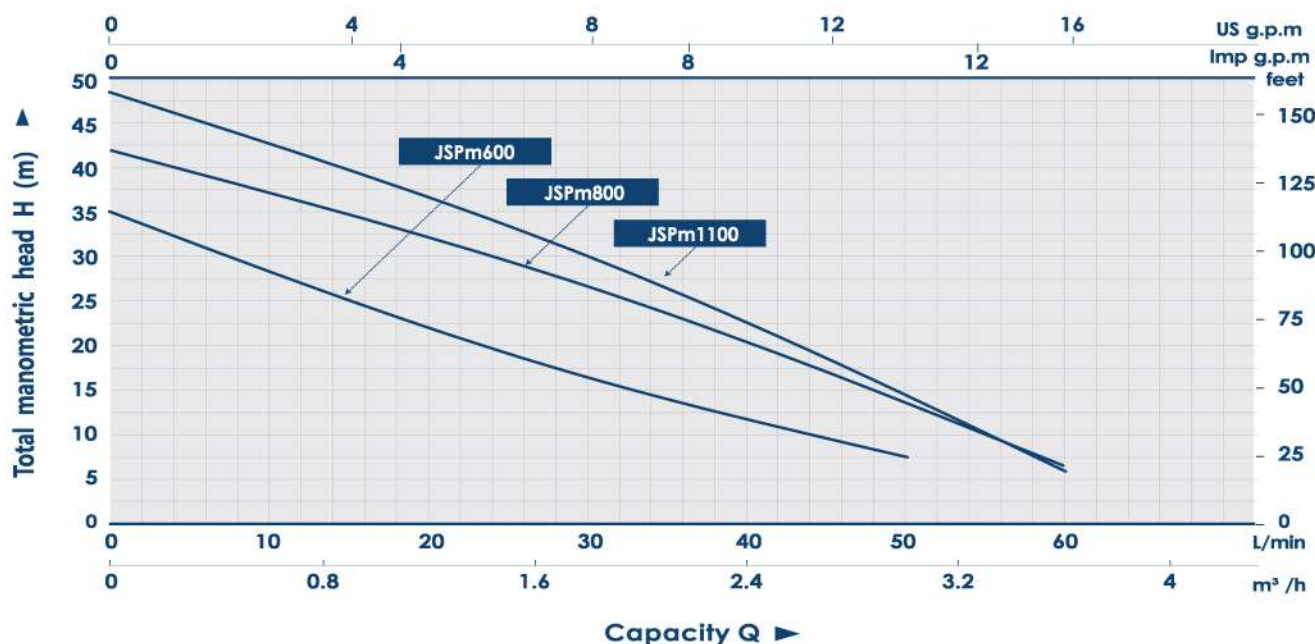


Model	Power		Current	Size	Q(m ³ /h)	0	0.3	0.6	0.9	1.2	1.8	2.1	2.4	3	3.6
	KW	HP				0	5	10	15	20	30	35	40	50	60
JSPm600	0.6	0.8	4.2	1"x1"	H(m)	35	31.4	27.9	24.5	21.7	16.7	14.6	13.3	7.5	-
JSPm800	0.8	1.1	5.5	1"x1"		42	38.5	34.5	32.1	30	26.5	24.8	23.3	18.5	6.6
JSPm1100	1.1	1.5	7	1"x1"		48	43	38.5	37	34.8	29.9	28	26	16	5.8

Diagram

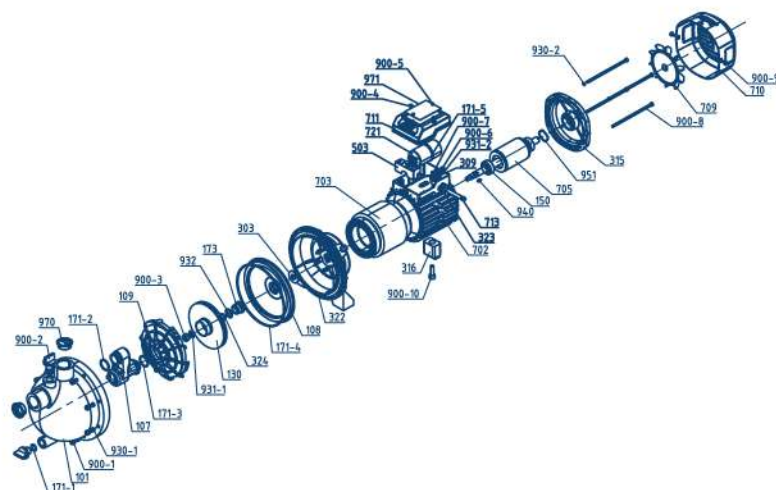



101	Pump body	710	Fan cover
107	Injector	711	Terminal box cover
108	Pump cover	713	Cable
109	Guide vane	721	Run capacitor
130	Impeller	900-1	Hexagon socket head cap screw
150	Bearing	900-2	Vent cock
171-1	O ring	900-3	Lock nut
171-2	O ring	900-4	Phillips pan head screw
171-3	O ring	900-5	Nameplate rivet
171-4	O ring	900-6	Screw
171-5	O ring	900-7	Phillips pan head screw
173	Mechanical seal	900-8	Hexagon headed bolt
303	Water retaining ring	900-9	Screw
309	Cable pressing plate	900-10	Hexagon socket head cap screw
315	End cover	930-1	Spring washer
316	Foot	930-2	Spring washer
322	Coupling	931-1	External tooth lock washer
323	Cable gland	931-2	External tooth lock washer
503	Terminal Block	932	Flat washer
702	Barrel	940	Key
703	Stator core with winding	951	Wave washer
707	Rotor	970	Dust cover
709	Fan	971	Nameplate

Product Parameters

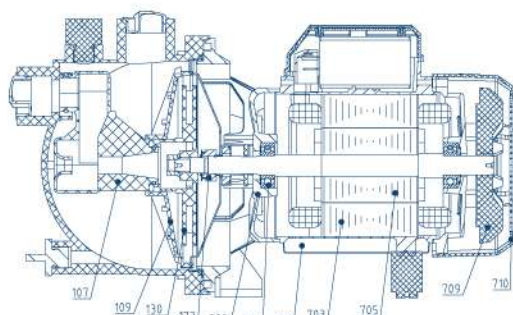

POS.	COMPONENT	CONSTRUCTION CHARACTERISTICS
106	PUMP CASING	Cast iron
107	EJECTOR	Plastic PPO
109	GUIDR VANE	Plastic PPO
130	IMPELLER	Plastic PPO
150	BEARING	C&U bearing
173	MECHANICAL SEAL	Graphite - Ceramic
322	COUPLING	Cast iron
703	STATOR	Stator core with winding
707	ROTOR	Stainless steel
709	FAN	Plastic
710	FAN COVER	Plastics ABS

Product Dimensions

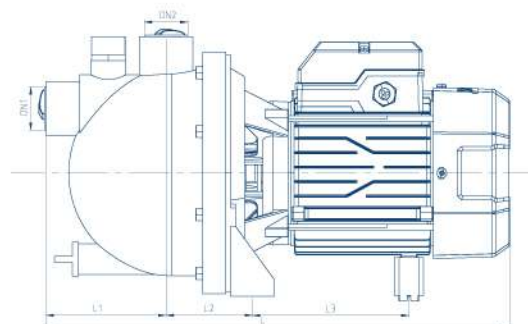

Model	DN1	DN2	Dimension(mm)							
			L	W	H	H1	L1	L2	L3	W1
JSPm600	1"	1"	355	163	175	125	85	85	105	130
JSPm800	1"	1"	400	200	215	165	100	75	130	140
JSPm1100	1"	1"	400	200	215	165	100	75	130	140

QB

Peripheral Pump

Capacity up to 83 L/min(5m³ /h)

Head up to 78m

Liquid Type: Clean water
Applications: Water supply systems,
pressure systems, irrigation pumps
Typology: Surface
Family: Peripheral

Application Limits

Manometric suction lift up to 8 m
Liquid temperature up to +40°C
Ambient temperature up to +40°C




Installation & Use

They are recommended for pumping clean water without abrasive particles, and liquids that are chemically non aggressive for the materials of which the pump is made. As a result of their reliability and the fact that they are easy to use and are economical, these pumps are suitable for domestic use and in particular for distribution water in combination with small pressure sets and for the irrigation of gardens and allotments. The pumps should be installed in enclosed environment, or at least sheltered from inclement weather.

Construction


Pump Body: Cast iron.
Impeller: Brass, with radial peripheral vanes.
Motor Shaft: stainless steel
Mechanical Seal: Ceramic-graphite.
Electric Motor: Single-phase 220-240V/50Hz with condenser and thermal overload protector built into the copper winding.
Insulation: Class F.
Protection: IP 44.

Performance

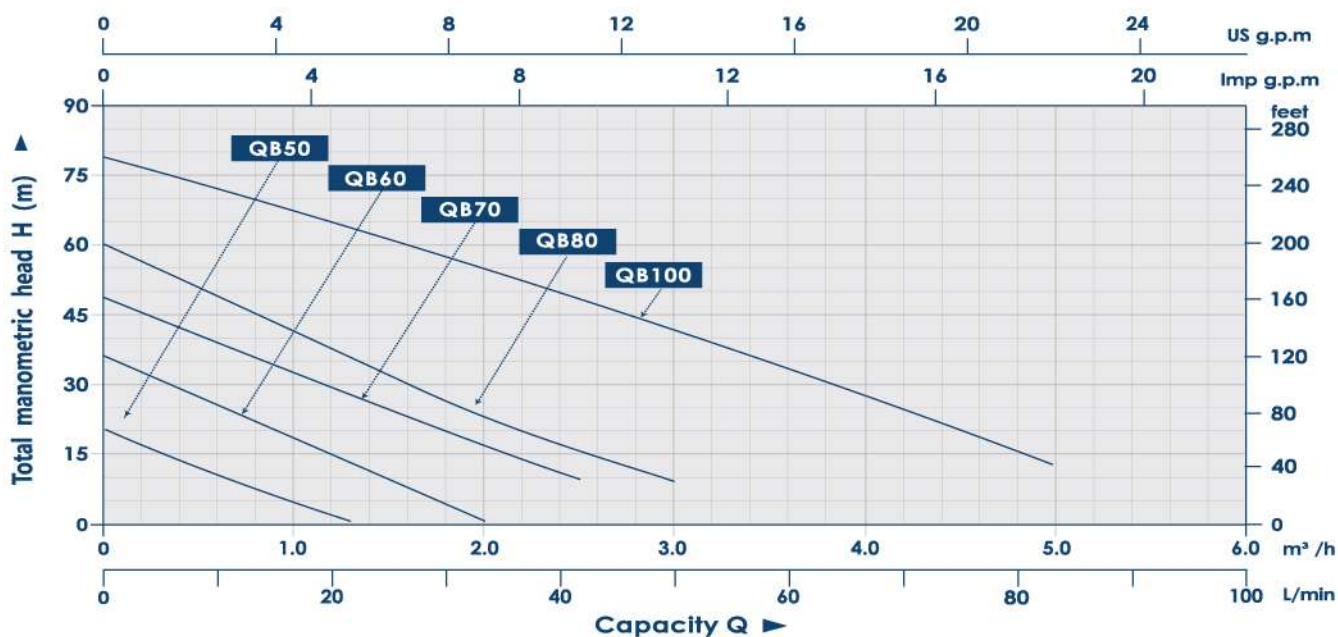


Model	Power		Current	Size	Q(m³/h)	0	0.3	0.6	0.9	1.2	1.5	1.8	2	2.4	3	3.6	4.2	4.8
	KW	HP				A	Inch	Q(L/min)	0	5	10	15	20	25	30	33	40	50
QB50	0.125	0.17	1	1"×1"	H(m)	20	15.7	10.7	6.7	1.8	-	-	-	-	-	-	-	-
QB60	0.37	0.5	2.7	1"×1"		36	30.7	24.8	19.3	14.8	8.5	2.5	-	-	-	-	-	-
QB70	0.55	0.75	3.9	1"×1"		48	46	40.7	34.9	29.6	24.4	19.7	15.2	11	-	-	-	-
QB80	0.75	1	5.1	1"×1"		60	55.7	50.2	44.1	37	28.7	26.7	23.8	19.3	9.7	-	-	-
QB100	1.5	2	9.4	1"×1"		78	76	73.5	71.1	66.9	62.4	57.8	53.3	49.2	40.7	31.7	22.9	16.1

Diagram

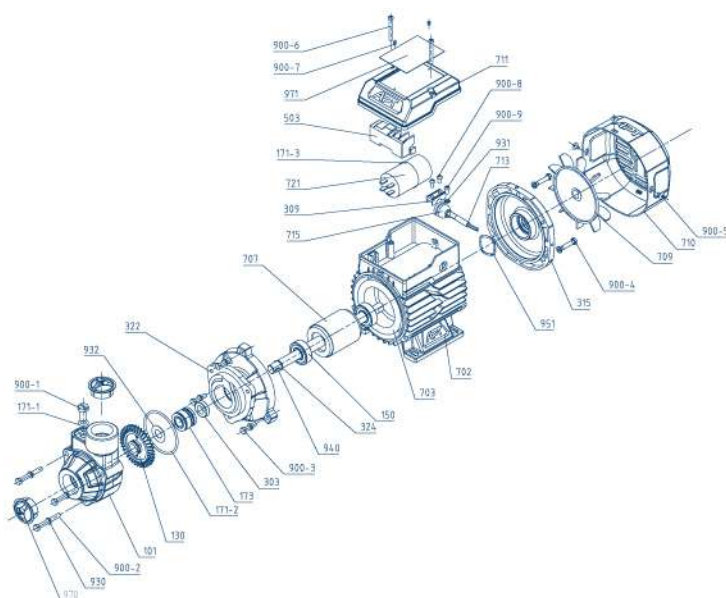


- | | |
|-------------------------------------|---|
| 101 Pump body | 713 Cable |
| 130 Impeller | 715 Cable sheath |
| 150 Bearing | 721 Run capacitor |
| 171-1 O ring | 900-1 Hexagon headed bolt |
| 171-2 O ring | 900-2 Hexagon headed bolt |
| 171-3 O ring | 900-3 Hexagon headed bolt |
| 173 Mechanical Seal | 900-4 Hexagon headed bolt |
| 303 Water Retaining Ring | 900-5 Phillips pan head screw |
| 309 Cable pressing plate | 900-6 Phillips pan head screw |
| 315 End cover | 900-7 Nameplate rivet |
| 322 Connector | 900-8 Phillips pan head screw |
| 324 Snap Spring | 900-9 Crossed round head screw with washer |
| 503 Terminal block | 930 Spring Washer |
| 702 Barrel | 931 External tooth lock washer |
| 703 Stator core with winding | 932 Flat Washer |
| 707 Cast aluminum rotor | 940 key |
| 709 Fan | 951 Wave washer |
| 710 Fan cover | 970 Dust cover |
| 711 Terminal box | 971 Nameplate |

Product Parameters

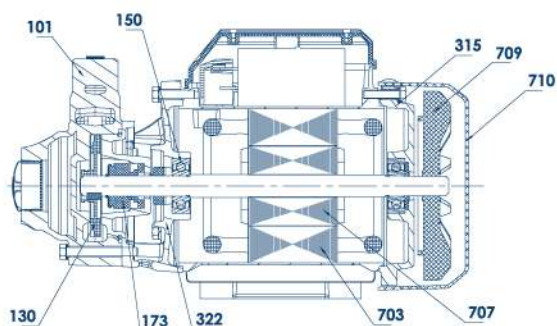

POS.	COMPONENT	CONSTRUCTION CHARACTERISTICS
101	PUMP BODY	Cast iron
130	IMPELLER	Brass
150	BEARING	6201-2RZ
173	MECHANICAL SEAL	Ceramic - graphite
315	END COVER	Cast iron
322	COUPLING	Cast iron
703	STATOR CORE	Stator core with winding
707	ROTOR	Cast aluminum rotor
709	FAN	Plastics
710	FAN COVER	Plastics ABS

Product Dimensions

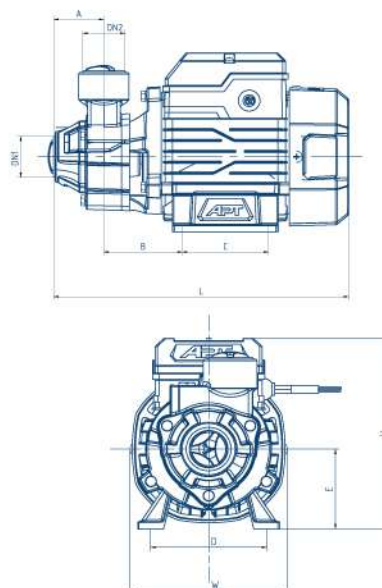

Model	DN1	DN2	Dimension(mm)							
			L	W	H	A	B	C	D	E
QB50	1"	1"	224.5	130	158.8	40	59	55	103.5	65
QB60	1"	1"	250	126	157	41.5	67	73.5	92	66
QB70	1"	1"	283	149.5	182.5	47.5	67.5	90.5	112.5	74
QB80	1"	1"	283	149.5	182.5	47.5	67.5	90.5	112.5	74
QB100	1"	1"	336	174	213.5	57	86	100	124.5	85

CPM

Centrifugal Pump

Capacity up to 133 L/min(8m³/h)

Head up to 48m

Application Limits

Maximum operating depth 7m below water level

Liquid temperature +40°C

Ambient temperature up to +40°C




Installation & Use

They are recommended for pumping clean water without abrasive particles, and liquids that are chemically non aggressive for the materials of which the pump is made. As a result of their reliability and the fact that they are easy to use, these pumps are widely used in domestic and civil applications such as the distribution of water in combination with small and medium sized pressure sets, for transferring liquids and for the irrigation of gardens and allotments. The pumps should be installed in enclosed environment, or at least sheltered from inclement weather.

Construction

Pump Body: Cast iron
Impeller: stainless steel
Motor Shaft: 304 stainless steel shaft
Mechanical Seal: Ceramic - graphite
Electric Motor: Cpm:Single-phase 220-240V/50Hz with condenser and thermal overload protector built into the copper winding.
Insulation: Class F.
Protection: IP 44.


Performance

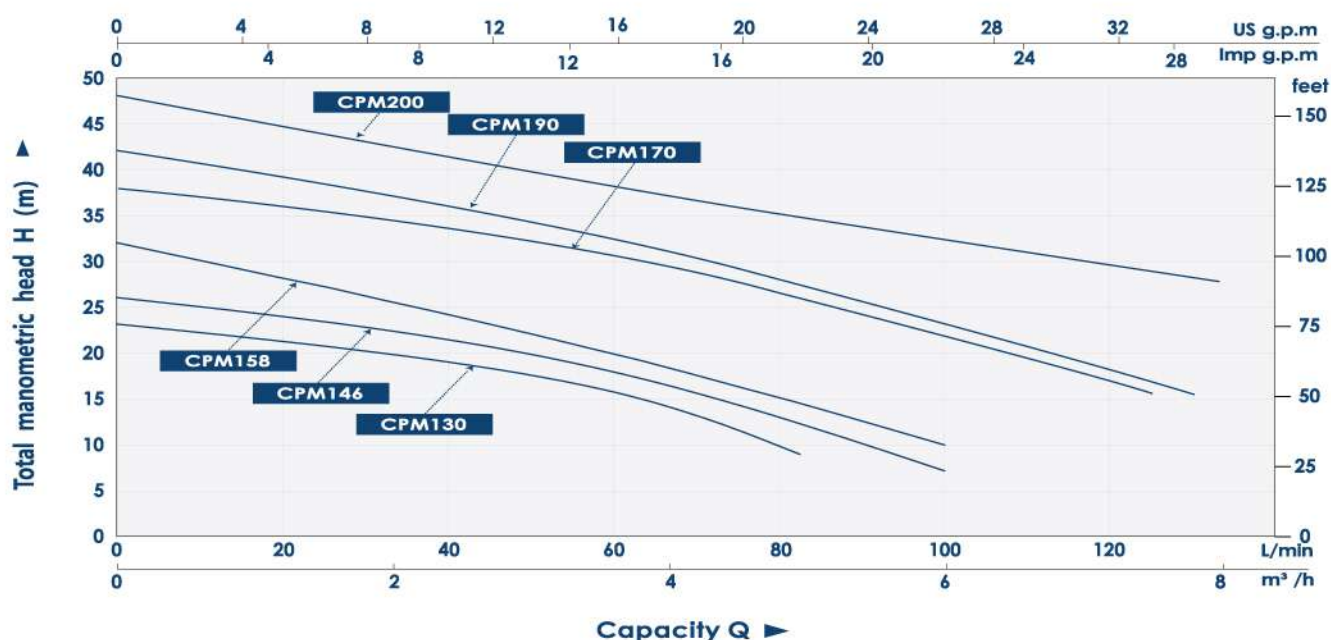

Model	Power		Current	Size	Q(m³/h)	0	0.9	1.8	2.7	3.6	4.5	5.4	6.3	7.2	8	
	KW	HP	A	Inch	Q(L/min)	0	15	30	45	60	75	90	105	120	133	
CPm130	0.37	0.5	3	1"x1"	H(m)	23	21.9	20.5	18.6	15.8	11.7	-	-	-	-	
CPm146	0.55	0.75	4.5	1"x1"		26	23.4	21.8	20	17.8	14.4	10	-	-	-	
CPm158	0.75	1	6.4	1"x1"		32	25.7	24.5	22.6	19.8	16.8	12.6	-	-	-	
CPm170	1.1	1.5	8.2	1¼"x1"		38	36	34	32.3	30.6	27.1	23.8	21.6	16.9	-	
CPm190	1.5	2	10.9	1"x1"		42	38.7	36.4	34.2	32.5	29.7	25.2	22.6	18.2	-	
CPm200	2.2	3	14	1"x1"			48	46	43.5	40.7	38.1	36.3	34.6	33	30.6	27.9


Centrifugal Pump

Diagram

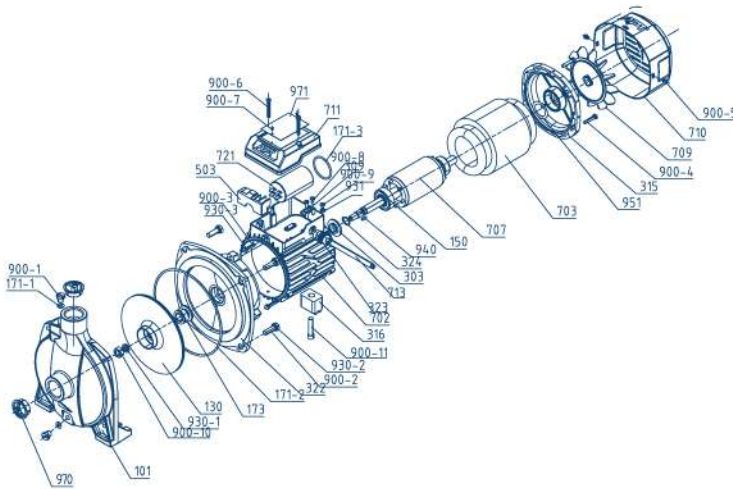


101	Pump body	721	Run capacitor
130	Impeller	900-1	Vent cock
150	Bearing	900-2	Hexagon headed bolt
171-1	O ring	900-3	Hexagon headed bolt
171-2	O ring	900-4	Hexagon headed bolt
171-3	O ring	900-5	Phillips pan head screw
173	Mechanical seal	900-6	Phillips pan head screw
303	Water retaining ring	900-7	Nameplate rivet
309	Cable pressing plate	900-8	Phillips pan head screw
315	End cover	900-9	Cross recessed round head screw with washer
316	Foot	900-10	Slotted hexagon nut
322	Coupling	900-11	Hexagon socket head cap screw
323	Cable gland	930-1	Spring washer
324	Circlip	930-2	Spring washer
503	Terminal Block	930-3	Spring washer
702	Barrel	931	External tooth Lock washer
703	Stator core with winding	940	Key
707	Rotor	951	Wave washer
709	Fan	970	Dust cover
710	Fan cover	971	Nameplate
711	Terminal box		
713	Cable		

Product Parameters

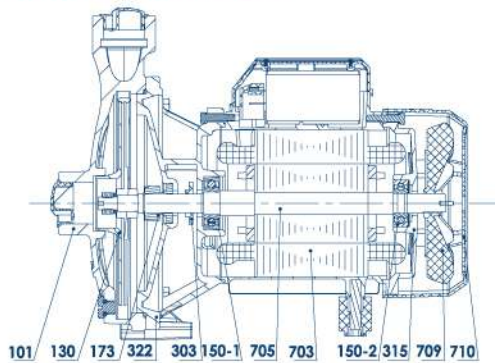

POS.	COMPONENT	CONSTRUCTION CHARACTERISTICS
101	PUMP BODY	Cast iron
130	IMPELLER	Stainless steel
150-1	BEARING	6202-2RZ
150-2	BEARING	6202-2RZ
173	MECHANICAL SEAL	Ceramic - graphite
303	WATER RETAINING RING	Rubber
315	END COVER	Cast iron
322	COUPLING	Cast iron
703	STATOR	Stator core with winding
705	ROTOR	
709	FAN	Plastic PP
710	FAN COVER	Plastic ABS

Product Dimensions

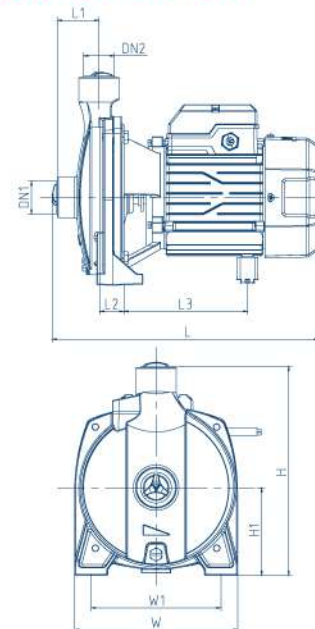

Model	DN1	DN2	Dimension(mm)							
			L	W	H	L1	L2	L3	W1	W2
CPm130	1"	1"	269	161	217	45	35	114	125	87
CPm146	1"	1"	312	175	231	48.5	36	131	140	100
CPm158	1"	1"	312	190	248	48.5	40.5	132.5	151	103
CPm170	1.25"	1"	359	205	274	50.5	38	169	164	119
CPm190	1"	1"	355	229	296	50.5	41	155	187	126
CPm200	1"	1"	418	229	282	50.5	41	184	187	117

2CPM

Centrifugal Pump

Capacity up to 233 L/min(14m³/h)

Head up to 61.6m

Application Limits

Manometric suction lift up to 7 m

Liquid temperature +40°C

Ambient temperature up to +40°C




Installation & Use

They are recommended for pumping clean water without abrasive particles, and liquids that are chemically non aggressive for the materials of which the pump is made. As a result of their reliability and the fact that they are easy to use, these pumps are widely used in domestic and civil applications such as the distribution of water in combination with small and medium sized pressure sets, for transferring liquids and for the irrigation of gardens and allotments. The pumps should be installed in enclosed environment, or at least sheltered from inclement weather.

Construction


Pump Body: Cast iron
Impeller: Brass with centrifugal radial flow type.
Motor Shaft: 304 stainless steel shaft.
Mechanical Seal: Ceramic - graphite.
Electric Motor: 2CPm: Single-phase 220-240V/50Hz with condenser and thermal overload protector built into the copper winding. 2CP: three-phase 380-415V/50Hz.
Insulation: Class F.
Protection: IP 44.

Performance

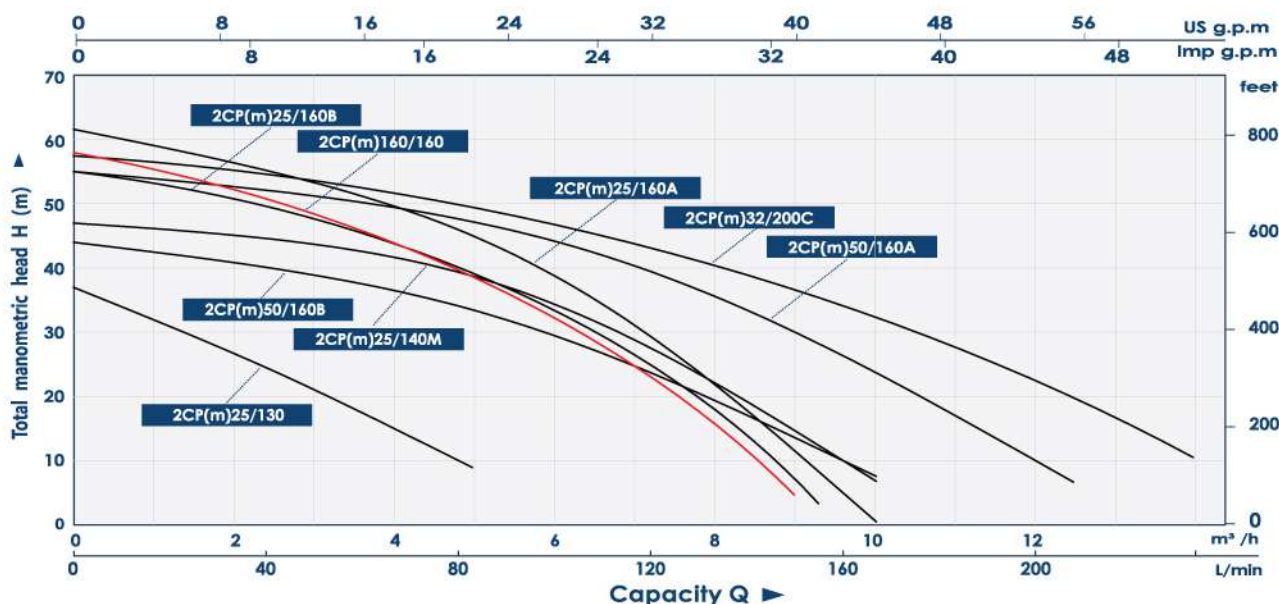


Model	Power		Current(A)		Size	Q(m³/h)	0	2.4	3	4.2	4.8	6	6.6	8.4	9.6	10.8	12	13.2
	KW	HP	1~	3~	Inch	Q(L/min)	0	40	50	70	80	100	110	140	160	180	200	220
2CP(m)25/130	0.75	1	5.5	1.8	1¼"×1"	H(m)	37	24.5	22.1	11.3	10	-	-	-	-	-	-	-
2CP(m)25/140M	1.1	1.5	7.8	3.8	1½"×1"		47	44.2	43.3	41.5	39.4	33.3	30	16.9	10	-	-	-
2CP(m)160/160	1.5	2	11.4	4	1¼"×1"		58	50.3	47.9	43.2	39.7	30.4	26.1	11.6	-	-	-	-
2CP(m)25/160B	1.5	2	10.5	3.8	1¼"×1"		55	50	47	43	40	33.3	29.3	14	-	-	-	-
2CP(m)25/160A	2.2	3	14	5.7	1¼"×1"		61.6	57	53	48	46	42	36.9	21.5	4.5	-	-	-
2CP(m)32/200C	3	4	17.1	6	1½"×1¼"		57.5	54	53	51	49.5	46.8	44.9	40.5	35.5	30.5	24	15.5
2CP(m)50/160B	1.5	2	9	3.9	2"×2"		44	40	37.7	35.3	34.1	29.4	26.9	17	10	-	-	-
2CP(m)50/160A	2.2	3	13.2	5.9	2"×2"		55	52.5	51.5	49.1	47.5	44.2	41.4	34	23.9	20	10	-

Diagram

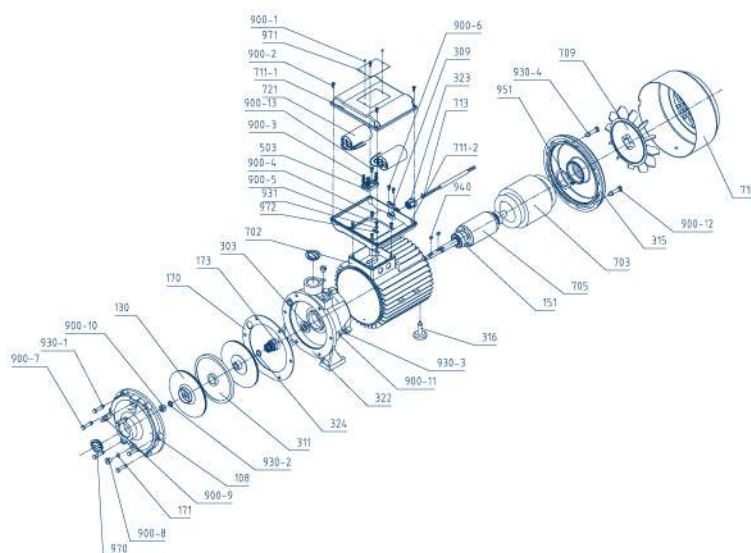


108	Pump cover	900-1	Nameplate rivet
130	Impeller	900-2	Phillips pan head screw
151	Deep groove ball bearings	900-3	Slotted hexagon nut
171	O ring	900-4	Phillips pan head screw
173	Mechanical seal	900-5	Screw
303	Water retaining ring	900-6	Phillips pan head screw
309	Cable pressing plate	900-7	Hexagon headed bolt
311	Baffle	900-8	Slotted cylinder head screw
315	End cover	900-9	Vent cock
316	Foot	900-10	Slotted hexagon nut
322	Coupling	900-11	Slotted cylinder head screw
323	Cable gland	900-12	Slotted cylinder head screw
324	Circlip	900-13	Phillips pan head screw
503	Terminal	930-1	Spring washer
702	Barrel	930-2	Spring washer
703	Stator core with winding	930-3	Spring washer
705	Rotor	930-4	Spring washer
709	Fan	931	External tooth Lock washer
710	Fan cover	940	Key
711-1	Terminal box cover	951	Wave washer
711-2	Terminal box lower Cover	970	Dust cover
713	Cable	971	Nameplate
721	Capacitor	972	Ground sign

Product Parameters

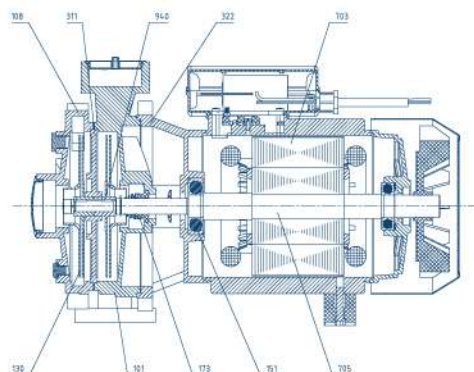

POS.	COMPONENT	CONSTRUCTION CHARACTERISTICS
101	PUMP BODY	Cast iron
108	PUMP COVER	Cast iron
130	IMPELLER	Double impeller, brass
151	BEARING	Deep groove ball bearings
173	MECHANICAL SEAL	Ceramic/Graphite/Nitrile rubber
311	BAFFLE	Cast iron
322	COUPLING	Cast iron
703	STATOR CORE	Stator core with winding
705	ROTOR	Stainless steel
940	KEY	Stainless steel

Product Dimensions

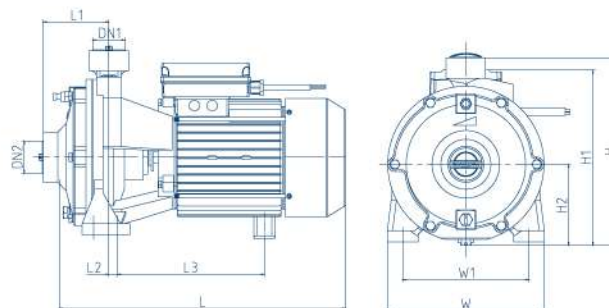

Model	DN1	DN2	Dimension(mm)								
			L	W	H	L1	L2	L3	W1	H1	H2
2CP(m)25/130	1"	1.25"	335	185	225	72	15	158	150	205	85
2CP(m)25/140M	1"	1.5"	420	225	265	90	25	195	180	260	110
2CP(m)160/160	1"	1.25"	420	225	265	90	25	195	180	260	110
2CP(m)25/160B	1"	1.5"	420	225	265	90	25	195	180	260	110
2CP(m)25/160A	1"	1.5"	450	240	290	100	40	205	190	270	120
2CP(m)32/200C	1.25"	1.5"	480	255	320	105	35	213	222	290	135
2CP(m)50/160B	2"	2"	445	225	285	85	65	215	150	270	125
2CP(m)50/160A	2"	2"	430	225	285	85	65	230	150	270	125

2CP

Centrifugal Pump

Capacity up to 350 L/min(21m³/h)

Head up to 84 m

Application Limits

Manometric suction lift up to 7 m

Liquid temperature +40°C

Ambient temperature up to +40°C




Installation & Use

They are recommended for pumping clean water without abrasive particles, and liquids that are chemically non aggressive for the materials of which the pump is made. As a result of their reliability and the fact that they are easy to use, these pumps are widely used in domestic and civil applications such as the distribution of water in combination with small and medium sized pressure sets, for transferring liquids and for the irrigation of gardens and allotments. The pumps should be installed in enclosed environment, or at least sheltered from inclement weather.

Construction


Pump Body: Cast Iron
Impeller: Brass with centrifugal radial flow type.
Motor Shaft: 304 stainless steel shaft.
Mechanical Seal: Ceramic - graphite.
Electric Motor: 2CP: three-phase 380-415V/50Hz with condenser and thermal overload protector built into the copper winding.
Insulation: Class F.
Protection: IP 44.

Performance

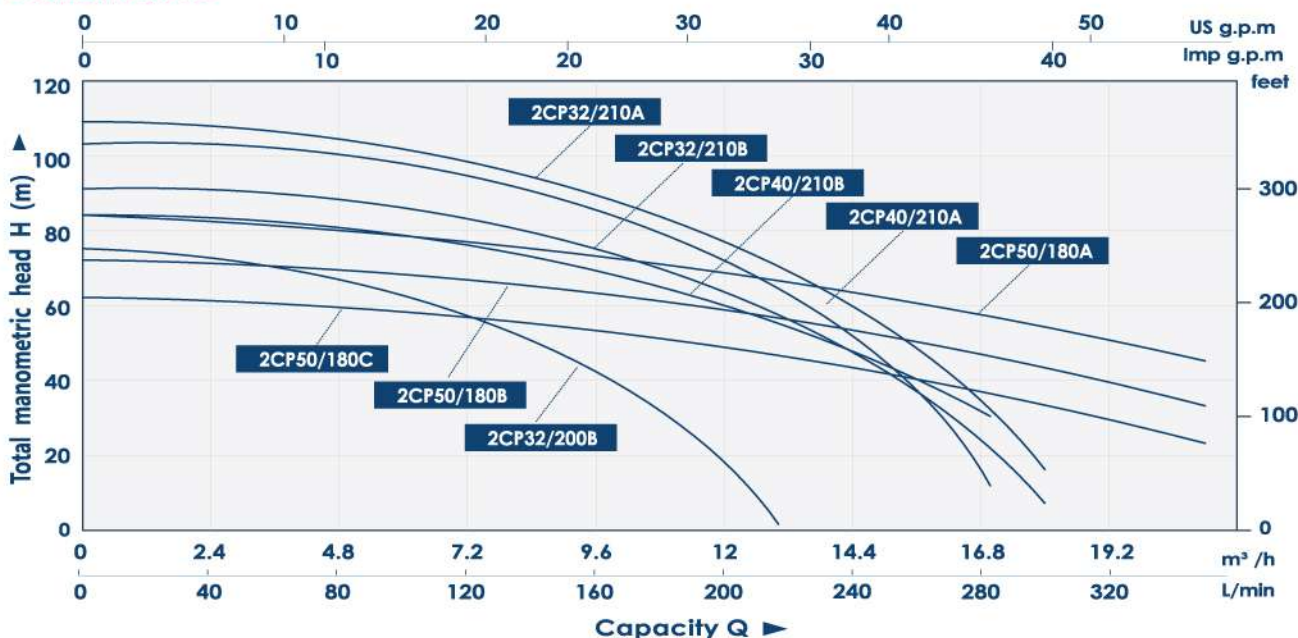


Model	Power		Current	Size	Q(m³/h)	0	4.8	5.4	6	6.6	7.2	8.4	9.6	10.8	12	15	18	21
	KW	HP	A	Inch	Q(L/min)	0	80	90	100	110	120	140	160	180	200	250	300	350
2CP32/200B	4	5.5	9.3	1½"×1¼"	H(m)	75	66	64	62.5	60.5	58	52	43	34	17	-	-	-
2CP32/210B	5.5	7.5	13.7	2"×1¼"		91	88	87	86.5	86	83	81	79	75	70	56	7	-
2CP32/210A	7.5	10	17.3	2"×1¼"		109	102.5	102	101	100	99	97	93	90	85	63	16	-
2CP40/210B	5.5	7.5	14	2"×1½"		84	81	80	79	78	76	75	72	68	64	44	-	-
2CP40/210A	7.5	10	17.3	2"×1½"		103	99	98	96	95	94.5	91.5	88	82	73	45	-	-
2CP50/180C	4	5.5	9.9	2"×2"		62	59	58	57	56	55	55	50	48	44	36	31	23
2CP50/180B	5.5	7.5	14.2	2"×2"		72	69	68	67	66	65	65	60	58	54	46	41	33
2CP50/180A	7.5	10	17.3	2"×2"		84	81	80	79	78	76	75	72	72	66	58	53	45

Diagram

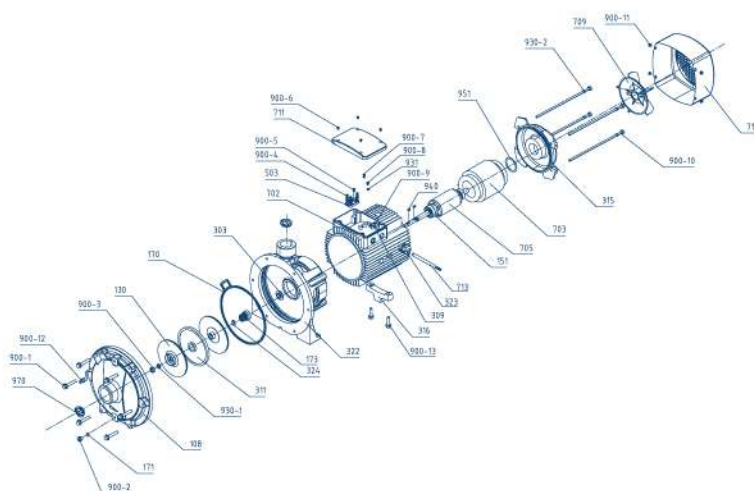


108	Pump cover	713	Cable
130	Impeller	900-1	Hexagon flange bolt
151	Deep groove ball bearings	900-2	Slotted cylinder head screw
170	Gasket	900-3	Slotted hexagon nut
171	O ring	900-4	Slotted hexagon nut
173	Mechanical seal	900-5	Phillips pan head screw
303	Water retaining ring	900-6	Phillips pan head screw
309	Cable pressing plate	900-7	Phillips pan head screw
311	Baffle	900-8	Screw
315	End cover	900-9	Phillips pan head screw
316	Foot	900-10	Hexagon headed bolt
322	Coupling	900-11	Screw
323	Cable gland	900-12	Vent cock
324	Circlip	900-13	Hexagon flange bolt
503	Terminal	930-1	Spring washer
702	Barrel	930-2	Spring washer
703	Stator core with winding	931	External tooth Lock washer
705	Rotor	940	Key
709	Fan	951	Wave washer
710	Fan cover	970	Dust cover
711	Terminal box cover		

Product Parameters

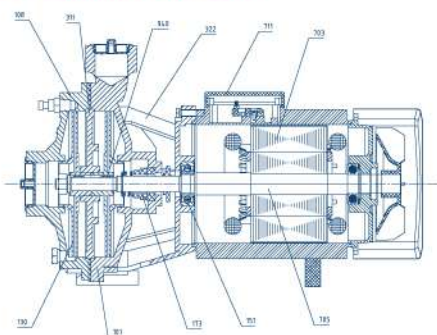

POS.	COMPONENT	CONSTRUCTION CHARACTERISTICS
101	PUMP BODY	Cast iron
108	PUMP COVER	Cast iron
130	IMPELLER	Double impeller, brass
151	BEARING	Deep groove ball bearings
173	MECHANICAL SEAL	Ceramic/Graphite/Nitrile rubber
311	BAFFLE	Cast iron
322	COUPLING	Cast iron
703	STATOR CORE	Stator core with winding
705	ROTOR	Stainless steel
940	KEY	Stainless steel

Product Dimensions

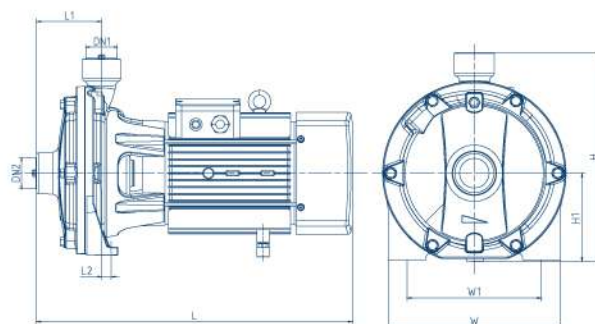

Model	DN1	DN2	Dimension(mm)						
			L	W	H	L1	L2	W1	H1
2CP32/200B	1.25"	1.5"	503	280	317	103	16	205	317
2CP32/210B	1.25"	2"	565	300	352	108	16	215	352
2CP32/210A	1.25"	2"	565	300	352	108	16	215	352
2CP40/210B	1.5"	2"	565	300	352	108	16	215	352
2CP40/210A	1.5"	2"	565	300	352	108	16	215	352
2CP50/180C	2"	2"	565	300	352	108	16	215	352
2CP50/180B	2"	2"	565	300	352	108	16	215	352
2CP50/180A	2"	2"	565	300	352	108	16	215	352

2CP

Centrifugal Pump

Capacity up to 567 L/min(34m³/h)

Head up to 160m

Application Limits


Manometric suction lift up to 7 m

Liquid temperature +40°C

Ambient temperature up to +40°C




Performance

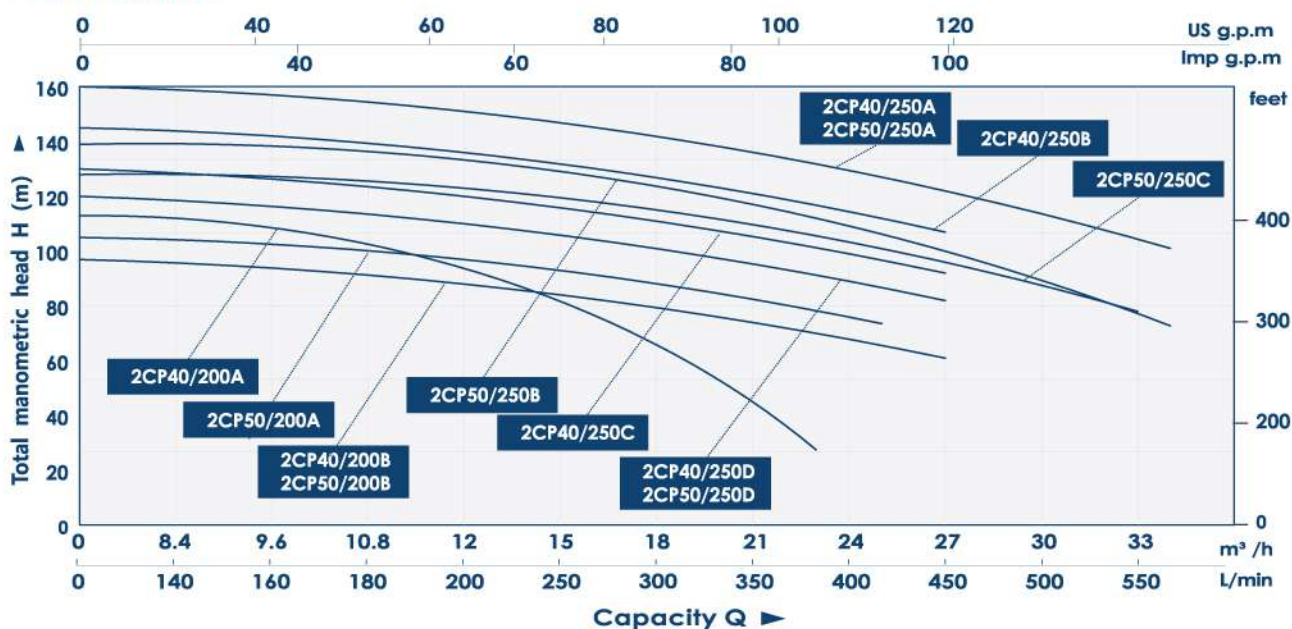

Model	Power		Current	Size	Q(m ³ /h)	0	8.4	9.6	10.8	12	15	18	21	24	27
	KW	HP				0	140	160	180	200	250	300	350	400	450
2CP40/200B	9.2	12.5	20	2"x1½"	H(m)	97	91.5	91	90	88	85	80	74	68	61
2CP40/200A	11	15	23.9	2"x1½"		113	109	107	105	103	93	82	45	-	-
2CP50/200B	9.2	12.5	20	2"x2"		97	91.5	91	90	88	85	80	74	68	61
2CP50/200A	11	15	23.3	2"x2"		105	100	99	98	97	93	88	83	76	-
2CP40/250D	13	17.5	28.2	2"x1½"		120	114	113	112	110	107	103	98	91	82
2CP40/250C	15	20	36	2"x1½"		130	124	123	122	120	117	113	108	102	92
2CP40/250B	18.5	25	40.1	2"x1½"		145	139	138	137	136	131	126	121	114	107
2CP40/250A	22	30	47.7	2"x1½"		160	155	153	152	151	146	141	135	130	122
2CP50/250D	13	17.5	28.2	2"x2"		120	114	113	112	110	107	103	98	91	82
2CP50/250C	15	20	37.5	2"x2"		128	127	125	124	123	122	117	112	108	96
2CP50/250B	18.5	25	42.4	2"x2"		139	138	137	136	135	133	129	123	113	100
2CP50/250A	22	30	51.8	2"x2"		160	155	153	152	151	146	141	135	130	122


Centrifugal Pump

Diagram

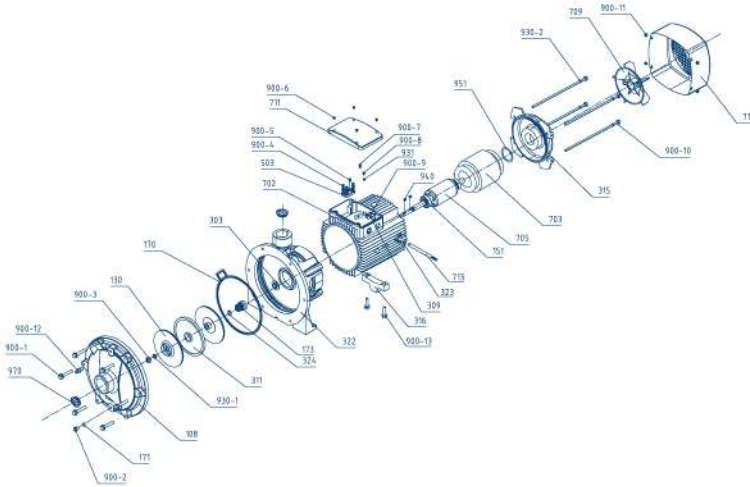


108	Pump cover	713	Cable
130	Impeller	900-1	Hexagon flange bolt
151	Deep groove ball bearings	900-2	Slotted cylinder head screw
170	Gasket	900-3	Slotted hexagon nut
171	O ring	900-4	Slotted hexagon nut
173	Mechanical seal	900-5	Phillips pan head screw
303	Water retaining ring	900-6	Phillips pan head screw
309	Cable pressing plate	900-7	Phillips pan head screw
311	Baffle	900-8	Screw
315	End cover	900-9	Phillips pan head screw
316	Foot	900-10	Hexagon headed bolt
322	Coupling	900-11	Screw
323	Cable gland	900-12	Vent cock
324	Circlip	900-13	Hexagon flange bolt
503	Terminal	930-1	Spring washer
702	Barrel	930-2	Spring washer
703	Stator core with winding	931	External tooth lock washer
705	Rotor	940	Key
709	Fan	951	Wave washer
710	Fan cover	970	Dust cover
711	Terminal box cover		

Product Parameters

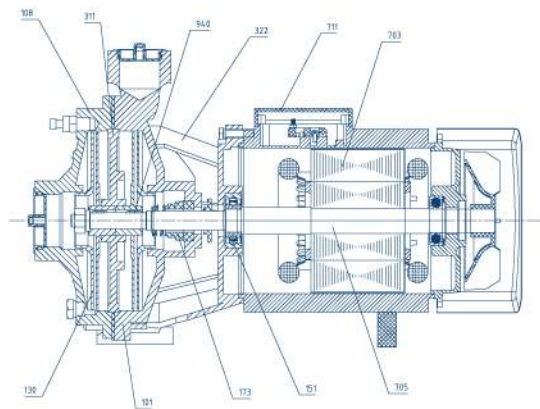

POS.	COMPONENT	CONSTRUCTION CHARACTERISTICS
101	PUMP BODY	Cast iron
108	PUMP COVER	Cast iron
130	IMPELLER	Double impeller, brass
151	BEARING	Deep groove ball bearings
173	MECHANICAL SEAL	Ceramic/Graphite/Nitrile rubber
311	BAFFLE	Cast iron
322	COUPLING	Cast iron
703	STATOR CORE	Stator core with winding
705	ROTOR	Stainless steel
940	KEY	Stainless steel

Product Dimensions

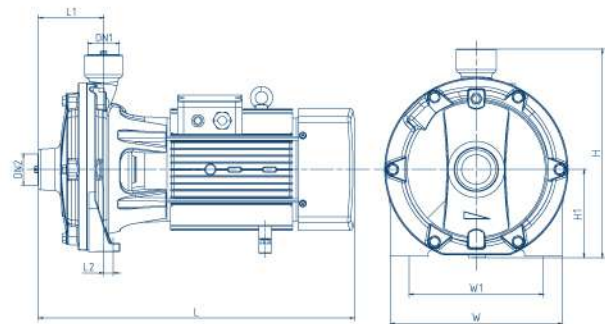

Model	DN1	DN2	Dimension(mm)						
			L	W	H	L1	L2	W1	H1
2CP40/200B	1.5"	2"	615	304	355	119	11	215	150
2CP40/200A	1.5"	2"	615	304	355	119	11	215	150
2CP50/200B	2"	2"	615	304	355	119	11	215	150
2CP50/200A	2"	2"	615	304	355	119	11	215	150
2CP40/250D	1.5"	2"	740	357	407	124	17	270	170
2CP40/250C	1.5"	2"	740	357	407	124	17	270	170
2CP40/250B	1.5"	2"	740	357	407	124	17	270	170
2CP40/250A	1.5"	2"	740	357	407	124	17	270	170
2CP50/250D	2"	2"	740	357	407	124	17	270	170
2CP50/250C	2"	2"	740	357	407	124	17	270	170
2CP50/250B	2"	2"	740	357	407	124	17	270	170
2CP50/250A	2"	2"	740	357	407	124	17	270	170

GHFM

Centrifugal Pump

Capacity up to 500 L/min(30 m³/h)

Head up to 20 m

Application Limits

Manometric suction lift up to 7 m

Liquid temperature +40°C

Ambient temperature up to +40°C




Installation & Use

The GHFm series, from the points of view of both performance and mechanical dimensions, has been expressly designed for use in the civil, agricultural and industrial field. Due to the high yields reached and the possibility of continuous duty, it is recommended to use for irrigation with following and sprinkling water, drawing water from lakes, rivers, wells and etc. The pumps should be installed in enclosed environment, or at least sheltered from inclement weather.

Construction


Pump Body: Cast iron
Impeller: Brass with centrifugal radial flow type.
Motor Shaft: 304 stainless steel shaft.
Mechanical Seal: Ceramic - graphite.
Electric Motor: GHFm: Single-phase 220-240V/50Hz with condenser and thermal overload protector built into the copper winding. GHF: three-phase 380/400V-50Hz.
Insulation: Class F.
Protection: IP 44.

Performance

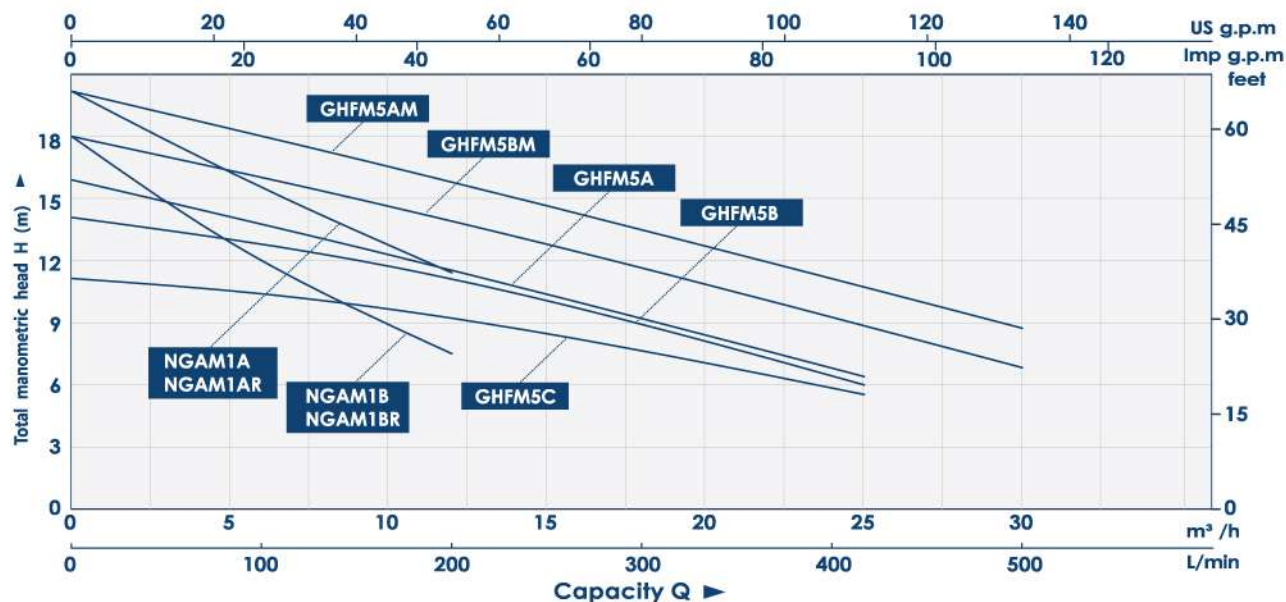


Model	Power		Current	Size	Q(m³/h)	0	3	6	9	12	15	18	21	24	26	30	
	KW	HP	A	Inch	Q(L/min)	0	50	100	150	200	250	300	350	400	433	500	
NGAm1B	0.55	0.75	3.9	1½"×1½"	H(m)	18	13.4	11.9	9.9	7.5	-	-	-	-	-	-	
NGAm1A	0.75	1	5.1	1½"×1½"		20	17.8	15.7	14	11.2	-	-	-	-	-	-	-
NGAm1BR	0.55	0.75	3.9	1 ¼"×1 ¼"		18	13.4	11.9	9.9	7.5	-	-	-	-	-	-	-
NGAm1AR	0.75	1	5.1	1 ¼"×1 ¼"		20	17.8	15.7	14	11.2	-	-	-	-	-	-	-
GHFm5C	0.55	0.75	3.9	2"×2"		11	10.5	10.4	10.2	10	9.3	8.3	7.2	5.8	-	-	-
GHFm5B	0.75	1	5.1	2"×2"		14	12.6	12.4	12.1	11.5	10.6	9.1	8	6.6	-	-	-
GHFm5A	1.1	1.5	5.2	2"×2"		16	14.2	12.8	12.7	12.1	11.1	9.5	8.4	7	-	-	-
GHFm5BM	1.1	1.5	7	2"×2"		18	16.7	15	14.9	14.5	13.9	13	11.6	9.8	8.6	7.1	-
GHFm5AM	1.5	2	9.4	2"×2"		20	18.4	17	16.9	16.4	15.8	14.5	13.1	11.2	10.1	8.7	-

Diagram

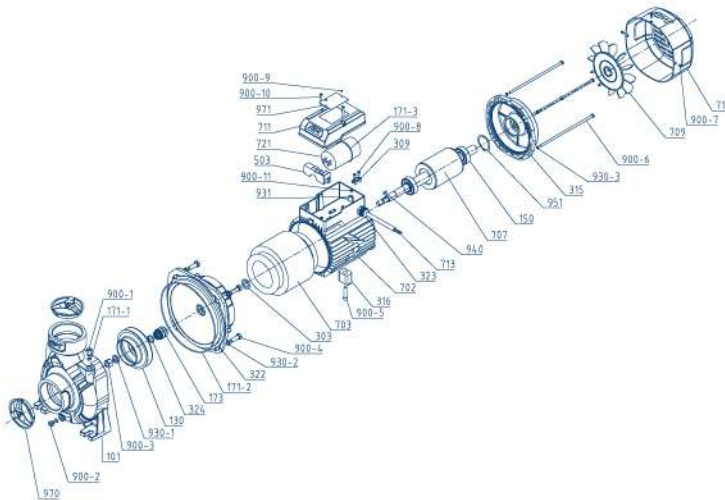


101	Pump body	721	Run capacitor
130	Impeller	900-1	Water-filled screw
150	Bearing	900-2	Water-filled screw
171-1	O ring	900-3	Slotted hexagon nut
171-2	O ring	900-4	Hexagon headed bolt
171-3	O ring	900-5	Hexagon socket head cap screw
173	Mechanical seal	900-6	Hexagon headed bolt
303	Water retaining ring	900-7	Phillips pan head screw
309	Cable pressing plate	900-8	Phillips pan head screw
315	End cover	900-9	Nameplate rivet
316	Foot	900-10	Phillips pan head screw
322	Coupling	900-11	Phillips pan head screw
323	Cable gland	930-1	Spring washer
324	Circlip	930-2	Spring washer
503	Terminal Block	930-3	Spring washer
702	Barrel	931	External tooth lock washer
703	Stator core with winding	940	Key
707	Cast aluminum rotor	951	Wave washer
709	Fan	970	Dust cover
710	Fan cover	971	Nameplate
711	Terminal box cover		
713	Cable		

Product Parameters

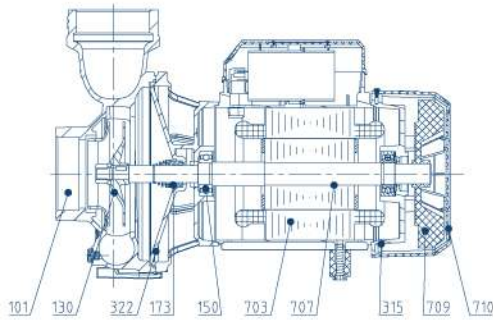

POS.	COMPONENT	CONSTRUCTION CHARACTERISTICS
101	PUMP BODY	Cast iron
130	IMPELLER	Brass
150	BEARING	Deep groove ball bearings
173	MECHANICAL SEAL	Ceramic - Graphite
315	END COVER	Aluminum
322	COUPLING	Aluminum
703	STATOR CORE WITH WINDING	Steel strip stator / cold rolled stator
707	ROTOR	Cast aluminium rotor
709	FAN	Plastic
710	FAN COVER	Plastic

Product Dimensions

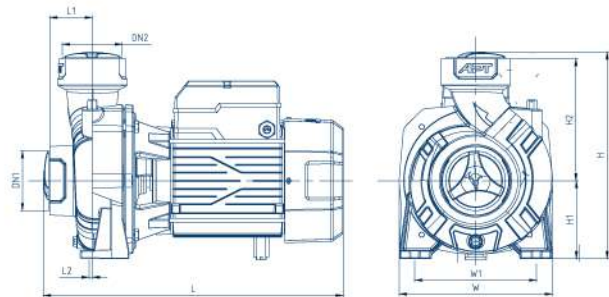

Model	DN1	DN2	Dimension(mm)							
			L	W	H	H1	H2	L1	L2	W1
NGAm1B	1½"	1½"	312.5	192	237	99	136	40	45	155
NGAm1A	1½"	1½"	312.5	192	237	99	136	40	45	155
NGAm1BR	1¼"	1¼"	312.5	192	237	99	136	40	45	155
NGAm1AR	1¼"	1¼"	312.5	192	237	99	136	40	45	155
GHFm5C	2"	2"	340.6	192	242	99	134	49	15	152
GHFm5B	2"	2"	340.6	192	242	99	134	49	15	152
GHFm5A	2"	2"	340.6	192	242	99	134	49	15	152
GHFm5BM	2"	2"	394.5	206.5	269	112	150	57.5	5.2	155.5
GHFm5AM	2"	2"	394.5	206.5	269	112	150	57.5	5.2	155.5

GHFM

Centrifugal Pump

Capacity up to 1250 L/min(75m³/h)

Head up to 20 m

Application Limits

Manometric suction lift up to 7 m

Liquid temperature+40°C

Ambient temperature up to+40°C



Installation & Use

The GHFm series, from the points of view of both performance and mechanical dimensions, has been expressly designed for use in the civil, agricultural and industrial eld. Due to the high yields reached and the possibility of continuous duty, it is recommended to use for irrigation with following and sprinkling water, drawing water from lakes, rivers, wells and etc. The pumps should be installed in enclosed enviroment, or at least sheltered from inclement weather.

Construction

Pump Body: Cast iron

Impeller: Brass with centrifugal radial flow type.

Motor Shaft: 304 stainless steel shaft.


Mechanical Seal: Ceramic - graphite.

Electric Motor: GHFm:Single-phase 220-240V/50Hz with condenser and thermal overload protector built into the copper winding.GHF:three-phase 380/400V-50Hz.

Insulation: Class F.

Protection: IP 44.


Performance

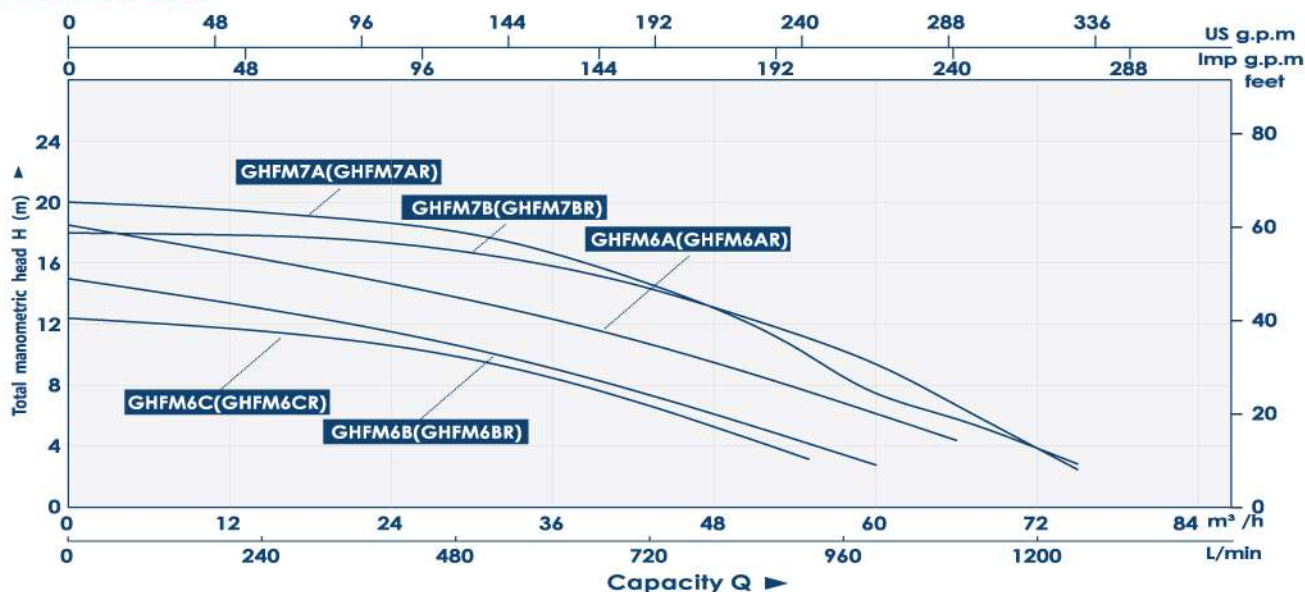

Model	Power		Current	Size	Q(m ³ /h)	Capacity Q (L/min)									
	KW	HP				0	12	18	30	42	48	54	60	66	72
GHFm6C	1.1	1.5	7	3"x3"	H(m)	12.1	11.6	11.2	9.7	7.2	5.6	3.5	-	-	-
GHFm6B	1.5	2	9.4	3"x3"		15	13.8	12.6	10.4	7.7	6.1	4.4	2.8	-	-
GHFm6A	2.2	3	11.7	3"x3"		18.5	16.2	15	13.6	11	9	7.2	6.2	4.4	-
GHFm6CR	1.1	1.5	7	4"x4"		12.1	11.6	11.2	9.7	7.2	5.6	3.5	-	-	-
GHFm6BR	1.5	2	9.4	4"x4"		15	13.8	12.6	10.4	7.7	6.1	4.4	2.8	-	-
GHFm6AR	2.2	3	11.6	4"x4"		18.5	16.2	15	13.6	11	9	7.2	6.2	4.4	-
GHFm7B	3	4	12.6	3"x3"		18	17.9	17.8	16.7	14.7	13.1	11.4	9.4	6.7	3.9
GHFm7A	4	5.5	16.6	3"x3"		20	19.5	19.1	17.9	15	13	10.5	7.5	5.8	3.9
GHFm7BR	3	4	12.7	4"x4"		18	17.9	17.8	16.7	14.7	13.1	11.4	9.4	6.7	3.9
GHFm7AR	4	5.5	14.3	4"x4"		20	19.5	19.1	17.9	15	13	10.5	7.5	5.8	3.9


Centrifugal Pump

Diagram

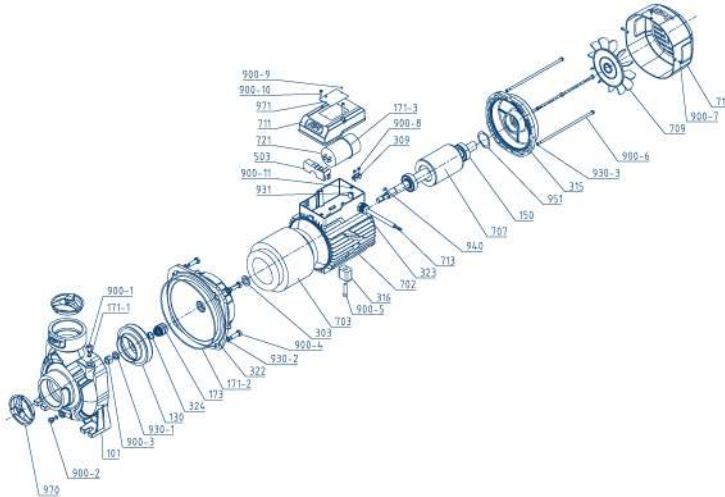


101	Pump body	721	Run capacitor
130	Impeller	900-1	Water-filled screw
150	Bearing	900-2	Water-filled screw
171-1	O ring	900-3	Slotted hexagon nut
171-2	O ring	900-4	Hexagon headed bolt
171-3	O ring	900-5	Hexagon socket head cap screw
173	Mechanical seal	900-6	Hexagon headed bolt
303	Water retaining ring	900-7	Phillips pan head screw
309	Cable pressing plate	900-8	Phillips pan head screw
315	End cover	900-9	Nameplate rivet
316	Foot	900-10	Phillips pan head screw
322	Coupling	900-11	Phillips pan head screw
323	Cable gland	930-1	Spring washer
324	Circlip	930-2	Spring washer
503	Terminal Block	930-3	Spring washer
702	Barrel	931	External tooth lock washer
703	Stator core with winding	940	Key
707	Rotor	951	Wave washer
709	Fan	970	Dust cover
710	Fan cover	971	Nameplate
711	Terminal box cover		
713	Cable		

Product Parameters

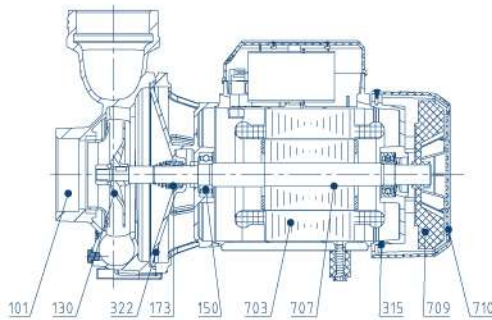

POS.	COMPONENT	CONSTRUCTION CHARACTERISTICS
101	PUMP BODY	Cast iron
130	IMPELLER	Brass
150	BEARING	Deep groove ball bearings
173	MECHANICAL SEAL	Ceramic - Graphite
315	END COVER	Aluminum
322	COUPLING	Aluminum
703	STATOR CORE WITH WINDING	Steel strip stator / cold rolled stator
707	ROTOR	
709	FAN	Plastic
710	FAN COVER	Plastic

Product Dimensions

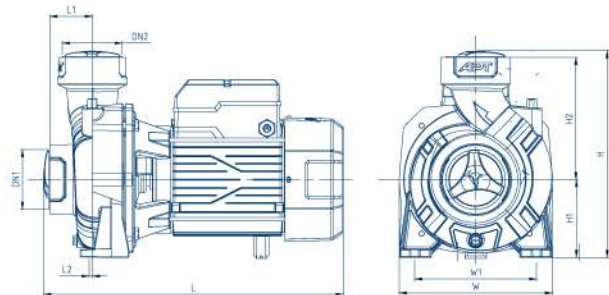

Model	DN1	DN2	Dimension(mm)							
			L	W	H	H1	H2	L1	L2	W1
GHFm6C	2"	2"	470.5	240.7	324.5	122.5	192	66.7	1	191
GHFm6B	2"	2"	470.5	240.7	324.5	122.5	192	66.7	1	191
GHFm6A	3"	3"	470.5	240.7	324.5	122.5	192	66.7	1	191
GHFm6CR	4"	4"	373	207	260	109.5	141	50	9.5	163
GHFm6BR	4"	4"	373	207	260	109.5	141	50	9.5	163
GHFm6AR	3"	3"	460	230	313	123.5	180	61	14	184
GHFm7B	3"	3"	460	230	313	123.5	180	61	14	184
GHFm7A	3"	3"	460	230	313	123.5	180	61	14	184
GHFm7BR	4"	4"	460	230	313	123.5	180	61	14	184
GHFm7AR	4"	4"	460	230	313	123.5	180	61	14	184

2-5CPm60S Centrifugal Pump

Capacity up to 70 L/min(4.2m³/h)

Head up to 50 m

Application Limits

Manometric suction lift up to 7 m

Liquid temperature +40°C

Ambient temperature up to +40°C




Installation & Use

They are recommended for pumping clean water without abrasive particles, and liquids that are chemically non aggressive for the materials of which the pump is made. As a result of their reliability and the fact that they are easy to use, these pumps are widely used in the domestic place and particular in distributing water in combination with small and medium autoclaves, for transferring liquids and for the irrigation of gardens and allotments. The pumps should be installed in enclosed environment, or at least sheltered from inclement weather.

Construction

Pump Body: Stainless steel.
Impeller: Stainless steel
Motor Shaft: Stainless steel shaft.
Mechanical Seal: Ceramic - graphite.
Electric Motor: 2-5CPm: Single-phase 220-240V/50Hz with condenser and thermal overload protector built into the copper winding. 3-5CP:- three-phase 380-415V/50Hz.
Insulation: Class F.
Protection: IP 44.


Performance

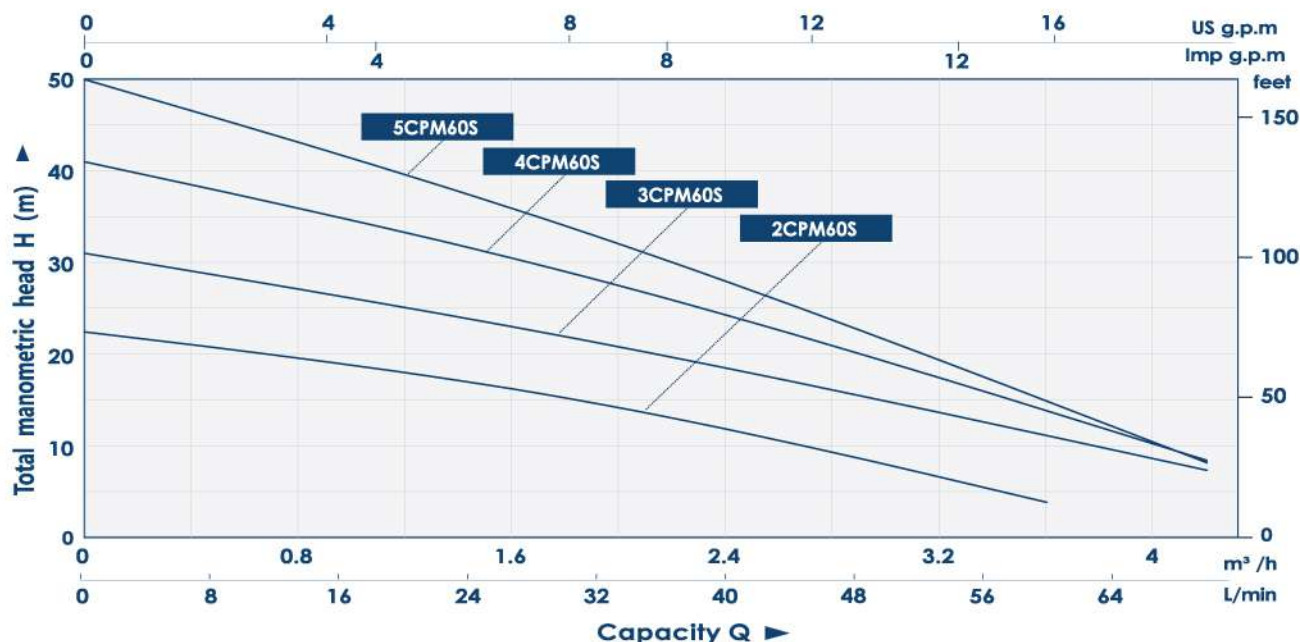

Model	Power		Current(A)		Size	Q(m³/h)	0	0.6	1.2	1.8	2.4	3	3.6	3.9
	KW	HP	1~	3~			0	10	20	30	40	50	60	65
2CPm60S	0.24	0.33	1.8	-	1"x1"	H(m)	22.4	20.3	17.8	15.2	12.7	9	3.8	-
3CP(m)60S	0.37	0.5	2.7	1	1"x1"		31	27.9	24.9	21.9	18.6	15.2	11.3	9.2
4CP(m)60S	0.55	0.75	3.9	1.3	1"x1"		41	37.1	33.1	29	24.7	19.8	14.2	11.1
5CP(m)60S	0.75	1	5.1	1.8	1"x1"		50	45	39.4	34	28.3	21.8	15.3	11.5


Centrifugal Pump

Diagram

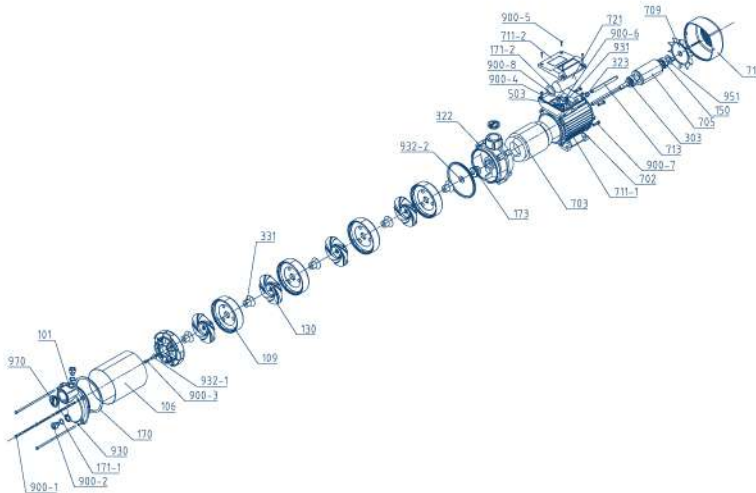



101	Pump body	721	Run capacitor
106	Pump casing	900-1	Hexagon headed bolt
109	Guide vane	900-2	Vent cock
130	Impeller	900-3	Hexagon headed bolt
150	Bearing	900-4	Phillips pan head screw
170	Gasket	900-5	Phillips pan head tapping screw
171-1	O ring	900-6	Phillips pan head screw
171-2	O ring	900-7	Phillips pan head screw
173	Mechanical seal	900-8	Phillips pan head screw
303	Water retaining ring	930	Spring washer
322	Coupling	931	External tooth lock washer
323	Cable gland	932-1	Flat washer
331	Impeller pressing sleeve	932-2	Flat washer
503	Terminal	951	Wave washer
702	Motor case	970	Dust cover
703	Stator core with winding		
705	Rotor		
709	Fan		
710	Fan cover		
711-1	Wiring box holder		
711-2	Terminal box cover		
713	Cable		

Product Parameters

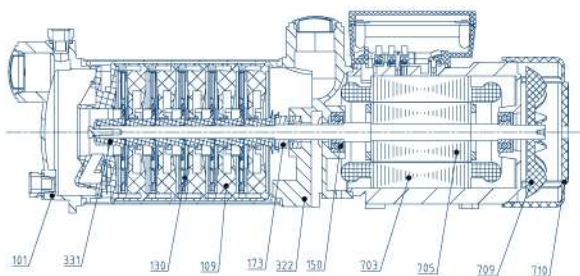

POS.	COMPONENT	CONSTRUCTION CHARACTERISTICS
101	PUMP BODY	Cast iron
109	GUIDE VANE	PPO
130	IMPELLER	Stainless steel
150	BEARING	6201-2RZ
173	MECHANICAL SEAL	Ceramic-Graphite
322	COUPLING	Cast iron
331	IMPELLER PRESSURE SEELVE	Plastic ABS
703	STATOR CORE	Stator core with winding
705	ROTOR	Cast aluminum rator
709	FAN	Pilastic PP
710	FAN COVER	Plastic ABS

Product Dimensions

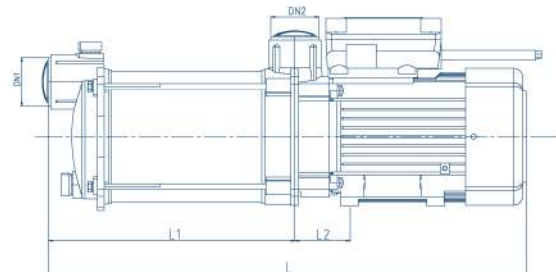

Model	DN1	DN2	Dimension(mm)							
			L	W	H	L1	L2	W1	H1	H2
2CPm60S	1"	1"	370	125	168	167.5	48.5	119	109	39.5
3CP(m)60S	1"	1"	394	125	168	191.5	48.5	119	109	39.5
4CP(m)60S	1"	1"	418	125	168	215.5	48.5	119	109	39.5
5CP(m)60S	1"	1"	442	125	168	239.5	48.5	119	109	39.5

1-5CPm100S Centrifugal Pump

Capacity up to 100 L/min(6 m³/h)

Head up to 50 m

Application Limits

Manometric suction lift up to 7 m

Liquid temperature +40°C

Ambient temperature up to +40°C




Installation & Use

They are recommended for pumping clean water without abrasive particles, and liquids that are chemically non aggressive for the materials of which the pump is made. As a result of their reliability and the fact that they are easy to use, these pumps are widely used in the domestic place and particular in distributing water in combination with small and medium autoclaves, for transferring liquids and for the irrigation of gardens and allotments. The pumps should be installed in enclosed environment, or at least sheltered from inclement weather.

Construction


Pump Body: Stainless steel.
Impeller: PPO
Motor Shaft: Stainless steel shaft.
Mechanical Seal: Ceramic - graphite.
Electric Motor: 2-5CPm: Single-phase
220-240V/50Hz with condenser and thermal overload protector built into the copper winding.
Insulation: Class F.
Protection: IP 44.

Performance

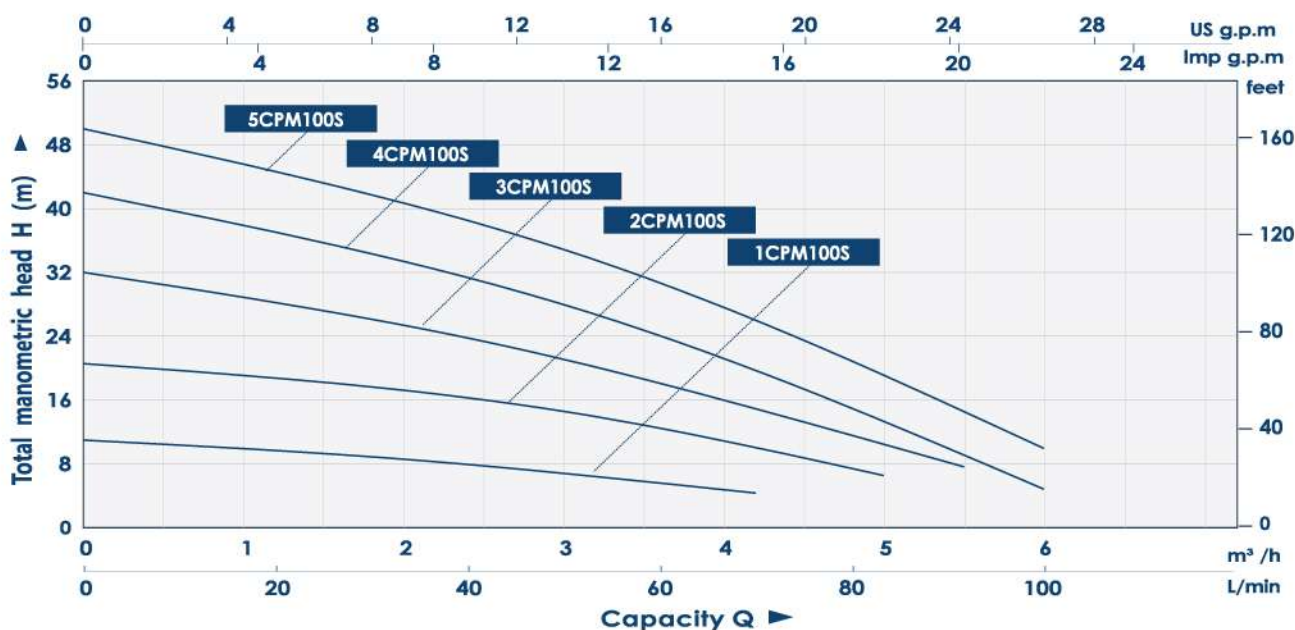


Model	Power		Current	Size	Q(m³/h)	0	0.5	1	1.5	2	2.5	3	3.5	4	4.5	5	6
	KW	HP				A	Inch	Q(L/min)	0	8.3	16.7	25	33.3	41.7	50	58.3	66.7
1CPm100S	0.25	0.34	1.9	1"x1"	H(m)	11	10.4	9.8	9.3	8.6	7.8	7	6	4.8	-	-	-
2CPm100S	0.37	0.5	2.7	1"x1"		20.6	19.9	19.2	18.2	17	15.8	14.3	12.7	10.8	8.6	6.6	-
3CPm100S	0.6	0.8	4.2	1"x1"		32	30.4	28.8	27.1	25.4	23.4	21.5	19.1	16.6	13.6	10.5	-
4CPm100S	0.75	1	5.1	1"x1"		42	39.7	37.9	35.9	33.2	30.5	28	25.2	21.6	17.6	13.5	4.9
5CPm100S	0.9	1.2	6.2	1"x1"		50	48.4	46	43.5	41.1	38.1	34.9	31.2	26.8	22.3	17.3	10

Diagram

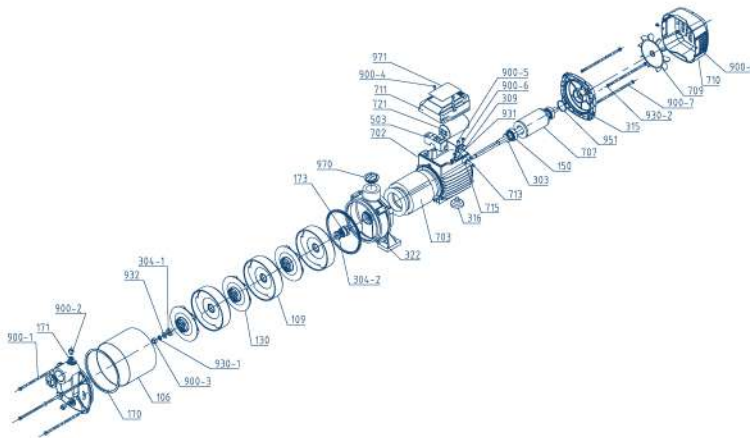



106	Pump casing	715	Cable sheath
109	Guide vane	721	Run capacitor
130	Impeller	900-1	Hexagon headed bolt
150	Bearing	900-2	Slotted Cylinder Head Screw
170	Gasket	900-3	Slotted hexagon nut
171	O ring	900-4	Phillips pan head screw
173	Mechanical seal	900-5	Phillips pan head screw
303	Water retaining ring	900-6	Screw
304-1	Shaft sleeve	900-7	Hexagon headed bolt
304-2	Shaft sleeve	900-8	Phillips pan head screw
309	Cable pressing plate	930-1	Spring washer
315	End cover	930-2	Spring washer
316	Foot	931	External tooth lock washer
322	Coupling	932	Flat washer
503	Terminal Block	951	Wave washer
702	Motor case	970	Dust cover
703	Stator core with winding	971	Nameplate
707	Cast aluminum rotor		
709	Fan		
710	Fan cover		
711	Terminal box		
713	Cable		

Product Parameters

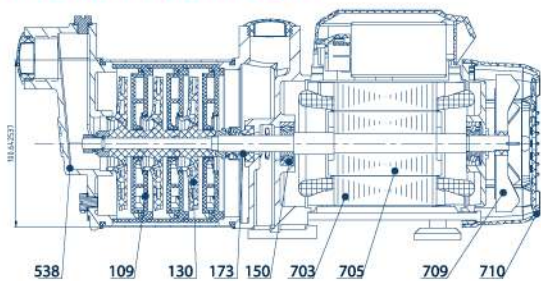

POS.	COMPONENT	CONSTRUCTION CHARACTERISTICS
109	GUIDE VANE	PPO
130	IMPELLER	PPO
150	BEARING	C & U
173	MECHANICAL SEAL	Ceramic-Graphite
538	WATER INLET JOINT	Cast iron
703	STATOR CORE	Stator core with winding
705	ROTOR	Cast aluminum rotor
709	FAN	Plastic
710	FAN COVER	Cast iron

Product Dimensions

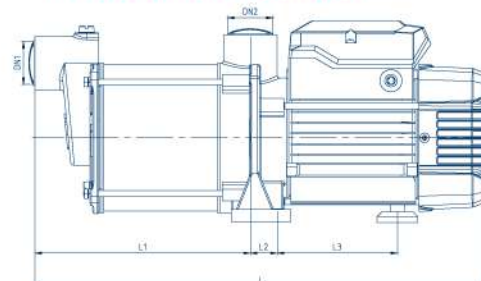

Model	DN1	DN2	Dimension(mm)								
			L	W	H	L1	L2	L3	W1	H1	H2
1CP(m)100S	1"	1"	326	148	167.8	128	24	99	115	132.5	23.5
2CP(m)100S	1"	1"	352	148	167.8	154	24	99	115	132.5	23.5
3CP(m)100S	1"	1"	378	148	167.8	180	24	99	115	132.5	23.5
4CP(m)100S	1"	1"	419	148	167.8	206	24	114	115	132.5	23.5
5CP(m)100S	1"	1"	445	148	167.8	232	24	114	115	132.5	23.5

2-8CPm120S Centrifugal Pump

Capacity up to 120 L/min(7.2 m³/h)

Head up to 100 m

Application Limits

Manometric suction lift up to 7 m

Liquid temperature +40°C

Ambient temperature up to +40°C




Installation & Use

They are recommended for pumping clean water without abrasive particles, and liquids that are chemically non aggressive for the materials of which the pump is made. As a result of their reliability and the fact that they are easy to use, these pumps are widely used in the domestic place and particular in distributing water in combination with small and medium autoclaves, for transferring liquids and for the irrigation of gardens and allotments. The pumps should be installed in enclosed environment, or at least sheltered from inclement weather.

Construction


Pump Body: Stainless steel.
Impeller: PPO
Motor Shaft: Stainless steel shaft.
Mechanical Seal: Ceramic - graphite.
Electric Motor: 2-5CPm: Single-phase
220-240V/50Hz with condenser and thermal overload protector built into the copper winding.
Insulation: Class F.
Protection: IP 44.

Performance

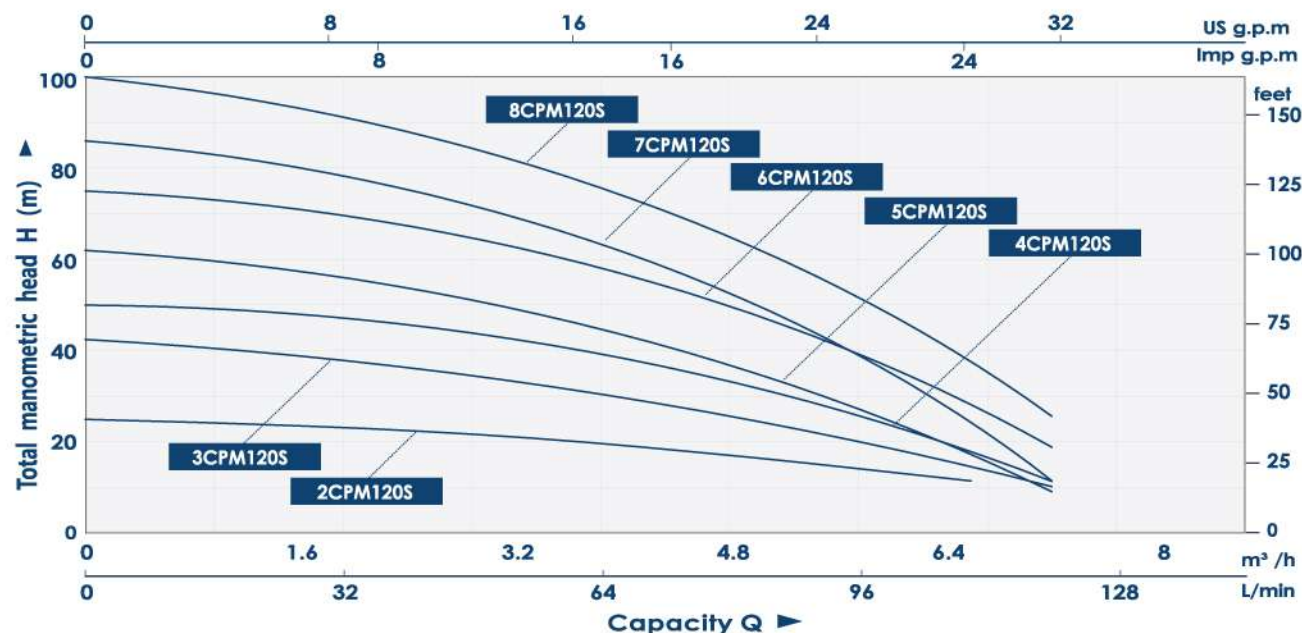


Model	Power		Current	Size	Q(m³/h)	0	0.5	1	1.5	2	2.5	3	3.5
	KW	HP				A	Inch	Q(L/min)	0	8.3	16.7	25	33.3
2CPm120S	0.55	0.75	4.7	1¼" x 1"	H(m)	25	24.5	23.6	22	19.8	16.3	14.1	11.5
3CPm120S	0.75	1	5.9	1¼" x 1"		42.5	38.3	37.5	34.1	29.9	24.8	19.3	14.6
4CPm120S	0.95	1.3	6.5	1¼" x 1"		50	48.8	46.7	43.4	37.5	31.2	23.7	17.9
5CPm120S	1.1	1.5	7	1¼" x 1"		62	60.5	57.4	50.4	42.5	35.7	25.3	17.3
6CPm120S	1.35	1.8	9.1	1¼" x 1"		75	73	70.4	64	57.3	44.9	36.8	28.2
7CPm120S	1.5	2	10	1¼" x 1"		86	83.5	80	70.9	56.5	47	33.3	24.3
8CPm120S	1.75	2.4	11.8	1¼" x 1"		100	94	89.8	83.4	73.8	61.5	47.3	37.6

Diagram

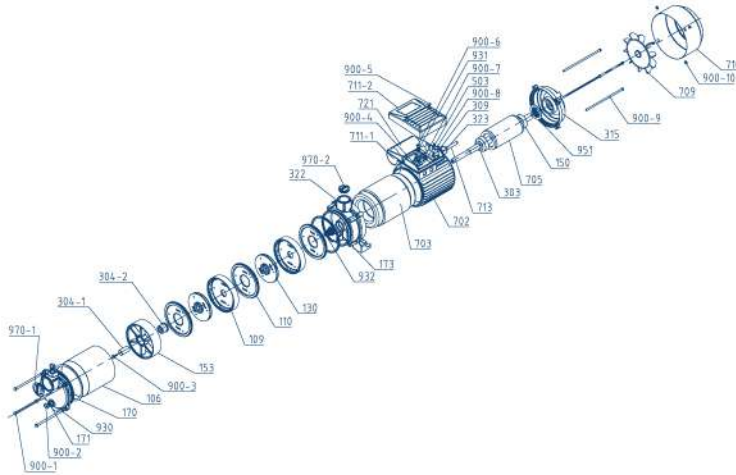



106	Pump casing	711-1	Wiring box holder
109	Guide vane	711-2	Terminal box cover
110	Guide vane cover	713	Cable
130	Impeller	721	Run capacitor
150	Bearing	900-1	Hexagon headed bolt
153	Bracket	900-2	Vent cock
170	Gasket	900-3	Hexagon headed bolt
171	O ring	900-4	Phillips pan head screw
173	Mechanical seal	900-5	Phillips pan head tapping screw
303	Water retaining ring	900-6	Phillips pan head screw
304-1	Shaft sleeve	900-7	Slotted hexagon nut
304-2	Shaft sleeve	900-8	Phillips pan head tapping screw
309	Cable pressing plate	900-9	Hexagon headed bolt
315	End cover	900-10	Phillips pan head screw
322	Coupling	930	Spring washer
323	Cable gland	931	External tooth lock washer
503	Terminal	932	Flat washer
702	Motor case	951	Wave washer
703	Stator core with winding	970-1	Dust cover
705	Rotor	970-2	Dust cover
709	Fan		
710	Fan cover		

Product Parameters

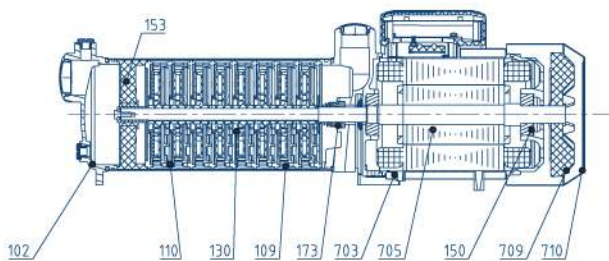

POS.	COMPONENT	CONSTRUCTION CHARACTERISTICS
102	CASING	Cast iron
109	GUIDE VANE	PPO
110	GUIDE VANE COVER	PPO
130	IMPELLER	PPO
150	BEARING	C & U
153	BRACKET	Cast iron
173	MECHANICAL SEAL	Ceramic-Graphite
703	STATOR CORE	Stator core with winding
705	ROTOR	Cast aluminum rator
709	FAN	Pllastic
710	FAN COVER	Stainless steel

Product Dimensions

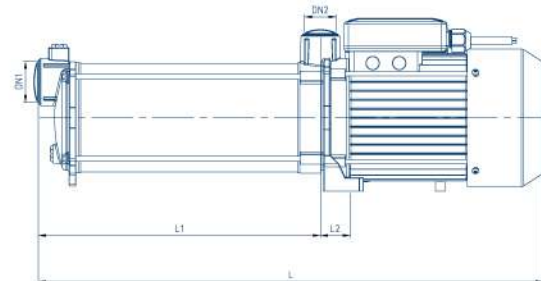

Model	DN1	DN2	Dimension(mm)							
			L	W	H	L1	L2	W1	H1	H2
2CP(m)120S	1.25"	1"	447	180	202.5	186	39.5	150	128	56
3CP(m)120S	1.25"	1"	471	180	202.5	210	39.5	150	128	56
4CP(m)120S	1.25"	1"	495	180	202.5	234	39.5	150	128	56
5CP(m)120S	1.25"	1"	519	180	202.5	258	39.5	150	128	56
6CP(m)120S	1.25"	1"	543	180	202.5	282	39.5	150	128	56
7CP(m)120S	1.25"	1"	567	180	202.5	306	39.5	150	128	56
8CP(m)120S	1.25"	1"	591	180	202.5	330	39.5	150	128	56

PW

Self-priming Pump

Capacity up to 57 L/min(3.4 m³/h)

Head up to 50 m

Application Limits

Manometric suction lift up to 8 m
Liquid temperature up to +90°C
Ambient temperature up to +40°C
Max pressure up to 5 bar




Installation & Use

They are recommended for pumping clean water without abrasive particles, and liquids that are chemically non aggressive for the materials of which the pump is made. As a result of their reliability, compact, economy and the fact that they are easy to use, they are widely used in domestic water, automatic boosting, water tower supply, well water lifting, solar hot water boosting. The pump also have a simple pressure switch control automatically. The pumps should be installed in enclosed enviroment, or at least sheltered from inclement weather.

Construction

Pump Body: Cast iron.
Impeller: Brass.
Motor Shaft: Stainless steel shaft.
Motor: Single phase.
Insulation: Class F.
Protection: IP 44.


Performance

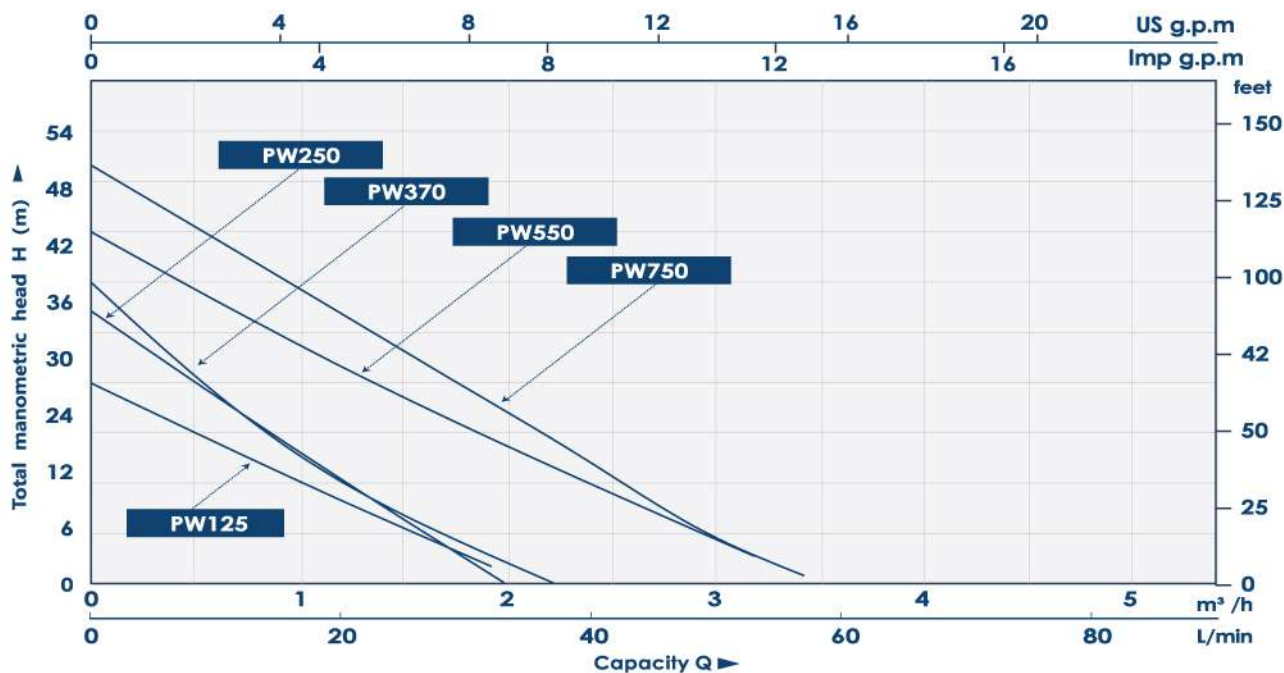

Model	Power		Current	Size	Q(m ³ /h)	0	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4	3
	KW	HP				Q(L/min)	5	10	15	20	25	30	35	40	50
PW125	0.125	0.17	1	1"x1"	H(m)	24	22	16.6	12.3	10	6.1	3.5	-	-	-
PW250	0.25	0.34	1.9	1"x1"		32.7	27.7	23.9	17.4	12.4	7.5	3.1	-	-	-
PW370	0.37	0.5	2.7	1"x1"		36	29.9	23.2	17.7	12.3	8.2	3.7	1.5	-	-
PW550	0.55	0.75	3.9	1"x1"		42	36	32.4	29.7	26	22.4	19.4	16.4	13	5.4
PW750	0.75	1	5.1	1"x1"		50	46	42	37.5	32.3	28.2	23.4	19.3	14.7	5.6


Self-priming Pump

Diagram

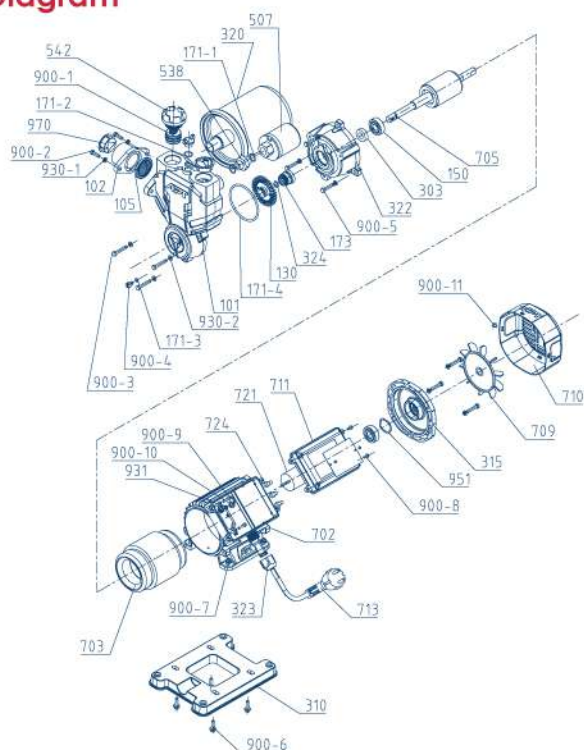


101	Pump body	724	Terminal cap
102	Water Inlet Joint	900-1	Vent cock
105	Filter	900-2	Hexagon headed bolt
130	Impeller	900-3	Hexagon headed bolt
150	Bearing	900-4	Slotted Cylinder Head Screw
171-1	O ring	900-5	Hexagon headed bolt
171-2	O ring	900-6	Hexagon flange bolt
171-3	O ring	900-7	Hexagonal flange nut
171-4	O ring	900-8	Phillips pan head tapping screw
173	Mechanical seal	900-9	Phillips pan head screw
303	Water retaining ring	900-10	Phillips pan head screw
310	Base plate	900-11	Phillips pan head screw
315	End cover	930-1	Spring washer
320	Pressure tank	930-2	Spring washer
322	Coupling	931	External tooth lock washer
323	Cable gland	951	Wave washer
324	Circlip	970	Dust cover
507	Pressure switch		
538	Joint		
542	Check valve		
702	Pump casing		
703	Stator core with winding		
705	Rotor		
709	Fan		
710	Fan cover		
711	Terminal box		
713	Cable		
721	Run capacitor		

Product Parameters

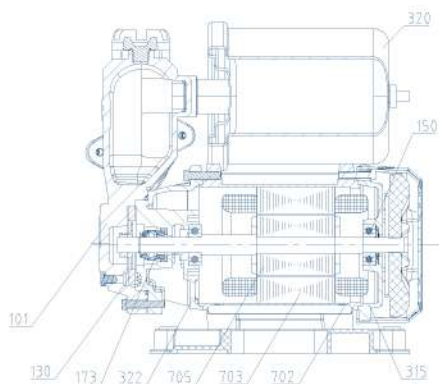


POS.	COMPONENT	CONSTRUCTION CHARACTERISTICS
101	PUMP BODY	Cast iron
130	IMPELLER	Brass
150	BEARING	Deep groove ball bearings
173	MECHANICAL SEAL	Ceramic- graphite
315	END COVER	Cast iron
320	PRESSURE TANK	PRESSURE TANK
322	COUPLING	Cast iron
702	PUMP CASING	Aluminium
703	STATOR	Stator core with winding
705	ROTOR	

Product Dimensions

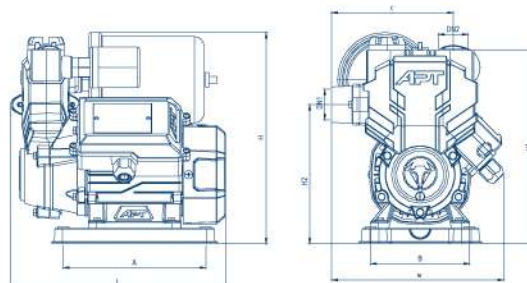

Model	Dimension(mm)								DN1	DN2
	L	W	H	H1	H2	A	B	C		
PW125	261	210	257	235	170	173	120	148	1"	1"
PW250	261	210	257	235	170	173	120	148	1"	1"
PW370	261	210	257	235	170	173	120	148	1"	1"

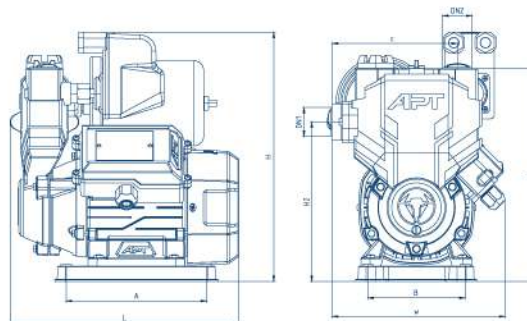

Model	Dimension(mm)								DN1	DN2
	L	W	H	H1	H2	A	B	C		
PW550	277	213	307.5	263	197	173	120	154	1"	1"
PW750	277	213	307.5	263	197	173	120	154	1"	1"

GEB

Circulation pump

Capacity up to 175 L/min(10.5 m³/h)

Head up to 12 m

Constant speed mode - three speed
 Constant pressure mode
 Proportional pressure mode
 Automatic mode
 Low noise
 No leakage
 Energy efficiency: Class A
 Communication interface: optional with PWM control



Installation & Use

GEB25/32 are shielded pumps, used in single pipe system, double pipe system, floor heating water circulation system, etc., with PWM control optional, and with the advantages of high comfort, low noise, low energy consumption, etc.











Application Limits

Liquid temperature: +2°C~+110°C
 Maximum ambient temperature: +40°C
 Maximum system pressure: 10 bar
 Protection level: IP44
 Pumped liquid characteristics: clean, free from solids and mineral oils, non-toxic, chemically neutral, close to the characteristics of water.
 Installation: the motor shaft must be kept in horizontal direction
 PH: 6.5 to 8.5

Performance





Model	Rated voltage(V)	Power frequency	Input power	Max. Current	Max. Flow (m ³ /h)	Max. head (m)	Max. perssure	Port-to-port l. (mm)	G.W (kg)	N.W (kg)	Outer box L x W x H(mm)
GEB25-4-180(N)	1 x 230 V	50 / 60 Hz	9~60W	0.23A	6.2	4	10 bar	180	4	3.2	260×190×140
	1 x 115 V			0.77A							
GEB25-6-180(N)	1 x 230 V	50 / 60 Hz	9~105W	0.41A	7.5	6	10 bar	180	4	3.2	260×190×140
	1 x 115 V			1.35A							
GEB25-8-180(N)	1 x 230 V	50 / 60 Hz	9~150W	0.58A	8.5	8	10 bar	180	4	3.2	260×190×140
	1 x 115 V			1.89A							
GEB25-10-180(N)	1 x 230 V	50 / 60 Hz	9~200W	0.78A	9.4	10	10 bar	180	4	3.2	260×190×140
	1 x 115 V			2.52A							
GEB25-12-180(N)	1 x 230 V	50 / 60 Hz	9~220W	0.86A	9.7	12	10 bar	180	4	3.2	260×190×140
	1 x 115 V			2.77A							
GEB32-4-180(N)	1 x 230 V	50 / 60 Hz	9~78W	0.30 A	7.7	4	10 bar	180	4.4	3.3	260×190×140
	1 x 115 V			0.99 A							
GEB32-6-180(N)	1 x 230 V	50 / 60 Hz	9~120W	0.46A	9.1	6	10 bar	180	4.4	3.3	260×190×140
	1 x 115 V			1.53A							
GEB32-8-180(N)	1 x 230 V	50 / 60 Hz	9~168W	0.65A	10.1	8	10 bar	180	4.4	3.3	260×190×140
	1 x 115 V			2.13A							
GEB32-10-180(N)	1 x 230 V	50 / 60 Hz	9~200W	0.76A	10.5	10	10 bar	180	4.4	3.3	260×190×140
	1 x 115 V			2.51A							
GEB32-12-180(N)	1 x 230 V	50 / 60 Hz	9~220W	0.84A	9.7	12	10 bar	180	4.4	3.3	260×190×140
	1 x 115 V			2.76A							
GEB32-4-220F(N)	1 x 230 V	50 / 60 Hz	9~78W	0.30A	7.7	4	10 bar	220	7.3	6.9	235×150×232
	1 x 115 V			0.99 A							
GEB32-6-220F(N)	1 x 230 V	50 / 60 Hz	9~120W	0.46A	9.1	6	10 bar	220	7.3	6.9	235×150×232
	1 x 115 V			1.53A							
GEB32-8-220F(N)	1 x 230 V	50 / 60 Hz	9~168W	0.65A	10.1	8	10 bar	220	7.3	6.9	235×150×232
	1 x 115 V			2.13A							
GEB32-10-220F(N)	1 x 230 V	50 / 60 Hz	9~200W	0.79A	10.5	10	10 bar	220	7.3	6.9	235×150×232
	1 x 115 V			2.51A							

Performance

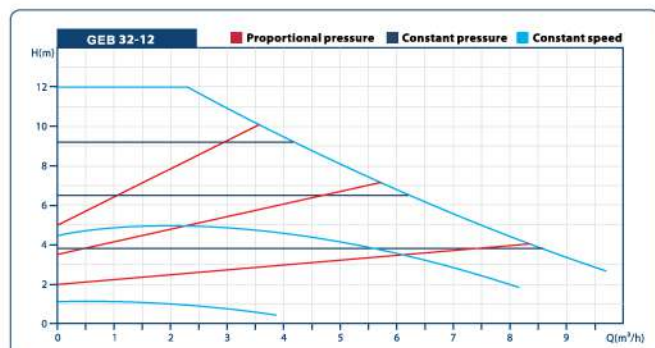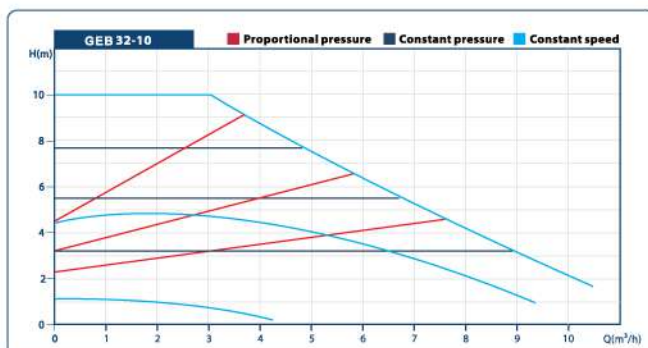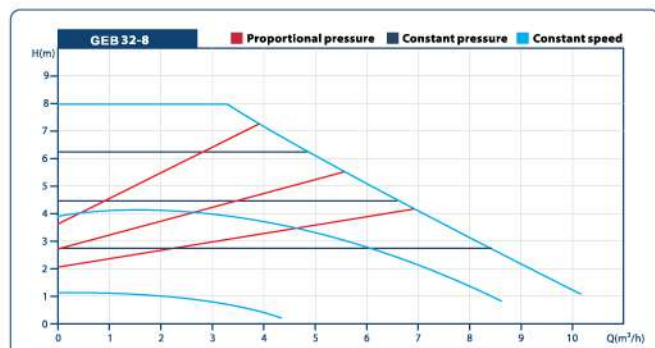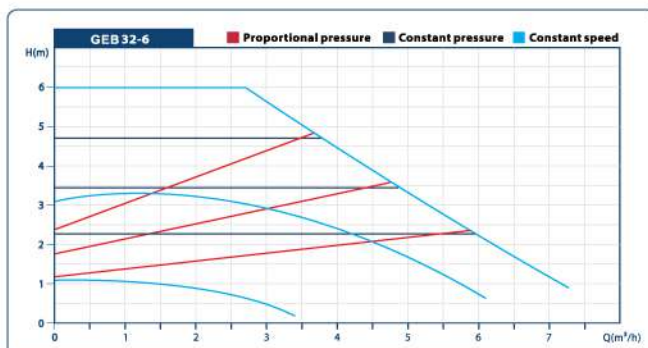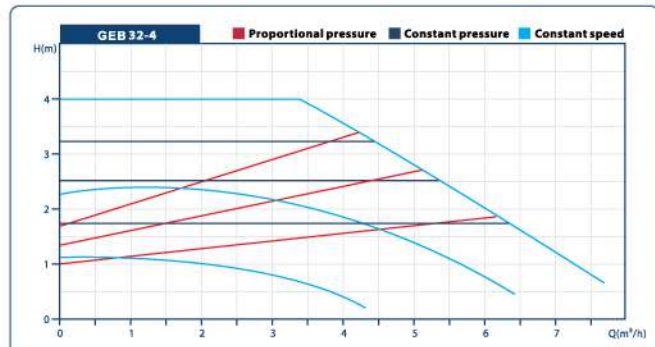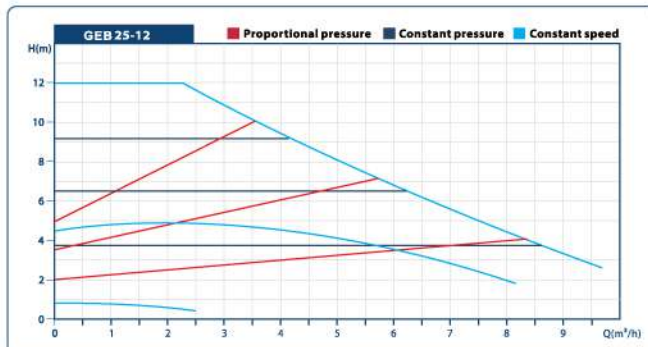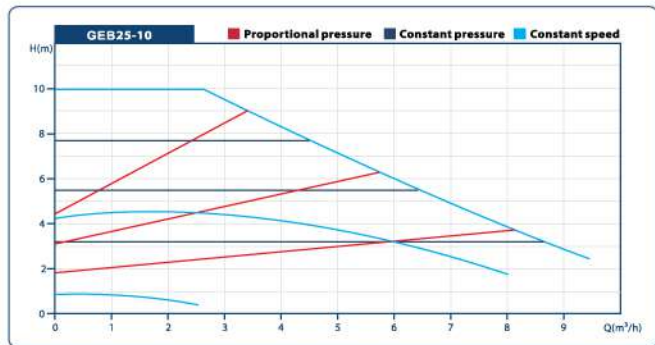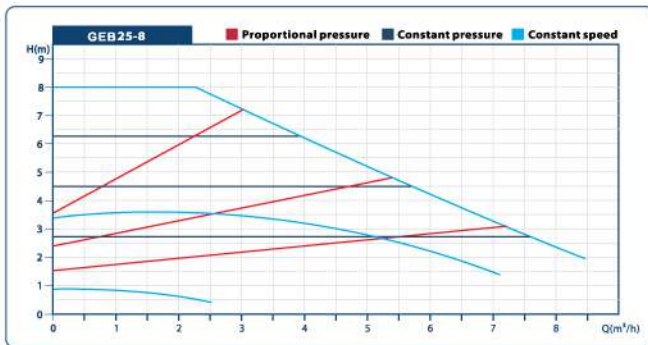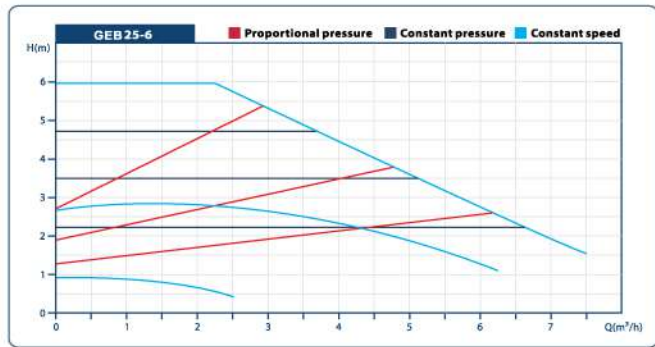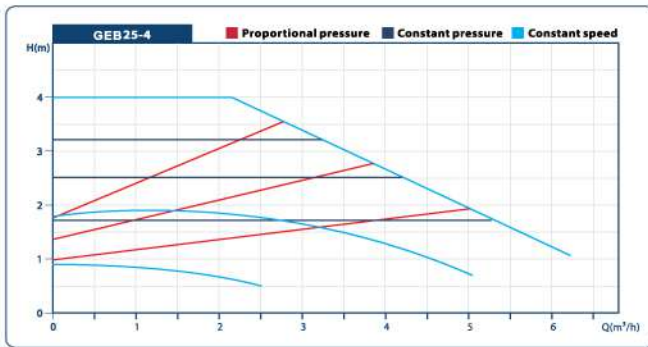


GEB
Circulation pump

Performance

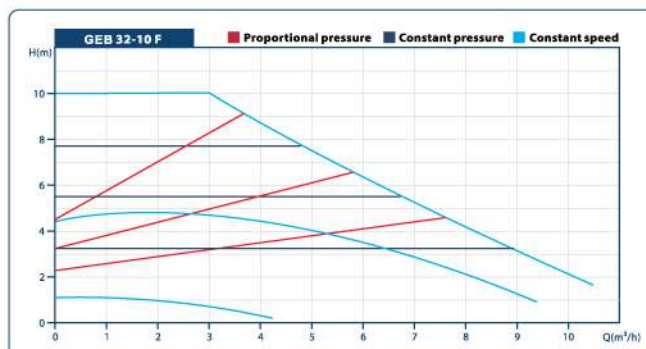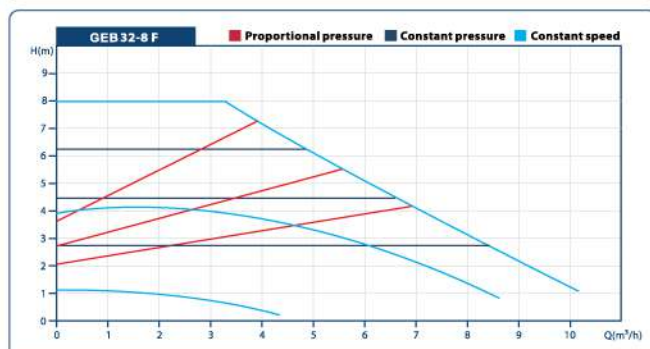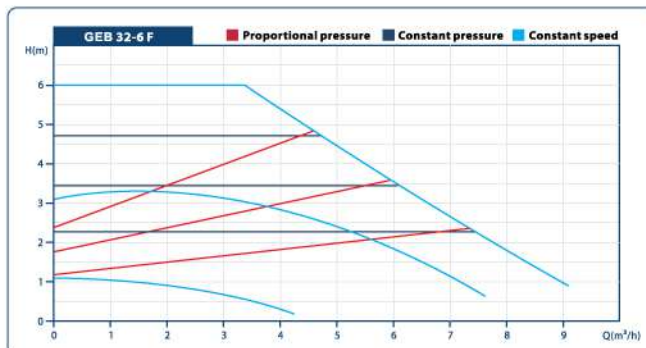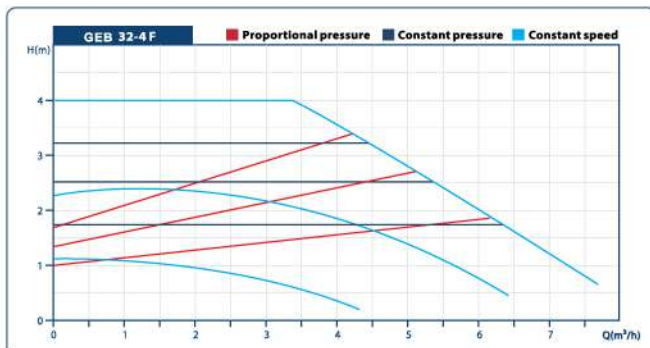


Diagram

- 170-1** O ring
- 170-2** Gasket
- 502** Control panel
- 711** Junction box with driver board
- 725** Motor rotor assembly with impeller
- 972** Thermal insulation foam



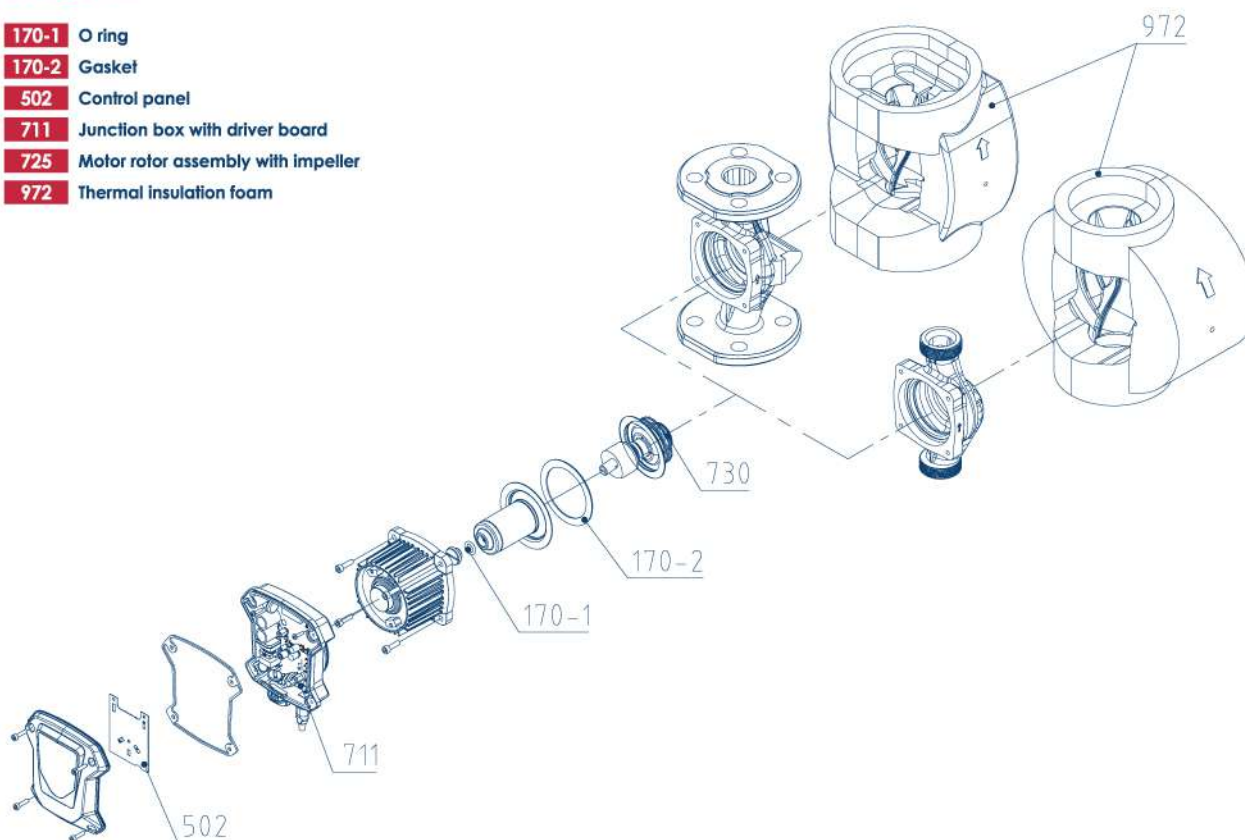


Product Parameters

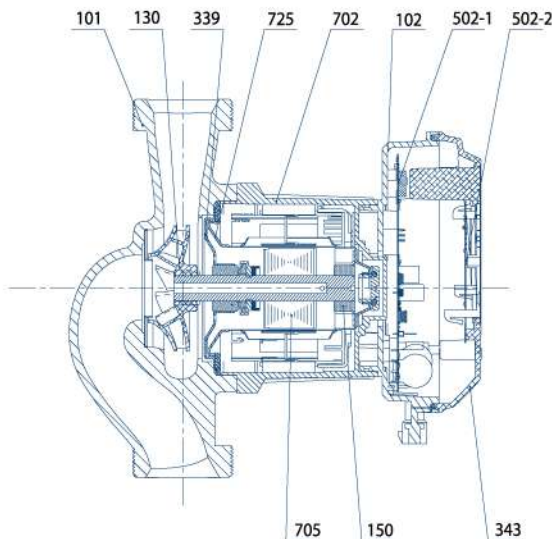

POS.	COMPONENT	CONSTRUCTION CHARACTERISTICS
101	PUMP BODY	Cast iron surface electrophoresis treatment, exterior painting treatment
102	CASING	Plastic spray outside
130	IMPELLER	Plastic spray outsideHydraulic model, equipped with PES engineering plastic impelleride
150	BEARING	Brown ceramic
339	STAINLESS STEEL COVER	Ceramic- graphite
343	MASK	Using high-strength plastic, surface skin texture treatment, secondary vulcanization treatment of sealant, beautiful and fashionable appearance
502-1	DRIVE BOARD	Electronic device
502-2	CONTROL PANEL	Electronic device
702	MOTOR CASE	Aluminum alloy barrel, the surface is treated with black electrophoresis.
705	ROTOR	Brown ceramic
725	SHIELD SLEEVE	Stainless steel material, the inner wall is mirror-finished

Product Dimensions

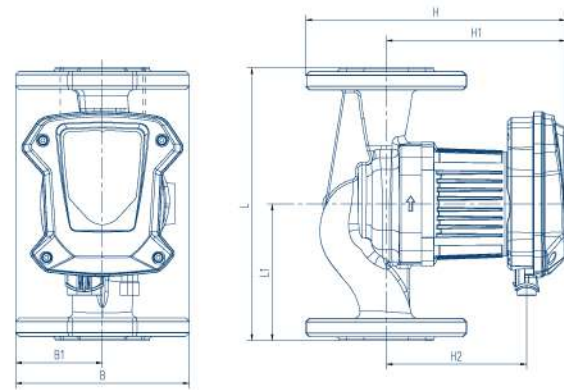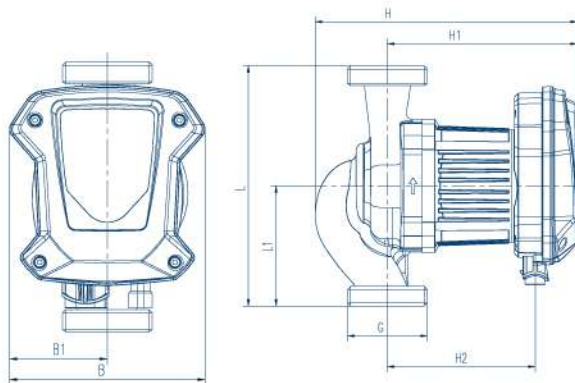

Model	Pump body material		Dimension(mm)							
	Cast iron	Stainless steel	L1	L2	B	B1	H	H1	H2	G
GEB25-4-180(N)	●	●	180	90	130	65	196	142	110.5	1.5"
GEB25-6-180(N)	●	●	180	90	130	65	196	142	110.5	1.5"
GEB25-8-180(N)	●	●	180	90	130	65	196	142	110.5	1.5"
GEB25-10-180(N)	●	●	180	90	130	65	196	142	110.5	1.5"
GEB25-12-180(N)	●	●	180	90	130	65	196	142	110.5	1.5"
GEB32-4-180(N)	●	●	180	90	130	65	196	142	110.5	2"
GEB32-6-180(N)	●	●	180	90	130	65	196	142	110.5	2"
GEB32-8-180(N)	●	●	180	90	130	65	196	142	110.5	2"
GEB32-10-180(N)	●	●	180	90	130	65	196	142	110.5	2"
GEB32-12-180(N)	●	●	180	90	130	65	196	142	110.5	2"

Model	Pump body material		Dimension(mm)												
	Cast iron	Stainless steel	L	L1	B	B1	H	H1	H2	D1	D2	D3	D4	D5	
GEB32-4-220F(N)	●	●	220	110	140	70	210	145	113	32	80	100	140	19	
GEB32-6-220F(N)	●	●	220	110	140	70	210	145	113	32	80	100	140	19	
GEB32-8-220F(N)	●	●	220	110	140	70	210	145	113	32	80	100	140	19	
GEB32-10-220F(N)	●	●	220	110	140	70	210	145	113	32	80	100	140	19	

UPS

Circulation pump

Capacity up to 160 L/min(9.6 m³/h)

Head up to 15 m

Canned moto
Low noise
No leakage



Installation & Use

UPS pumps are designed for circulation of liquids in heat-ing and air-conditioning systems. Pumps with brass or stainless steel housings are also suitable for using in hot-water service systems. Examples of typical applica-tions are mix water underfloor heating system, air energy hot water circulation system, solar hot water circulation system, etc.

Application Limits


Liquid temperature: +2°C~+110°C
Maximum ambient temperature: +40°C
Maximum system pressure: 10 bar
Protection level: IP44
Insulation class: F
Pumped liquid characteristics: clean, free from solids and mineral oil, non-toxic, chemically neutral, close to the characteristics of water.
Installation: the motor shaft must be kept in horizontal direction
PH: 6.5 to 8.5

Performance


Model	Voltage	Power	Material of pump body		Max.flow	Max.head	Current	Wight
	V/Hz	W	Cast iron	Brass	m³/h	m	A	kg
UPS15-4-130(U)	220V/50Hz	38/53/72	•	•	0.8/1.7/2.3	3/4/4.5	0.17/0.24/0.33	2.5
UPS15-5-130(U)	220V/50Hz	46/67/81	•	•	1.2/2.1/2.7	3/4/5	0.21/0.30/0.37	2.5
UPS15-6-130(U)	220V/50Hz	46/67/93	•	•	1.2/2.0/2.6	3/5/6	0.21/0.3/0.42	2.4
UPS20-4-130	220V/50Hz	38/53/72	•		0.8/1.7/2.3	3/4/4.5	0.17/0.24/0.33	2.4
UPS20-5-130	220V/50Hz	46/67/81	•		1.2/2.1/2.7	3/4/5	0.21/0.30/0.37	2.4
UPS20-6-130	220V/50Hz	46/67/93	•		1.3/2.3/3.3	3/5/6	0.21/0.30/0.42	2.6
UPS25-4-130(U)	220V/50Hz	38/53/72	•	•	1.3/2.1/2.9	3/4/4.5	0.17/0.24/0.33	2.5
UPS25-5-130(U)	220V/50Hz	46/67/81	•	•	1.2/2.4/3.1	3/4/5	0.21/0.30/0.37	2.8
UPS25-6-130(U)	220V/50Hz	46/67/93	•	•	1.3/2.3/3.3	3/5/6	0.21/0.3/0.42	2.8
UPS25-7-130(U)	220V/50Hz	66/95/122	•	•	2.4/3.5/4.3	4.5/6/6.5	0.31/0.44/0.56	2.7
UPS32-4-130	220V/50Hz	38/53/72	•		1.3/2.3/3.4	3/4/4.5	0.17/0.24/0.33	2.6
UPS32-5-130	220V/50Hz	46/67/81	•		1.4/2.5/3.8	3/4/5	0.21/0.30/0.37	2.8
UPS32-6-130	220V/50Hz	46/67/93	•		1.6/2.9/3.9	3/5/6	0.21/0.3/0.42	2.8
UPS25-4-180(U)	220V/50Hz	38/53/72	•	•	1.3/2.3/3.4	3/4/4.5	0.31/0.44/0.56	2.6
UPS25-5-180(U)	220V/50Hz	46/67/81	•	•	1.2/2.4/3.7	3/4/5	0.17/0.24/0.33	2.8
UPS25-6-180(U)	220V/50Hz	46/67/93	•	•	1.6/2.9/3.9	3/5/6	0.21/0.3/0.42	2.8
UPS25-7-180(U)	220V/50Hz	66/95/122	•	•	2.4/3.5/4.3	4.5/6/6.5	0.21/0.3/0.42	2.7
UPS32-4-180	220V/50Hz	38/53/72	•		1.3/2.3/3.4	3/4/4.5	0.17/0.24/0.33	2.6
UPS32-5-180	220V/50Hz	46/67/81	•		1.4/2.5/3.8	3/4/5	0.21/0.3/0.42	2.6
UPS32-6-180	220V/50Hz	46/67/93	•		1.6/2.9/3.9	3/5/6	0.21/0.3/0.42	3.2
UPS32-7-180	220V/50Hz	67/93/135	•		2.2/3.4/4.2	4.5/6.5/7	0.21/0.3/0.42	3.2
UPS25-8-180(U)	220V/50Hz	145/170/182	•	•	2.7/5.7/6.9	6.5/7.5/8	0.66/0.77/0.83	4.8
UPS32-8-180	220V/50Hz	150/210/270	•		2.5/6.2/9.6	6.5/7.5/8	0.68/0.96/1.23	5.2
UPS20-12-180(U)	220V/50Hz	145/220/245	•	•	1.3/1.9/3.1	7/11/12	0.66/1.0/1.11	4.4
UPS25-12-180	220V/50Hz	145/220/245	•		1.3/2.2/3.7	7/11/12	0.66/1.0/1.11	4.5
UPS25-15-180	220V/50Hz	150/210/270	•		1.7/2.8/4.1	10/13/15	0.68/0.96/1.23	5.1

Performance


UPS15-4

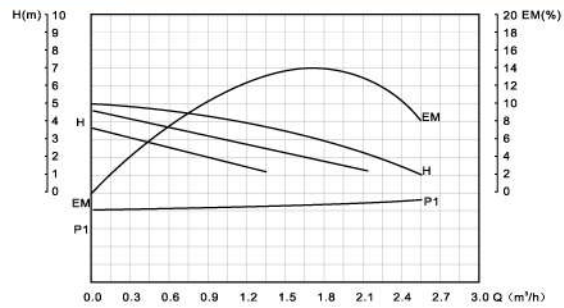

UPS20-4

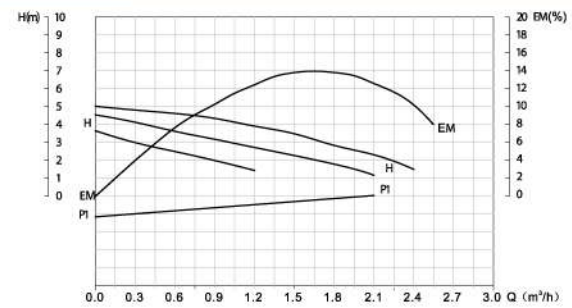


UPS25-4

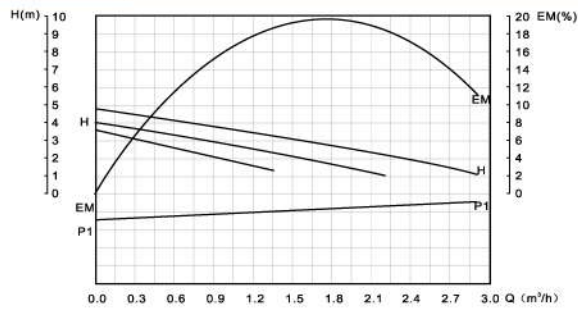


UPS32-4



UPS15-5

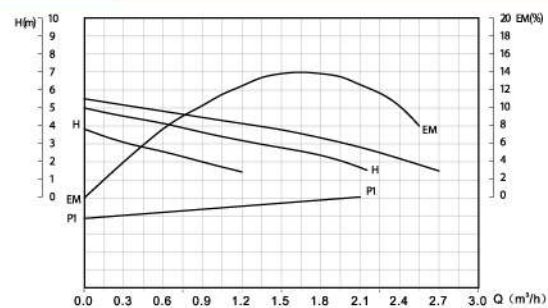


UPS20-5

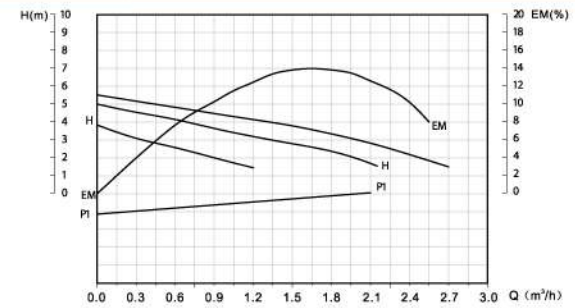

UPS25-5




UPS32-5

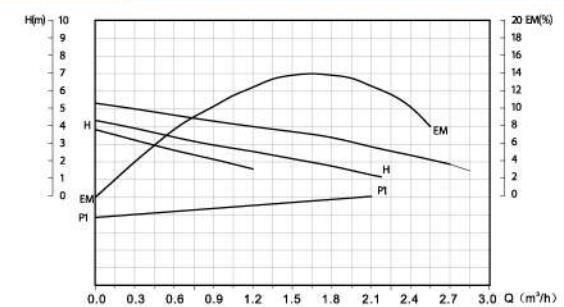

UPS15-6




UPS20-6

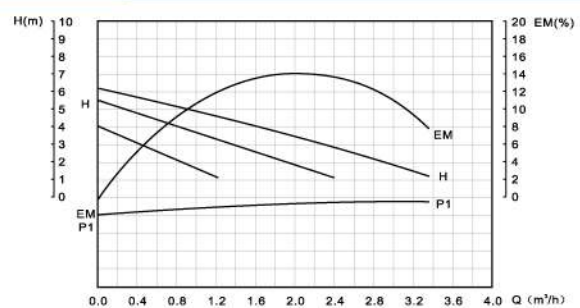


Performance


UPS25-6

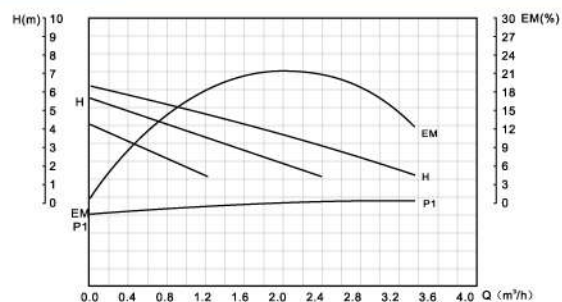


UPS32-6

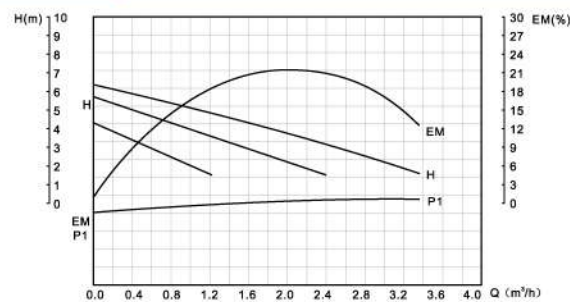


UPS25-7

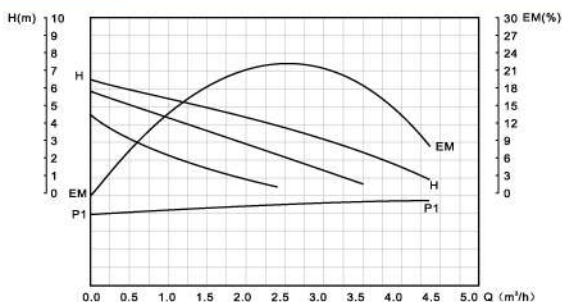


UPS32-7

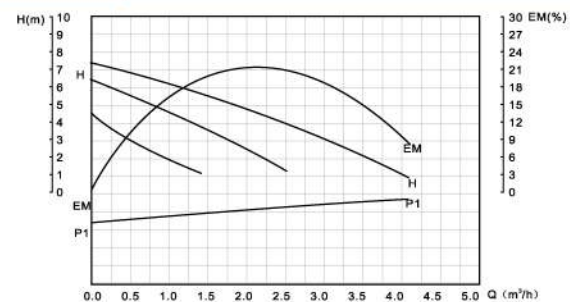


UPS25-8

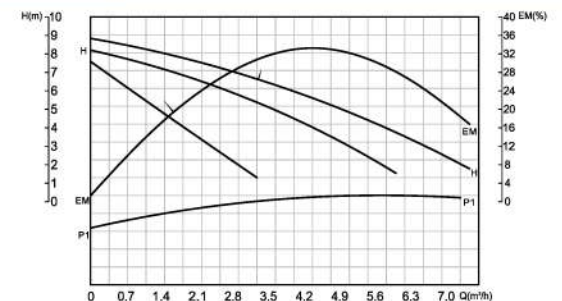


UPS32-8

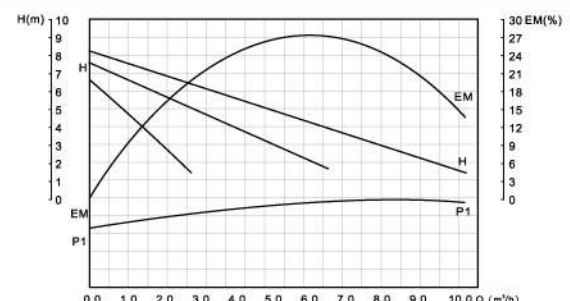


UPS20-12

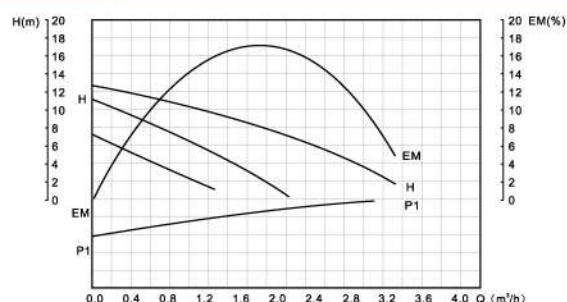


UPS25-12

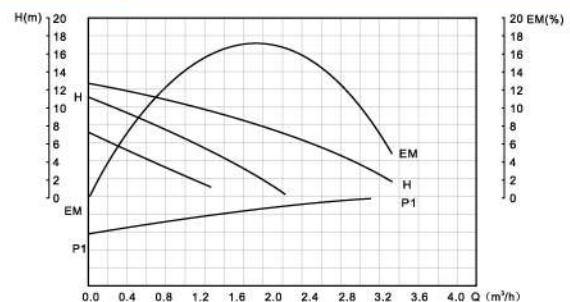

UPS25-15

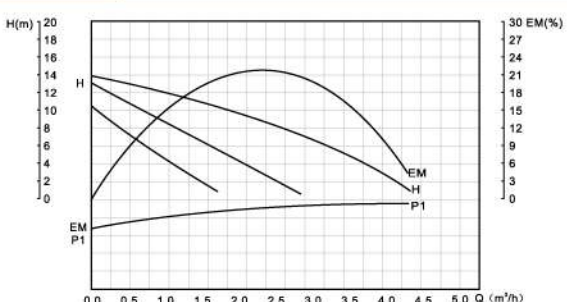


Diagram

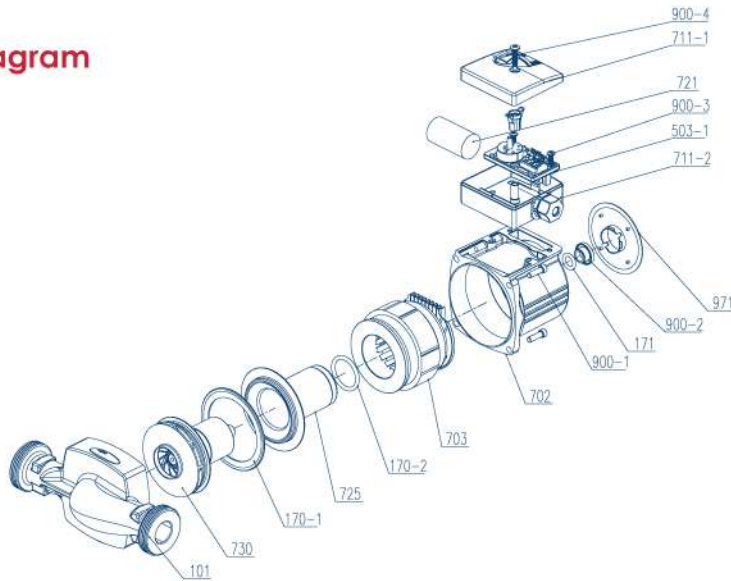


- | | |
|-------|---------------------------------|
| 101 | Pump body |
| 170-1 | Gasket |
| 170-2 | Gasket |
| 171 | O ring |
| 503-1 | terminal plate |
| 702 | Motor case |
| 703 | Stator assembly |
| 711-1 | Terminal box cover |
| 711-2 | Wiring box holder |
| 721 | Capacitor |
| 725 | Shield sleeve |
| 730 | Rotor assembly |
| 900-1 | Hexagon socket head cap screw |
| 900-2 | Vent cock |
| 900-3 | Phillips pan head screw |
| 900-4 | Phillips pan head tapping screw |
| 971 | Nameplate |

Product Parameters

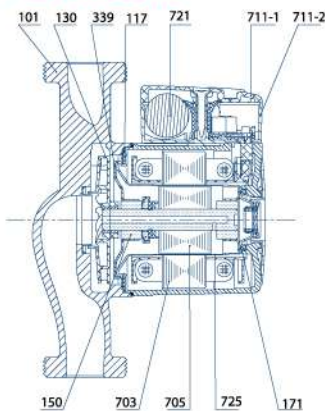

POS.	COMPONENT	CONSTRUCTION CHARACTERISTICS
101	PUMP BODY	Cast iron / Brass
117	GASKET	EPDM heat resistant rubber parts
130	IMPELLER	PES engineering plastic
150	BEARING	Brown Ceramic
171	O RING	EPDM heat resistant rubber parts
339	STAINLESS STEEL COVER	Stainless steel material
703	STATOR	FULL COPPER WIRE
705	ROTOR	Brown Ceramic
711-1	TERMINAL BOX COVER	Black plastic
711-2	TERMINAL BOX SEAT	Black plastic
721	CAPACITOR	Electronic device
725	SHIELD SLEEVE	Stainless steel

Product Dimensions

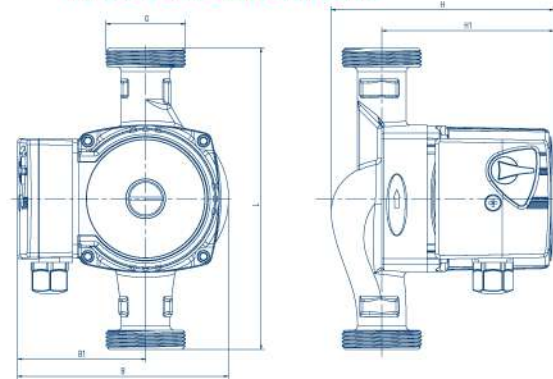

Model	Dimention(mm)					
	L	B	B1	H	H1	G
UPS15-4-130(U)	130	127	76	133	103	1"
UPS15-5-130(U)	130	127	76	133	103	1"
UPS15-6-130(U)	130	127	76	133	103	1"
UPS20-4-130	130	127	76	133	103	1 ¼"
UPS20-5-130	130	127	76	133	103	1 ¼"
UPS20-6-130	130	127	76	133	103	1 ½"
UPS25-4-130(U)	130	127	76	133	103	1 ½"
UPS25-5-130(U)	130	127	76	133	103	1 ½"
UPS25-6-130(U)	130	127	76	133	103	1 ½"
UPS25-7-130(U)	130	127	76	133	103	1 ½"
UPS32-4-130	130	127	76	133	103	2"
UPS32-5-130	130	127	76	133	103	2"
UPS32-6-130	130	127	76	133	103	2"
UPS25-4-180(U)	180	127	76	133	103	1 ½"
UPS25-5-180(U)	180	127	76	133	103	1 ½"
UPS25-6-180(U)	180	127	76	133	103	1 ½"
UPS25-7-180(U)	180	127	76	133	103	1 ½"
UPS32-4-180	180	127	76	133	103	2"
UPS32-5-180	180	127	76	133	103	2"
UPS32-6-180	180	127	76	133	103	2"
UPS32-7-180	180	123	76	145	103	2"
UPS25-8-180(U)	180	135	85	158	135	1 ½"
UPS32-8-180	180	137	85	172	135	2"
UPS20-12-180(U)	180	150	85	152	135	1"
UPS25-12-180	180	150	85	160	135	1 ½"
UPS25-15-180	180	149	85	160	135	1 ½"

GF(m)
Standard Centrifugal Pump
Capacity up to 4000 L/min(240 m³/h)

Head up to 151m

Application Limits

Manometric suction lift up to 7 m
 Liquid temperature between -40 ~ 120°C
 Ambient temperature up to + 40°C
 Max. withstand pressure 16 bar



Installation & Use

They are recommended for pumping clean water without abrasive particles, and liquids that are chemically non aggressive for the materials of which the pump is made. This series can be used to supply and move water in cooling, heating, circulating and conditioning systems, as well as re ghting, irrigation, civil, industrial and agricultural applications. The realisation according to standard EN733- DIN24255 ensure that the dimensions comply with those standards. The constructive from allows the pump body moved without disconnecting it from the pipes. The pumps should be installed in enclosed environment, or at least sheltered from inclement weather.

Construction

Pump Body: Cast iron
 Impeller: cast iron / "S" Stainless steel
 Motor Shaft: Stainless steel.
 Mechanical Seal: Ceramic- graphite.
 Electric Motor: Single- phase 230V- 50Hz with condenser and thermal overload protector built into the copper winding; Three-phase 380/ 400V50Hz.
 Insulation: Class F.
 Protection: IP 55.

Performance





Model	Power	Max.flow	Max.head	Size	Speed	Current(A)	
	(kW)	(m ³ /h)	(m)	(mm)	(rpm)	1~	3~
GF32(m)-125B*	0.75	18	17.5	50*32	2900	1.8	5.15
GF32(m)-125A*	1.1	24	22	50*32	2900	2.5	7
GF32(m)-160C*	1.5	18	25.4	50*32	2900	2.9	9.44
GF32(m)-160B*	2.2	24	31	50*32	2900	4.7	13.4
GF32(m)-160A*	3	27	35	50*32	2900	5.6	18
GF32-200D*	3	27	44.2	50*32	2900	5.8	/
GF32-200C*	4	27	54.5	50*32	2900	6.9	/
GF32-200B*	5.5	24	53	50*32	2900	9.2	/
GF32-200A*	7.5	24	61	50*32	2900	12.8	/
GF32-250C*	9.2	24	75	50*32	2900	16	/
GF32-250B*	11	24	90	50*32	2900	19.3	/
GF32-250A*	15	24	97	50*32	2900	26.8	/
GF40(m)-125C	1.1	36	14.7	65*40	2900	2.5	7
GF40(m)-125B	1.5	42	18.1	65*40	2900	3	9.44
GF40(m)-125A	2.2	48	24.5	65*40	2900	4.7	13.4
GF40(m)-160B	3	42	31.8	65*40	2900	6.4	18
GF40-160A	4	48	38	65*40	2900	6.9	/
GF40-200B*	5.5	42	46	65*40	2900	9.4	/
GF40-200A*	7.5	48	57	65*40	2900	13	/

Standard Centrifugal Pump

Performance





Model	Power	Max.flow	Max.head	Size	Speed	Current(A)	
	(kW)	(m³/h)	(m)	(mm)	(rpm)	1~	3~
GF40-250D	9.2	48	64	65*40	2900	15.5	/
GF40-250C	11	48	72	65*40	2900	18.8	/
GF40-250B	15	48	84.5	65*40	2900	27.3	/
GF40-250A	18.5	48	90	65*40	2900	30.7	/
GF50(m)-125C	2.2	72	17	65*50	2900	4.7	13.4
GF50(m)-125B	3	72	20	65*50	2900	6.4	18
GF50-125A	4	84	24	65*50	2900	7	/
GF50-160C	4	84	28	65*50	2900	7.5	/
GF50-160B	5.5	84	32	65*50	2900	9.4	/
GF50-160A	7.5	90	40	65*50	2900	13	/
GF50-200C	9.2	84	50.5	65*50	2900	16.5	/
GF50-200B	11	90	57.5	65*50	2900	19	/
GF50-200A	15	90	62	65*50	2900	27.4	/
GF50-250C	15	84	68.5	65*50	2900	27	/
GF50-250B	18.5	90	79	65*50	2900	31.5	/
GF50-250A	22	90	89.5	65*50	2900	38	/
GF65-125C	4	90	19	80*65	2900	7.5	/
GF65-125B	5.5	108	23	80*65	2900	9.3	/
GF65-125A	7.5	120	27	80*65	2900	12.5	/
GF65-160C	9.2	120	33	80*65	2900	16	/
GF65-160B	11	120	36	80*65	2900	18.5	/
GF65-160A	15	138	42	80*65	2900	27.4	/
GF65-200C	15	120	45	80*65	2900	27	/
GF65-200B	18.5	120	52	80*65	2900	30.8	/
GF65-200A	22	138	59	80*65	2900	37.8	/
GF65-250C	22	120	64.8	80*65	2900	39.5	/
GF65-250B	30	138	80	80*65	2900	53	/
GF65-250A	37	138	92	80*65	2900	69.8	/
GF65-315D	45	144	102.	80x65	2900	83.9	/
GF65-315C	55	180	122	80*65	2900	103	/
GF65-315B	75	210	141	80x65	2900	140	/
GF65-315A	90	210	151	80x65	2900	167	/
GF80-125C	4	120	17	100*80	2900	8.2	/
GF80-125B	5.5	138	21	100*80	2900	9.5	/
GF80-125A	7.5	138	26	100*80	2900	13	/
GF80-160D	11	180	28	100*80	2900	19	/
GF80-160C	15	210	34	100*80	2900	27.4	/
GF80-160B	18.5	210	39	100*80	2900	31	/
GF80-160A	22	210	44	100*80	2900	38	/
GF80-200B	22	210	48	100*80	2900	38	/
GF80-200A	30	210	60	100*80	2900	53	/
GF80-250C	37	210	71.5	100*80	2900	65	/
GF80-250B	45	210	88	100*80	2900	77	/
GF80-250A	55	210	94.5	100*80	2900	103	/
GF80-315D	45	210	85	100x80	2900	83.9	/
GF80-315C	55	210	98	100x80	2900	103	/
GF80-315B	75	240	124	100x80	2900	126	/
GF80-315A	90	240	144	100x80	2900	167	/

Performance

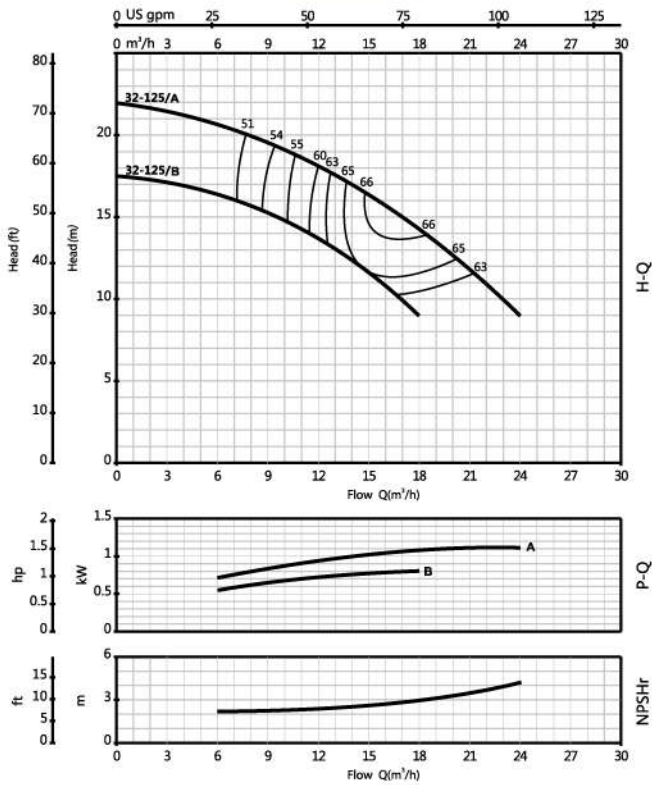
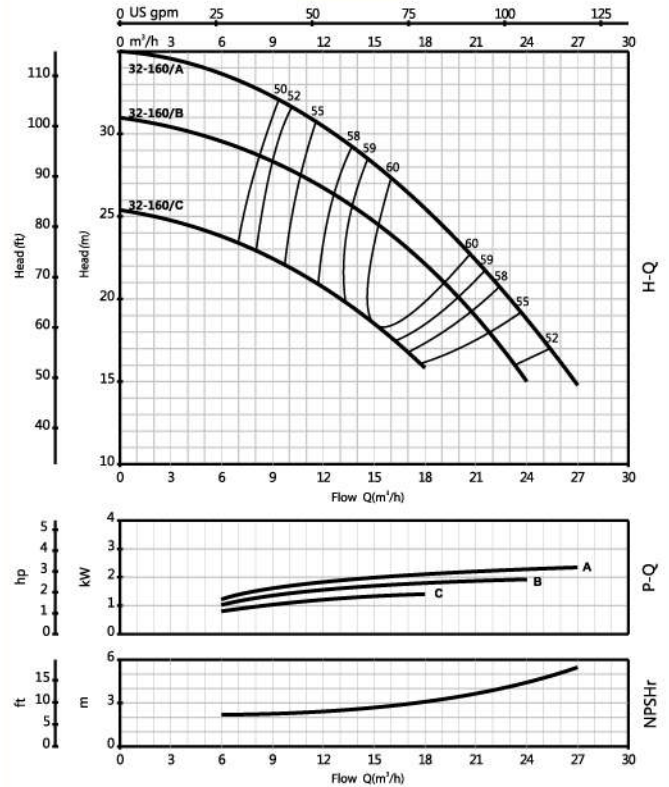
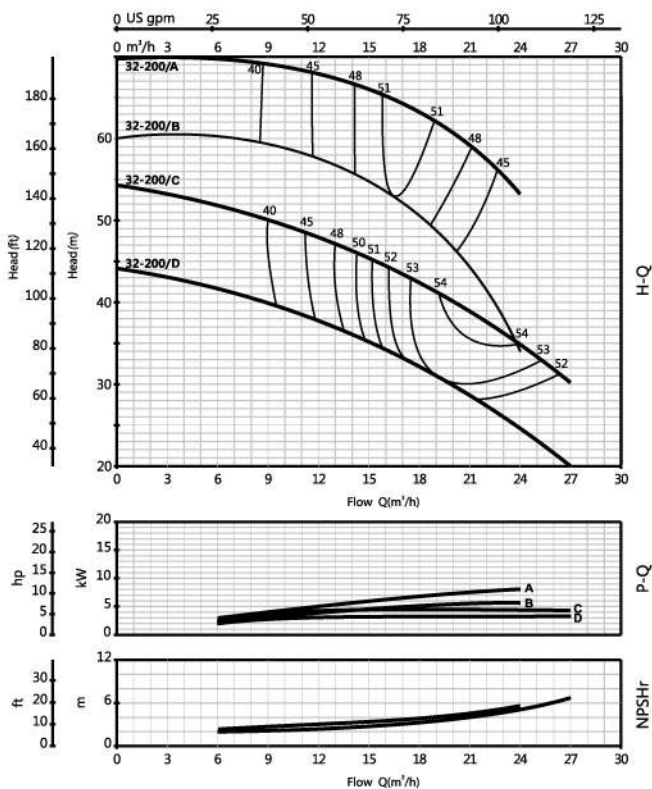
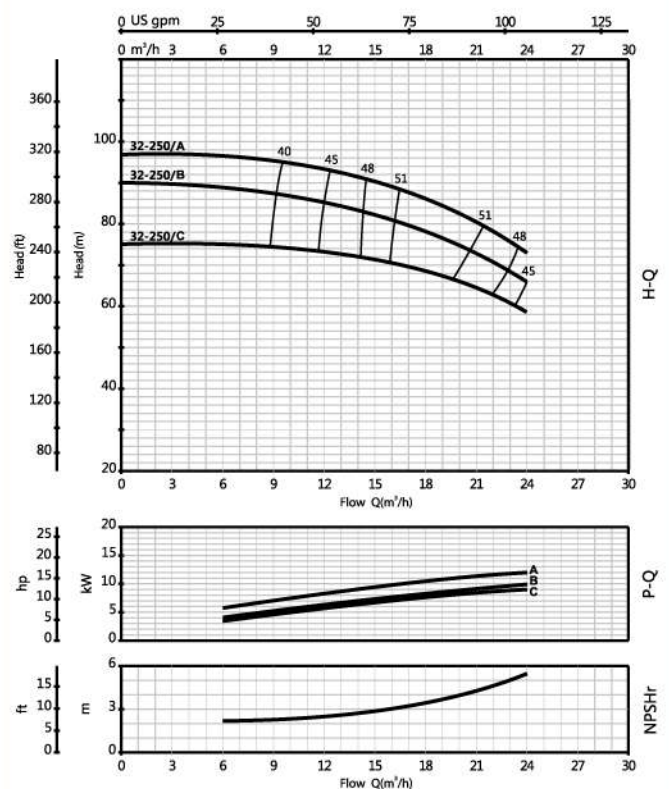
32-125

32-160

32-200

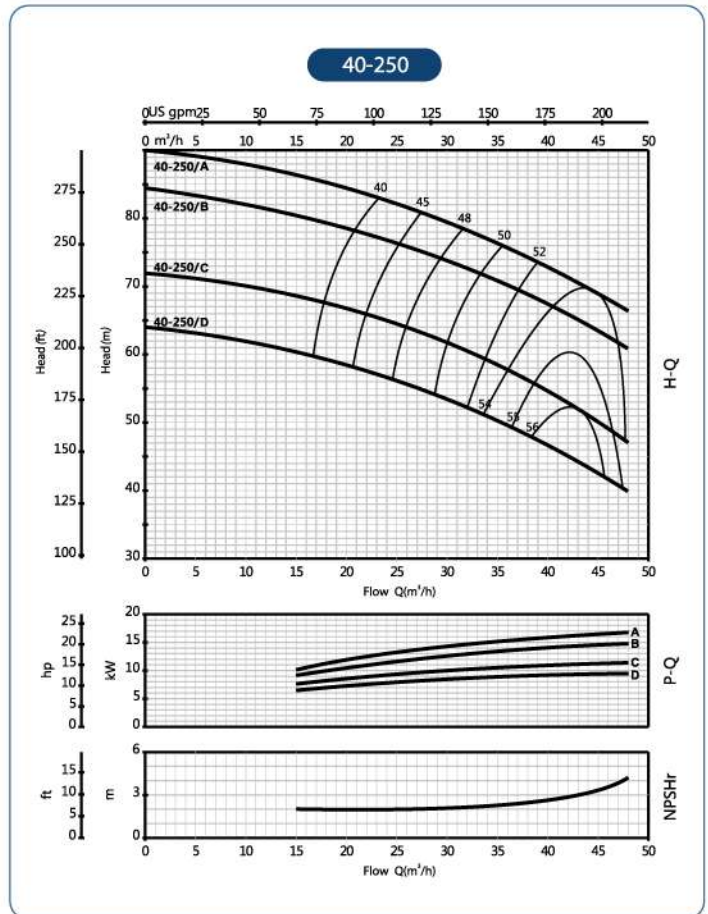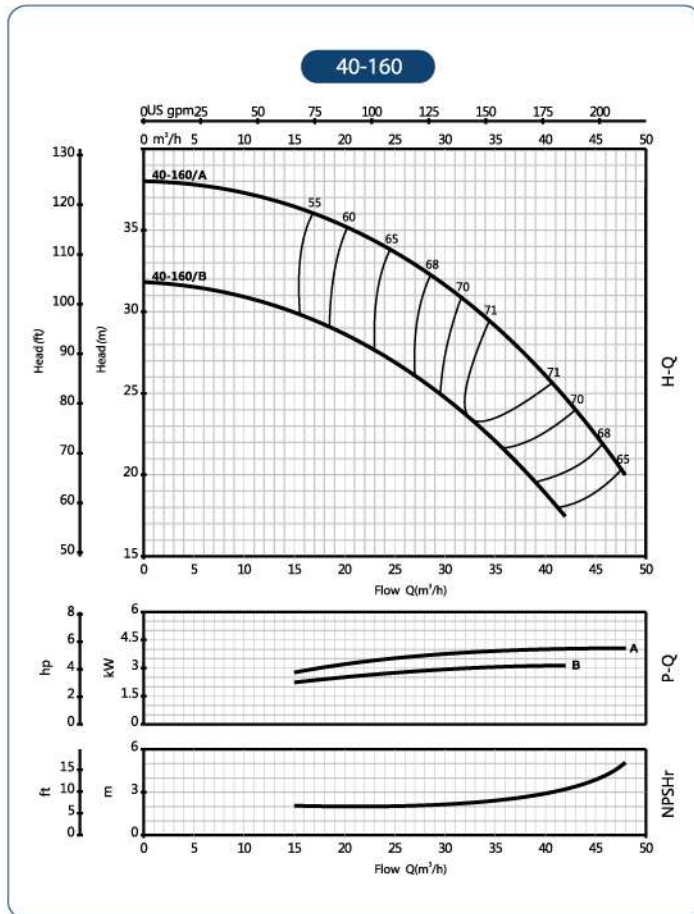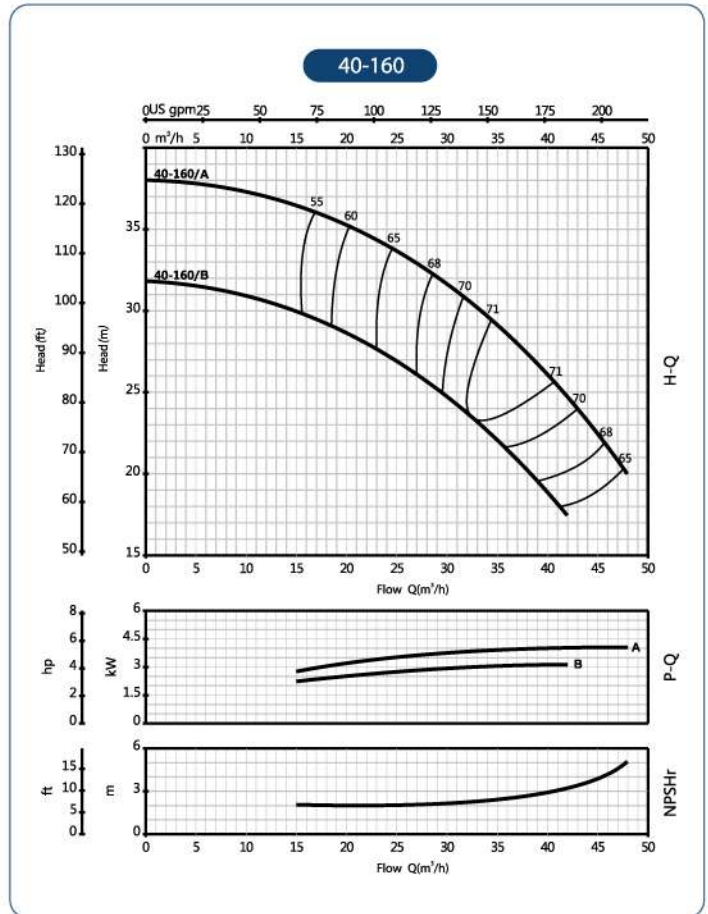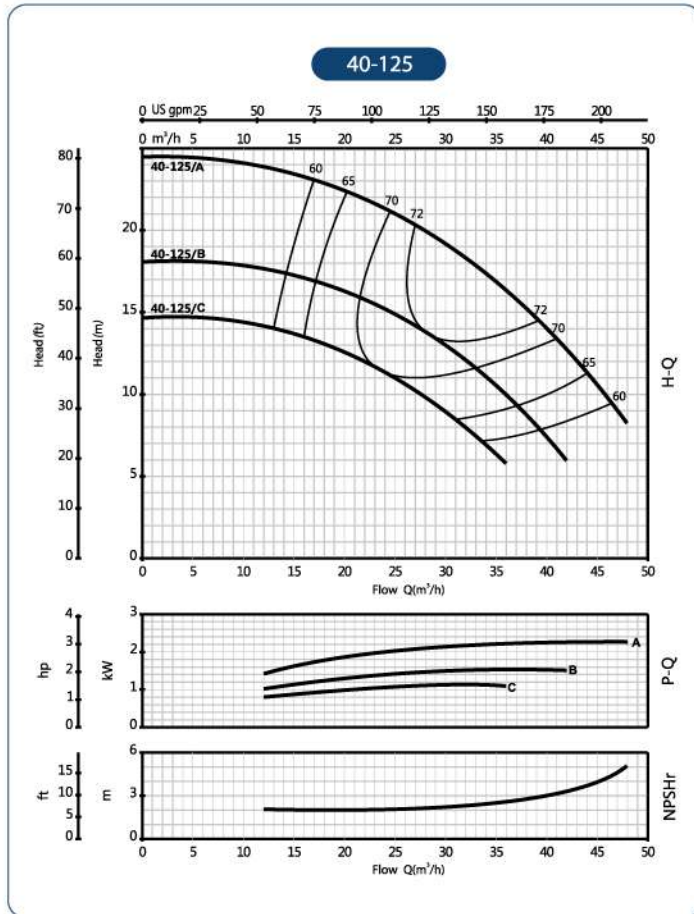32-250


Standard Centrifugal Pump

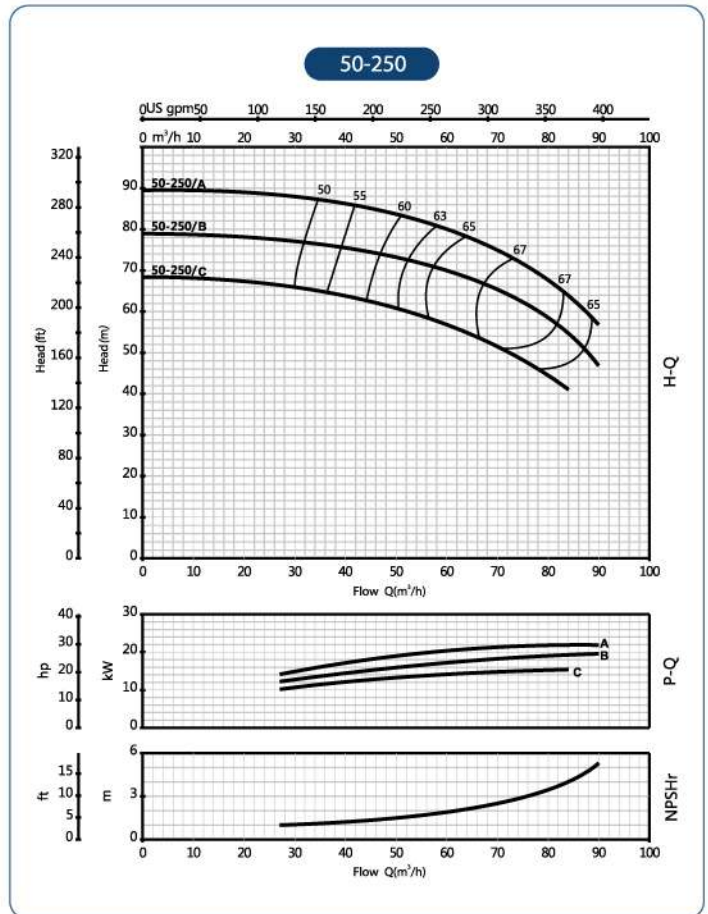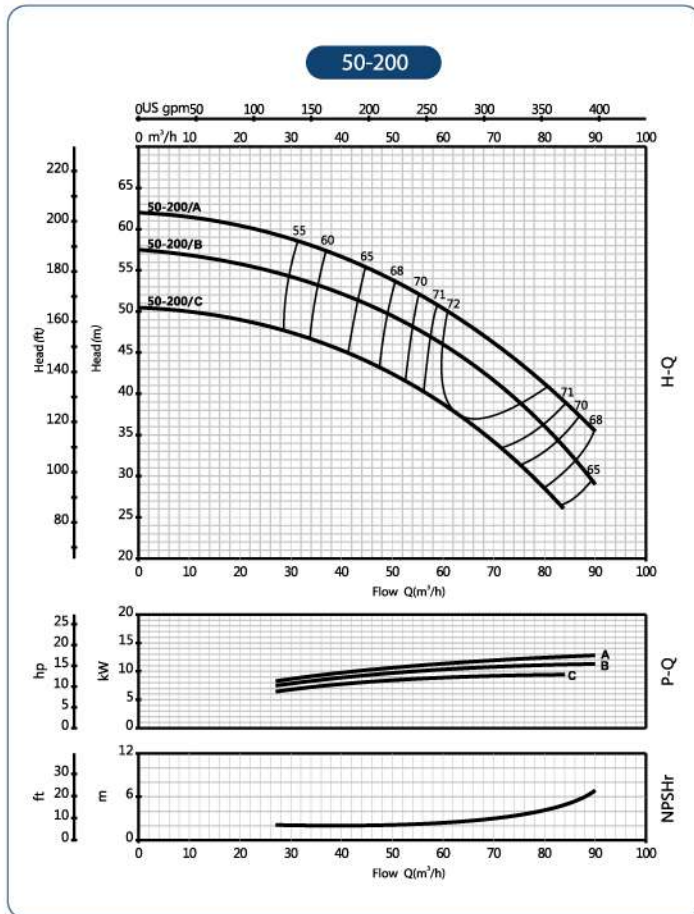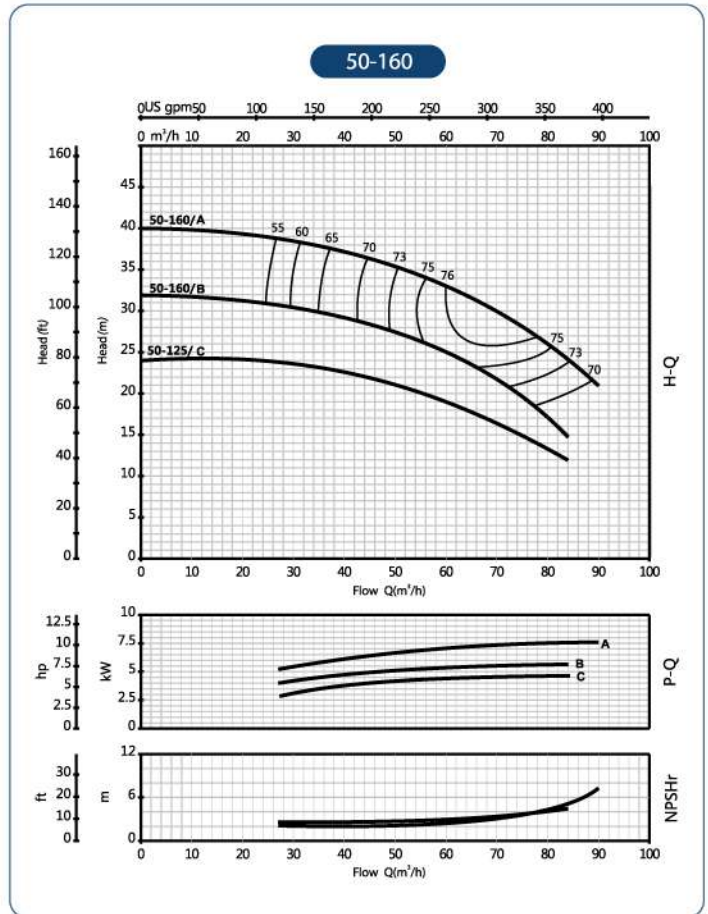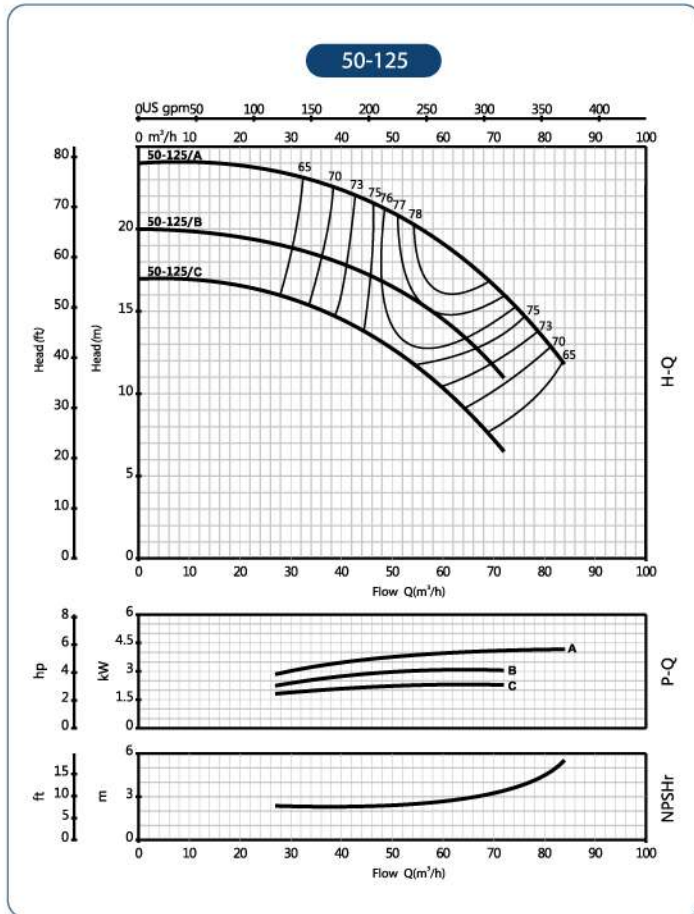Performance




Performance




Standard Centrifugal Pump

Performance


65-125

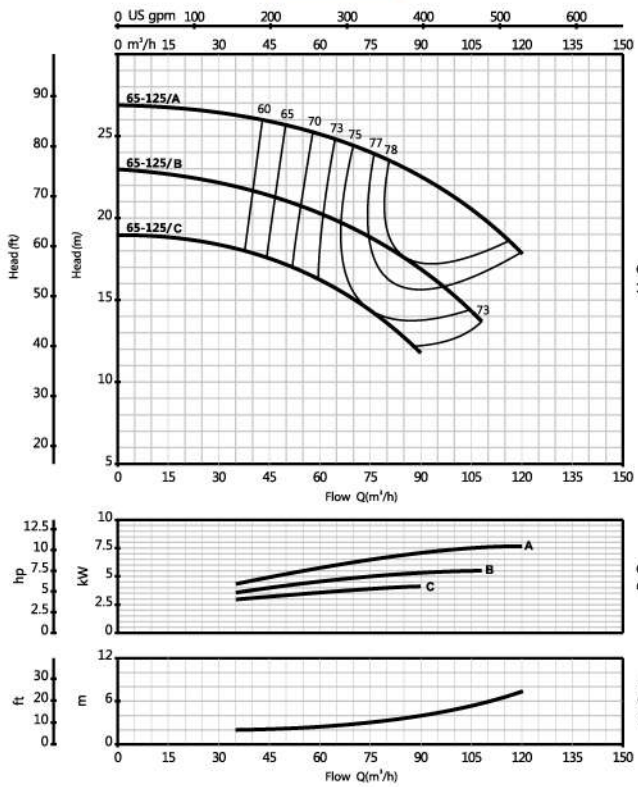


65-160

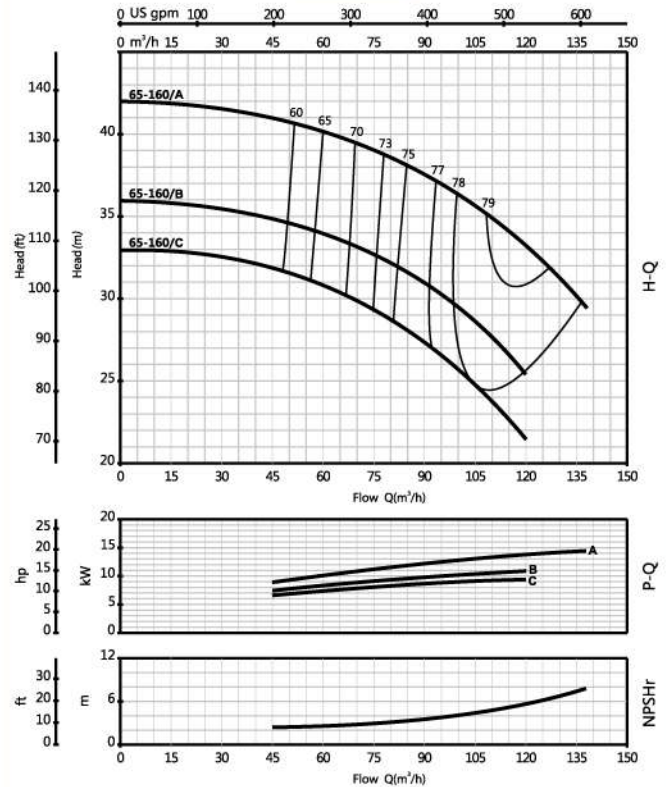





65-200

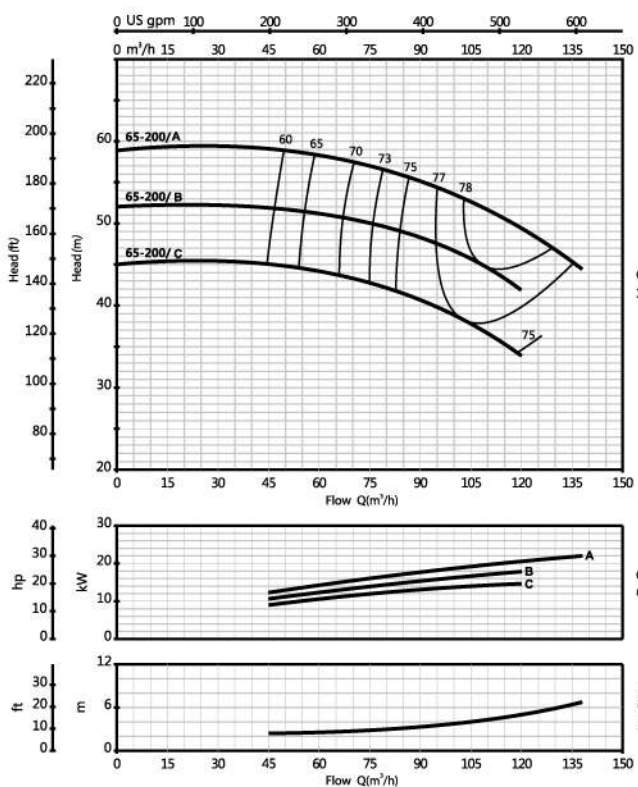

65-250


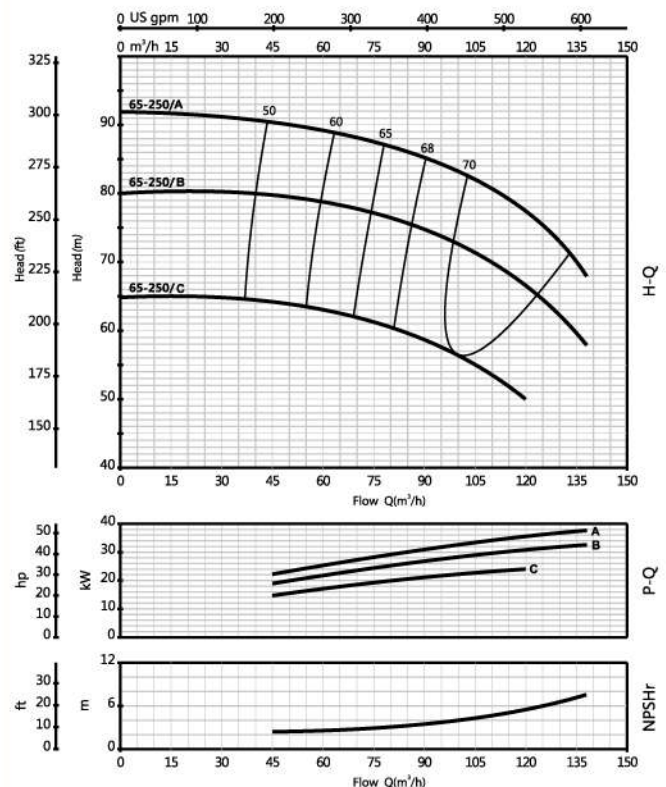


Performance

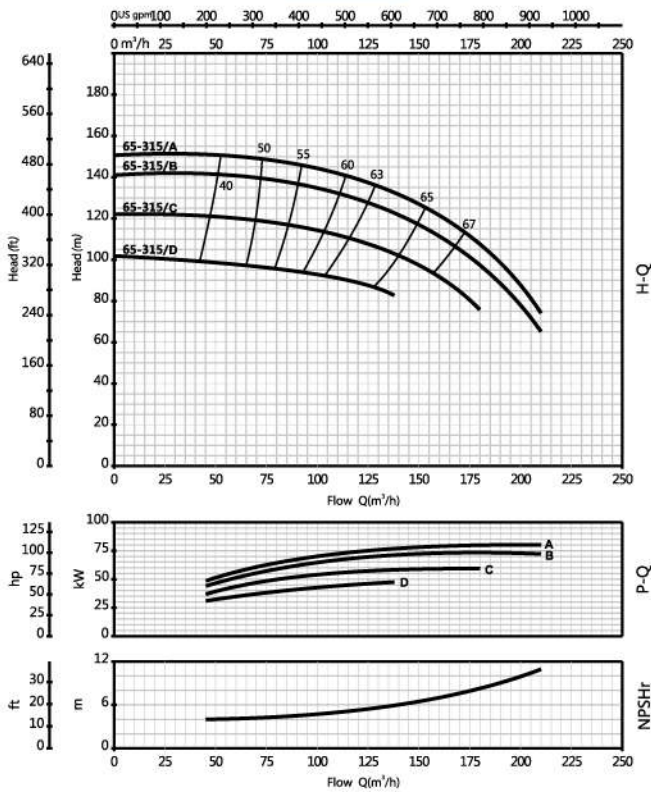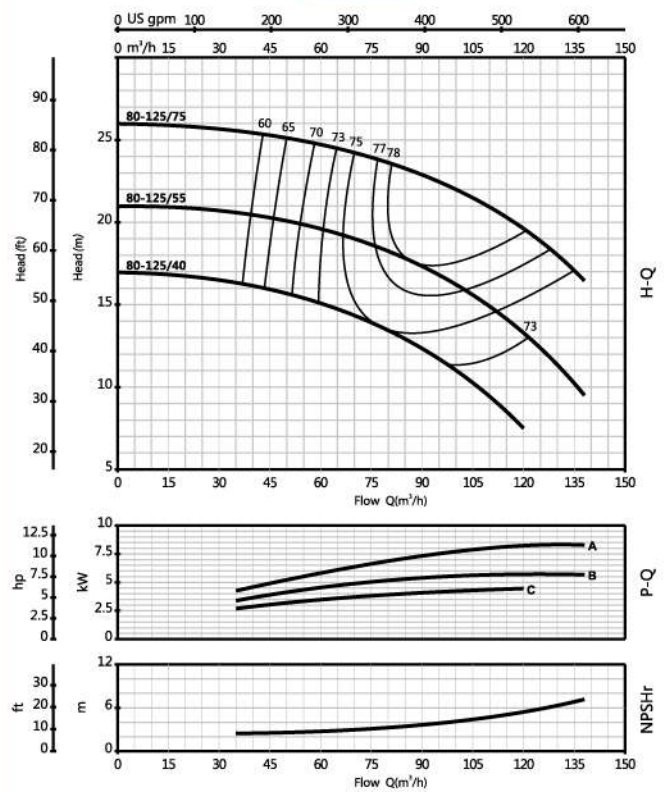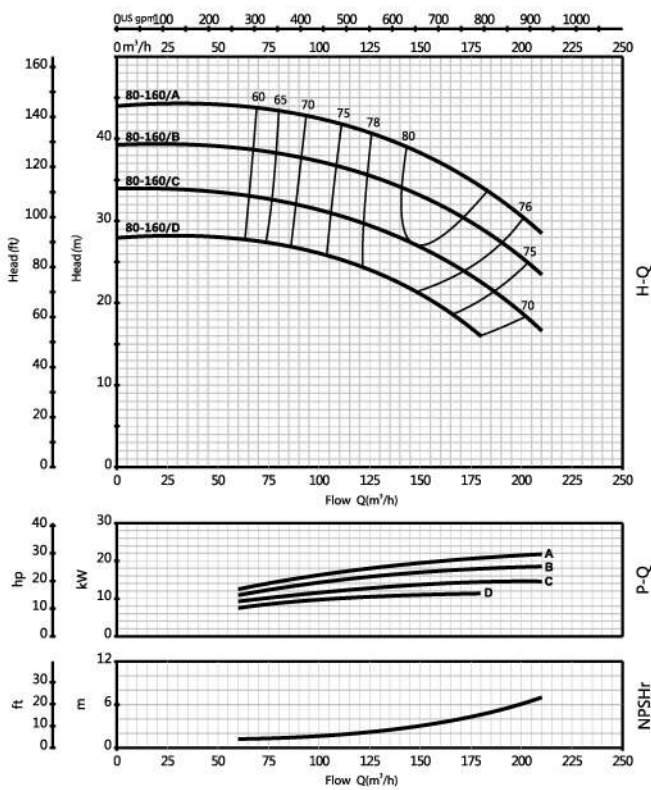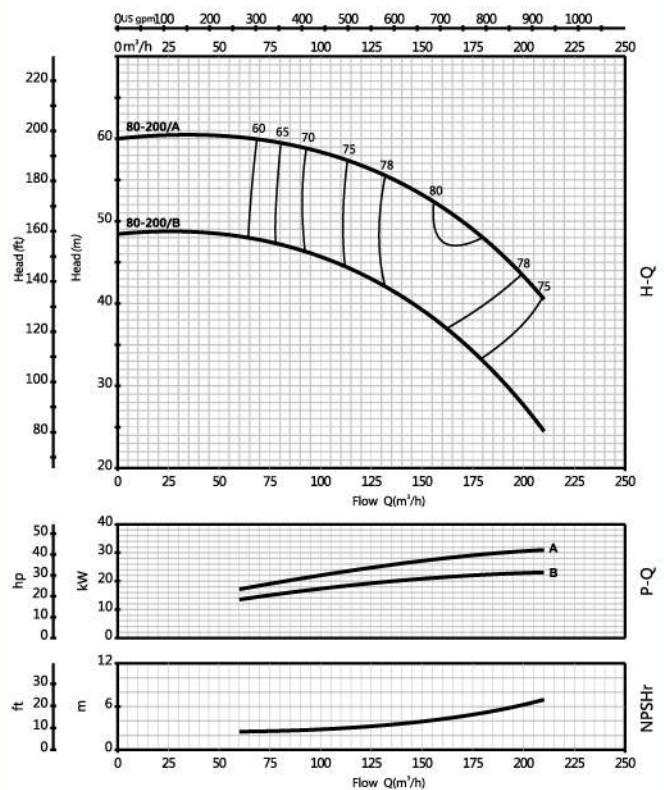
65-315

80-125

80-160

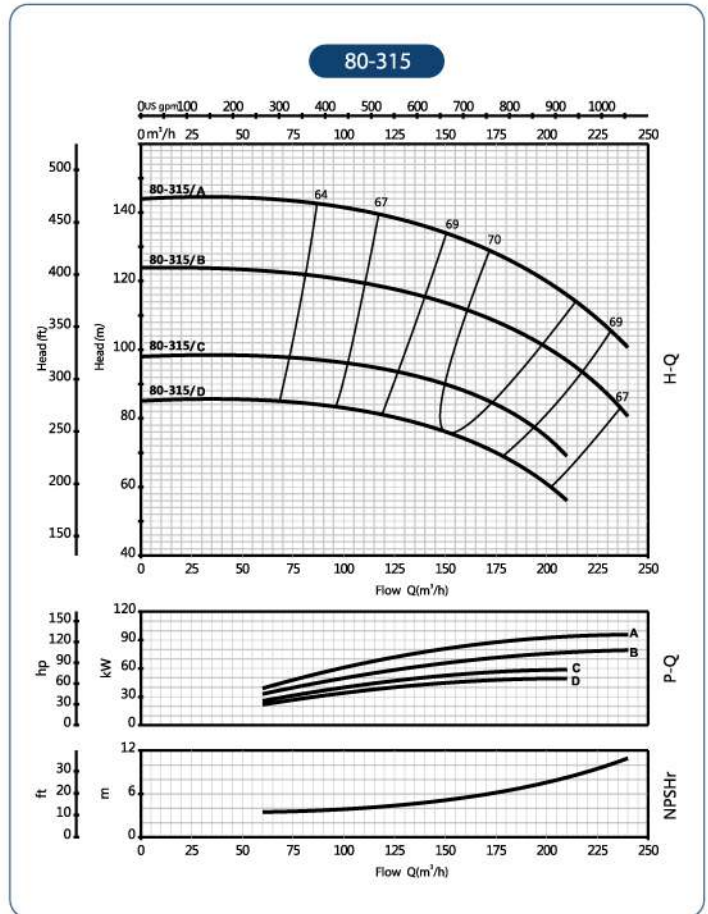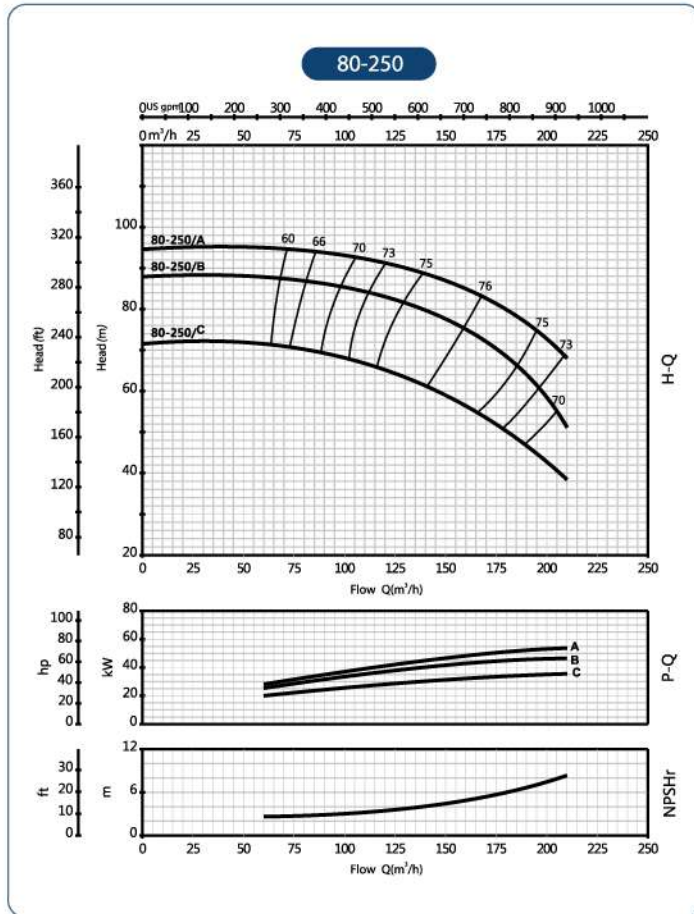80-200


Standard Centrifugal Pump

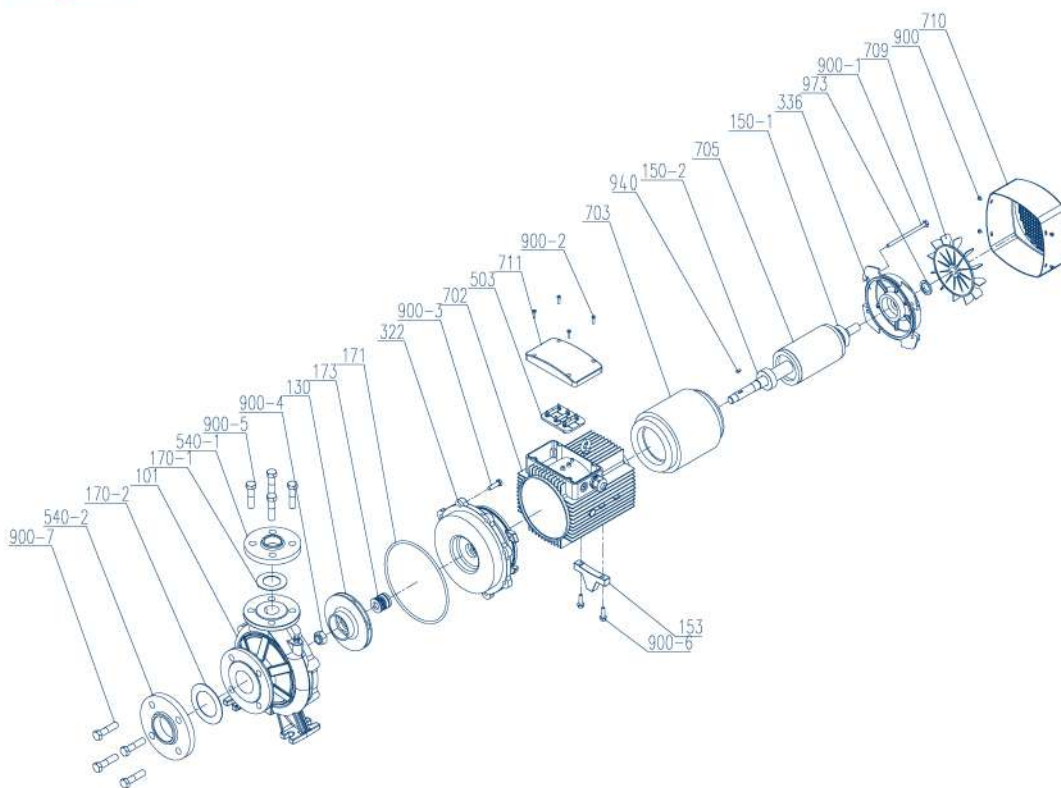Performance




Diagram




- 101 Pump body
- 130 Impeller
- 150-1 Bearing
- 150-2 Bearing
- 153 Bracket
- 170-1 Gasket
- 170-2 Gasket
- 171 O ring
- 173 Mechanical seal
- 322 Coupling
- 336 Motor back cover
- 503 Terminal
- 540-1 Flange
- 540-2 Flange
- 702 Barrel
- 703 Stator core with winding
- 705 Rotor
- 709 Fan
- 710 Fan cover
- 711 Terminal box cover
- 900 Cross recessed round head screw with washer
- 900-1 Hexagon headed bolt
- 900-2 Phillips pan head screw
- 900-3 Hexagon headed bolt
- 900-4 Lock nut
- 900-5 Hexagon headed bolt
- 900-6 Hexagon flange bolt
- 900-7 Hexagon headed bolt
- 940 Key
- 973 Dustproof ring

Product Parameters

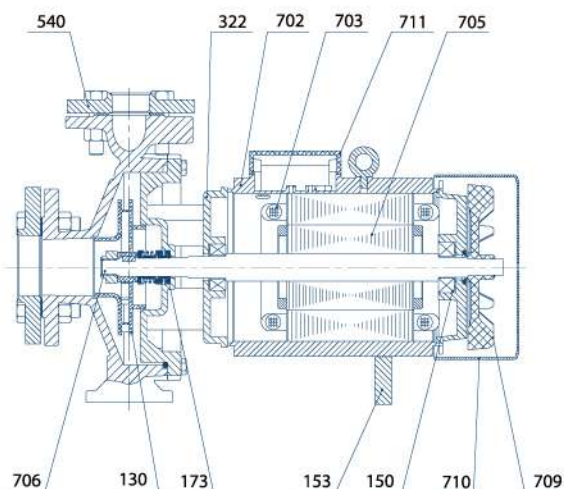

POS.	COMPONENT	CONSTRUCTION CHARACTERISTICS
130	IMPELLER	Cast iron
150	BEARING	NSK
153	STAND	Cast iron
173	MECHANICAL SEAL	Hot water type, silicon carbide/graphite/EPDM
322	COUPLING	Cast iron
540	FLANGE	Steel
702	MOTOR CASE	Aluminium
703	STATOR	Stator assembly
705	ROTOR	Rotor assembly
706	PUMP SHAFT	Carbon steel chrome plated shaft
709	FAN	Stator core with winding
710	FAN COVER	Steel
711	TERMINAL BOX COVER	Aluminium

Product Dimensions

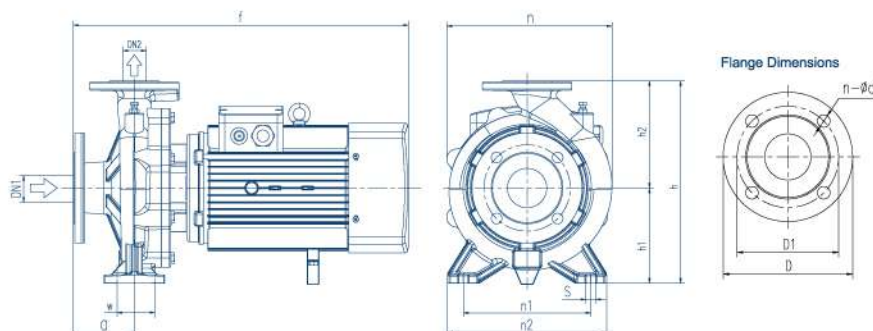

DN	Flange Dimensions		
	ΦD	ΦD1	n - d
DN32	140	100	4-Φ18
DN40	150	110	4-Φ18
DN50	165	125	4-Φ18
DN65	185	145	4-Φ18
DN80	200	160	4-Φ18
DN100	220	180	4-Φ18
DN125	250	210	4-Φ18

Model	Dimensions(mm)											
	DN1	DN2	a	f	h	h1	h2	n	n1	n2	W	S
GF32(m)-125B*	50	32	80	435	255	114	141	202	140	190	70	15
GF32(m)-125A*	50	32	80	435	255	114	141	202	140	190	70	15
GF32(m)-160C*	50	32	83	435	295	133	162	245	190	245	70	15
GF32(m)-160B*	50	32	83	435	295	133	162	245	190	245	70	15
GF32(m)-160A*	50	32	83	470	295	133	162	245	190	245	70	15
GF32-200D*	50	32	82	490	342	161	181	265	190	240	70	15
GF32-200C*	50	32	82	490	342	161	181	265	190	240	70	15
GF32-200B*	50	32	88	590	405	186	219	333	250	328	98	16
GF32-200A*	50	32	88	590	405	186	219	333	250	328	98	16
GF32-250C*	50	32	88	590	405	186	219	333	250	328	98	16
GF32-250B*	50	32	88	590	405	186	219	333	250	328	98	16
GF32-250A*	50	32	94	712	415	186	229	327	250	327	98	16
GF40(m)-125C	65	40	82	440	260	116	144	220	160	212	74	15
GF40(m)-125B	65	40	82	440	260	116	144	220	160	212	74	15
GF40(m)-125A	65	40	82	440	260	116	144	220	160	212	74	15
GF40(m)-160C	65	40	80	590	305	135	170	250	190	241	74	15
GF40(m)-160B	65	40	80	590	305	135	170	250	190	241	74	15
GF40-160A	65	40	80	590	305	135	170	250	190	241	74	15
GF40-200B*	65	40	102	560	345	162	193	282	214	267	74	15
GF40-200A*	65	40	102	560	345	162	193	282	214	267	74	15

Standard Centrifugal Pump

Product Dimensions

Model	Dimensions(mm)											
	DN1	DN2	a	f	h	h1	h2	n	n1	n2	W	S
GF40-250D	65	40	94	712	415	186	229	327	250	327	98	15
GF40-250C	65	40	94	712	415	186	229	327	250	327	98	15
GF40-250B	65	40	94	712	415	186	229	327	250	327	98	15
GF40-250A	65	40	94	712	415	186	229	327	250	327	98	15
GF50(m)-125C	65	50	102	525	305	135	170	263	190	245	74	15
GF50(m)-125B	65	50	102	525	305	135	170	263	190	245	74	15
GF50-125A	65	50	102	525	305	135	170	263	190	245	74	15
GF50-160C	65	50	110	560	348	164	184	270	212	262	74	15
GF50-160B	65	50	110	560	348	164	184	270	212	262	74	15
GF50-160A	65	50	110	560	348	164	184	270	212	262	74	15
GF50-200C	65	50	104	722	392	186	206	307	232	310	74	15
GF50-200B	65	50	104	722	392	186	206	307	232	310	74	15
GF50-200A	65	50	102	720	416	186	230	330	250	327	74	15
GF50-250C	65	50	102	720	416	186	230	330	250	327	98	15
GF50-250B	65	50	102	720	416	186	230	330	250	327	98	15
GF50-250A	65	50	102	720	416	186	230	330	250	327	98	15
GF65-125C	80	65	104	580	345	162	183	275	212	280	98	15
GF65-125B	80	65	104	580	345	162	183	275	212	280	98	15
GF65-125A	80	65	104	580	345	162	183	275	212	280	98	15
GF65-160C	80	65	110	730	425	186	239	330	232	309	98	15
GF65-160B	80	65	110	730	425	186	239	330	232	309	98	15
GF65-160A	80	65	110	730	425	186	239	330	232	309	98	15
GF65-200C	80	65	111	740	425	186	239	330	232	309	98	15
GF65-200B	80	65	111	740	425	186	239	330	232	309	98	15
GF65-200A	80	65	111	740	425	186	239	330	232	309	98	15
GF65-250C	80	65	116	870	420	180	240	369	280	360	60	18
GF65-250B	80	65	116	990	420	180	240	369	280	360	60	18
GF65-250A	80	65	116	990	420	180	240	369	280	360	60	18
GF65-315D	80	65	125	1069	505	225	280	440	280	360	60	18
GF65-315C	80	65	125	1160	505	225	280	440	280	360	60	18
GF65-315B	80	65	125	1232	505	225	280	440	280	360	60	18
GF65-315A	80	65	125	1283	505	225	280	440	280	360	60	18
GF80-125C	100	80	117	750	357	163	194	330	212	280	49	15
GF80-125B	100	80	117	750	357	163	194	330	212	280	49	15
GF80-125A	100	80	117	750	357	163	194	330	212	280	49	15
GF80-160D	100	80	88	750	435	186	250	330	255	332	49	15
GF80-160C	100	80	88	750	435	186	250	330	255	332	49	15
GF80-160B	100	80	88	750	435	186	250	330	255	332	49	15
GF80-160A	100	80	88	750	435	186	250	330	255	332	49	15
GF80-200B	100	80	125	880	460	250	210	360	280	345	48	14
GF80-200A	100	80	125	950	460	250	210	360	280	345	48	14
GF80-250C	100	80	125	950	535	250	285	410	315	400	60	18
GF80-250B	100	80	125	980	535	250	285	410	315	400	60	18
GF80-250A	100	80	125	1160	535	250	285	410	315	400	60	18
GF80-315D	100	80	125	1069	565	250	315	452	315	400	60	18
GF80-315C	100	80	125	1160	565	250	315	452	315	400	60	18
GF80-315B	100	80	125	1232	565	250	315	452	315	400	60	18
GF80-315A	100	80	125	1283	565	250	315	452	315	400	60	108

GCO(m) Horizontal Stainless Steel Centrifugal Pump

Capacity up to 730 L/min(43.8 m³/h)

Head up to 21.5m

Application Limits

Medium temperature : standard model: -20~ + 70℃

high temperature: -20~ + 104℃

Environmental temperature : ≤ 50℃

Max.working pressure : 1 MPa



Installation & Use

GCO series is horizontal stainless steel pump, it's suitable for pumping clean water without abrasive particles, and liquids that are chemically non aggressive for the materials of which the pump is made. This series can be used to supply and move water in cooling, heating, circulating and conditioning systems, as well as irrigation, civil, industrial and agricultural applications. The pumps should be installed in enclosed environment, or at least sheltered from inclement weather.

Construction

Pump Body: Stainless steel.

Motor Shaft: stainless steel.

Motor housing: Aluminum.

Mechanical Seal: Ceramic- graphite.



Electric Motor: Closed,externally ventilated.

Thermal protector: Single-phase.

Insulation: Class F.

Protection: IP 55.

Performance

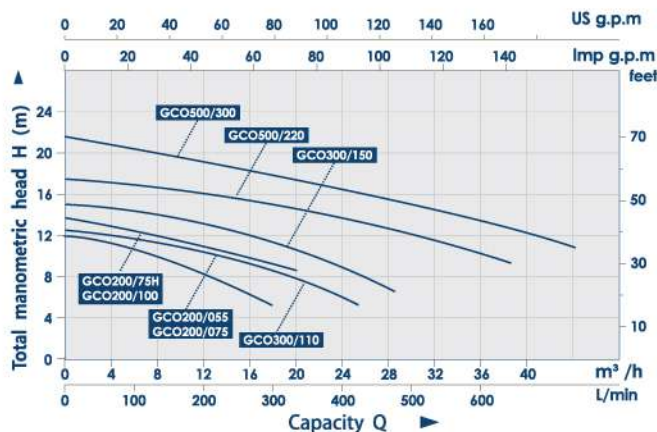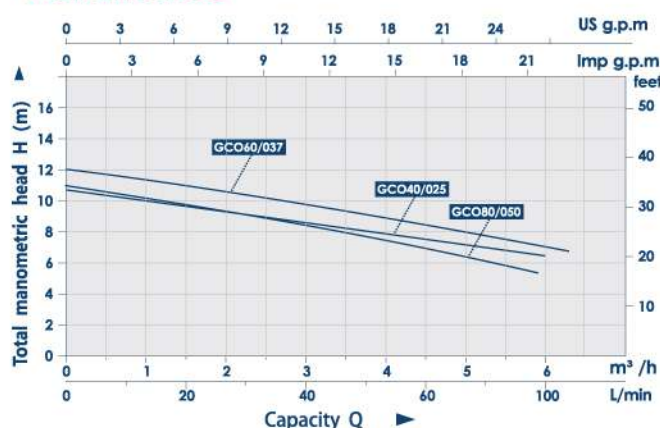


Model	Power		Rated head	Rated flow	Current(A)		Size	Q(m³/h)	0	1	2	3	4	5	6
	KW	HP			M	m³/H			1~	3~	Inch	Q(L/min)	0	17	33
GCO(m)40/025	0.25	0.34	8	2.4	2	0.7	1.25"×1"	H(m)	10.5	10	9.2	8.5	8	7	6.5
GCO(m)60/037	0.37	0.5	9	3.6	2.4	1	1.25"×1"		12	11.5	10.5	9.7	9	8	7
GCO(m)80/050	0.37	0.5	6.5	4.8	2.4	1	1.25"×1"		11	10	9.2	8.3	7.5	6.5	

Model	Power		Rated head	Rated flow	Current(A)		Size	Q(m³/h)	0	4	8	12	16	20	24	28	32	36	40
	KW	HP			M	m³/H			1~	3~	Inch	Q(L/min)	0	67	133	200	267	333	400
GCO(m)200/055	0.55	0.75	8	12	12	12	1.5"×1.5"	H(m)	12	11	10	8	6						
GCO(m)200/075	0.75	1	8	12	12	12	1.5"×1.5"		12	11	10	8	6						
GCO(m)200/75H	0.75	1	10	12	12	12	1.5"×1.5"		14	13	12	11	10	9					
GCO(m)200/100	1.0	1.35	10	12	12	12	1.5"×1.5"		14	13	12	11	10	9					
GCO(m)300/110	1.1	1.5	7.5	18	18	18	2"×2"		12.5	12	11.5	10.5	9	8	6				
GCO(m)300/150	1.5	2	10.5	18	18	18	2"×2"		15	14.5	14	13.5	12	10.5	8.5	6.5			
GCO(m)500/220	2.2	3	11	30	30	30	2.5"×2"		17.5	17	16.5	16	15.5	14.5	13.5	12.5	11.5	10	
GCO500/300	3.0	4	15	30	30	30	2.5"×2"		21.5	21	20	19	18	17.5	16.5	15.5	14.5	13.5	12



Commercial Centrifugal Pump

Diagram

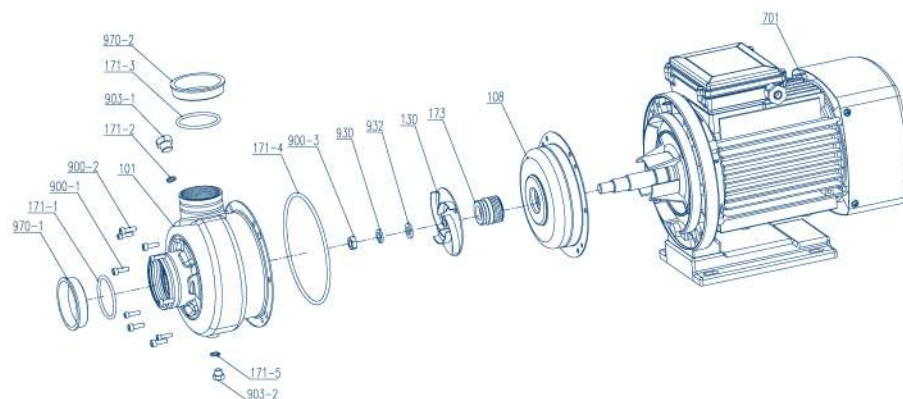

- 101** Pump body
- 108** Pump cover
- 130** Impeller
- 171-1** O ring
- 171-2** O ring
- 171-3** O ring
- 171-4** O ring
- 171-5** O ring
- 173** Mechanical seal
- 701** Motor
- 900-1** Hexagon socket head cap screw
- 900-2** Hexagon socket head cap screw
- 900-3** Lock nut
- 903-1** Plug screw
- 903-2** Plug screw
- 930** Spring washer
- 932** Flat washer
- 970-1** Dust cover
- 970-2** Dust cover

Product Dimensions

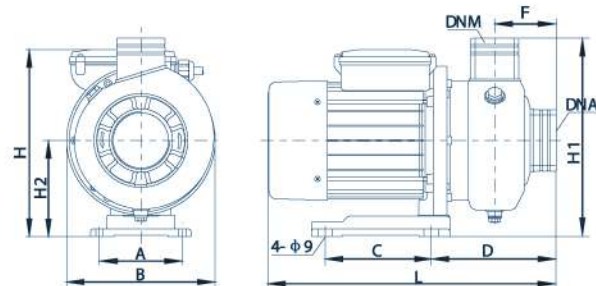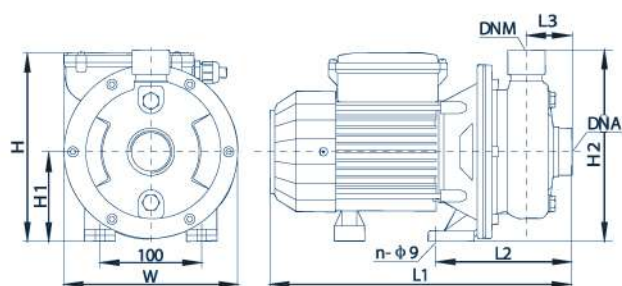

Model	Dimension(mm)									n
	L1	L2	L3	W		H1	H2	H		
				1~	3~			1~	3~	
GCO(m)40/025	267	120	52	170	166	84	190	181	177	4
GCO(m)60/037	267	120	52	170	166	84	190	181	177	4
GCO(m)80/050	298	130	45	172	171	88	188	185	181	2

Model	Dimension(mm)								
	A	B	C	D	F	L	H	H1	H2
GCO(m)200/055	120	172	/	159	75	335	216	234	110
GCO(m)200/075	120	172	/	159	75	335	216	234	110
GCO(m)200/75H	120	172	/	159	75	335	216	234	110
GCO(m)200/100	120	172	/	159	75	335	216	234	110
GCO(m)300/110	108	193	138	165	82	378	243	258	125
GCO(m)300/150	108	193	138	165	82	378	243	258	125
GCO(m)500/220	108	193	138	165	82	413	242	258	125
GCO500/300	108	193	138	165	82	430	242	258	125

4SRm

Deep well Pump

Capacity up to 300 L/min(18 m³/h)

Head up to 388 m

Application Limits

Medium temperature does not exceed +40°C;
 Medium PH values between 6.5 and 8.5;
 The volume ratio of solid impurities in the medium is not more than 0.1%, and the particle size is not more than 0.2mm;
 Diving depth does not exceed 70 meters;
 Min. applicable well diameter: 4"





Installation & Use

This series of electric pumps has a multi-stage impeller structure with a high head and wide application. It is suitable for pumping water in boreholes, ponds and lakes, lawn irrigation, domestic tap water, swimming pool filling, water tower and cistern delivery, fountains, agricultural drainage and irrigation, etc.

Construction

Delivery Body: Stainless steel AISI 304
 Diffuser: POM
 Top chock: SUS304
 Outlet: SUS304
 Connector: SUS304
 Pump Shaft: Stainless steel
 Drive Coupling: Stainless steel AISI 304
 Insulation: Class B
 Protection: IP 68



Performance

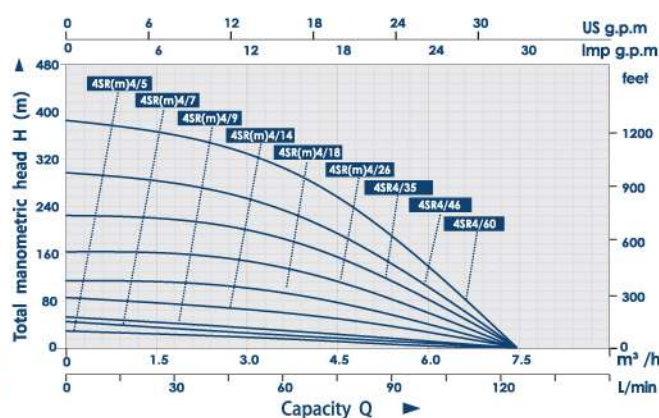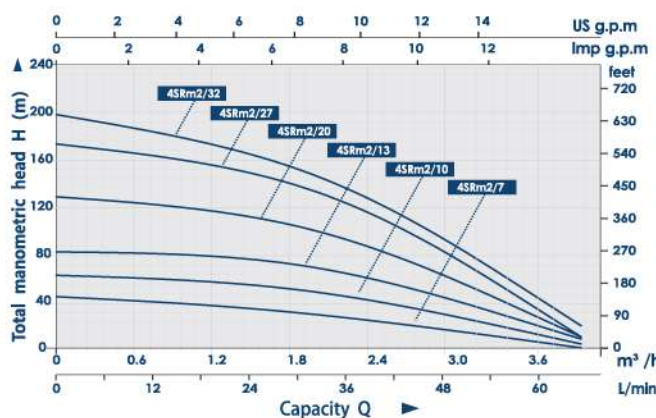

Model	Power		Current(A)		Size	Q(m ³ /h)	H(m)						
	KW	HP	1~	3~	Inch		0	0.6	1.2	1.8	2.4	3	3.6
4SR(m)2/7	0.37	0.5	3.2	1.8	1 1/4"/1 1/2"/2"	H(m)	42	40	36	33	23	13	2
4SR(m)2/10	0.55	0.75	4.2	2.2	1 1/4"/1 1/2"/2"		63	60	56	49	39	26	13
4SR(m)2/13	0.75	1	5.8	2.8	1 1/4"/1 1/2"/2"		82	80	78	70	55	40	18
4SR(m)2/20	1.1	1.5	8.6	3.8	1 1/4"/1 1/2"/2"		128	120	113	102	77	52	23
4SR(m)2/27	1.5	2	10.2	4.8	1 1/4"/1 1/2"/2"		175	169	162	145	110	78	36
4SR(m)2/32	2.2	3	15.2	6	1 1/4"/1 1/2"/2"		198	187	170	150	123	83	42



Model	Power		Current(A)		Size	Q(m ³ /h)	H(m)										
	KW	HP	1~	3~	Inch		0	1.2	1.8	2.4	3	3.6	4.2	4.8	5.4	6.6	
4SR(m)4/5	0.37	0.5	3.2	1.8	1 1/4"/1 1/2"/2"	H(m)	33	31	31	29	29	27	24	20	16	7	
4SR(m)4/7	0.55	0.75	4.2	2.2	1 1/4"/1 1/2"/2"		46	44	43	41	40	37	33	28	23	10	
4SR(m)4/9	0.75	1	5.8	2.8	1 1/4"/1 1/2"/2"		60	56	55	54	50	48	44	38	30	12	
4SR(m)4/14	1.1	1.5	8.6	3.8	1 1/4"/1 1/2"/2"		92	88	85	80	78	73	68	58	50	22	
4SR(m)4/18	1.5	2	10.2	4.8	1 1/4"/1 1/2"/2"		117	110	108	104	100	92	84	76	63	26	
4SR(m)4/26	2.2	3	15.2	6	1 1/4"/1 1/2"/2"		164	155	147	139	130	119	105	86	72	30	
4SR4/35	3	4	/	7.2	1 1/4"/1 1/2"/2"		226	216	211	198	188	175	162	137	108	46	
4SR4/46	4	5.5	/	10.8	1 1/4"/1 1/2"/2"		298	285	278	260	248	230	212	180	142	60	
4SR4/60	5.5	7.5	/	12.5	1 1/4"/1 1/2"/2"		388	371	362	339	323	300	277	233	185	78	

Performance

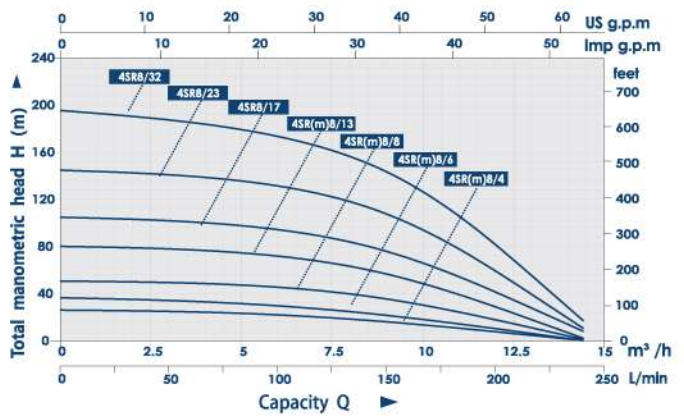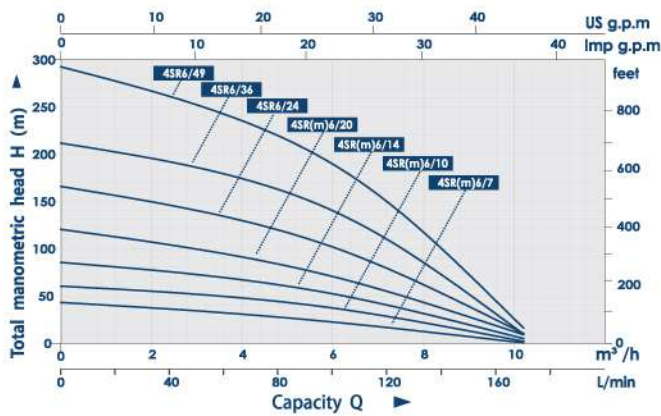

Model	Power		Current(A)		Size Inch	Q(m³/h) Q(L/min)	0	1.2	2.4	3.6	4.8	6	7.2	8.4	9.6
	KW	HP	1~	3~			0	20	40	60	80	100	120	140	160
4SR(m)6/7	0.75	1	5.8	2.8	1½"/2"	H(m)	42	40	37	35	30	27	23	17	6
4SR(m)6/10	1.1	1.5	8.6	3.8	1½"/2"		60	58	54	50	43	39	33	25	9
4SR(m)6/14	1.5	2	10.2	4.8	1½"/2"		84	81	75	70	60	54	46	35	12
4SR(m)6/20	2.2	3	15.2	6	1½"/2"		120	116	108	100	86	78	66	50	18
4SR6/27	3	4	/	7.2	1½"/2"		162	156	145	135	116	105	89	67	24
4SR6/36	4	5.5	/	10.8	1½"/2"		216	208	194	180	154	140	118	90	32
4SR6/49	5.5	7.5	/	12.5	1½"/2"		294	284	264	245	210	191	162	122	44


Model	Power		Current(A)		Size Inch	Q(m³/h) Q(L/min)	0	2.4	3.6	4.8	6	7.2	8.4	9.6	10.8	13.2
	KW	HP	1~	3~			0	40	60	80	100	120	140	160	180	220
4SR(m)8/4	0.75	1	5.8	2.8	2"	H(m)	25	23	22	21	21	20	19	17	17	6
4SR(m)8/6	1.1	1.5	8.6	3.8	2"		37	34	33	32	32	31	28	26	25	10
4SR(m)8/8	1.5	2	10.2	4.8	2"		50	45	45	43	43	41	38	35	33	13
4SR(m)8/13	2.2	3	15.2	6	2"		80	75	74	71	69	66	59	52	44	16
4SR8/17	3	4	/	7.2	2"		105	96	96	92	91	87	80	74	71	28
4SR8/23	4	5.5	/	10.8	2"		142	135	132	128	125	120	113	105	83	38
4SR8/32	5.5	7.5	/	12.5	2"		200	180	180	173	171	164	150	139	134	53

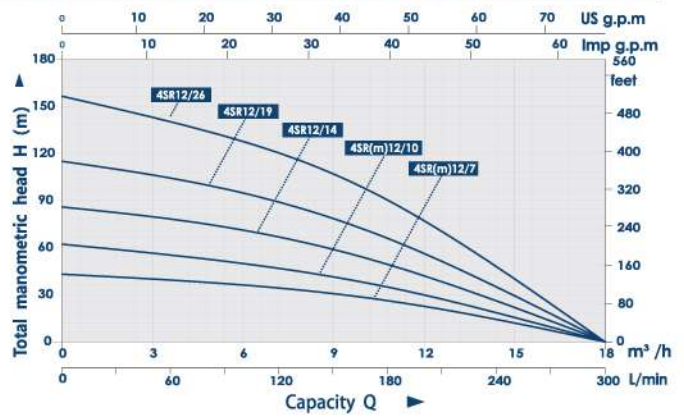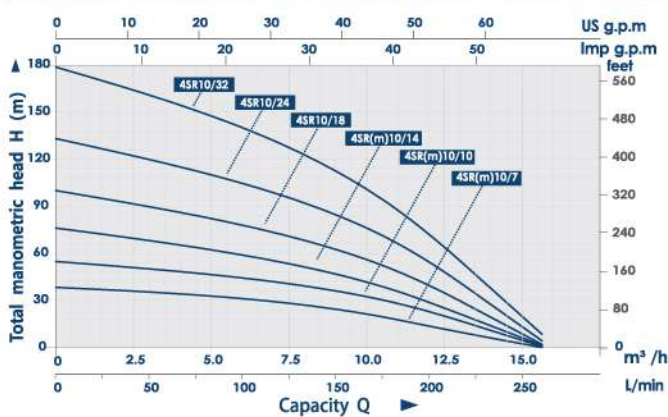

Model	Power		Current(A)		Size Inch	Q(m³/h) Q(L/min)	0	1.8	3.6	5.4	7.2	9	10.8	12.6	14.4
	KW	HP	1~	3~			0	30	60	90	120	150	180	210	240
4SR(m)10/7	1.1	1.5	8.6	3.8	2"	H(m)	39	37	35	32	28	23	19	13	6
4SR(m)10/10	1.5	2	10.2	4.8	2"		56	53	50	46	40	34	28	19	9
4SR(m)10/14	2.2	3	15.2	6	2"		78	74	70	64	56	47	39	26	12
4SR10/18	3	4	/	7.2	2"		100	95	90	82	72	61	50	34	16
4SR10/24	4	5.5	/	10.8	2"		134	127	120	110	96	81	67	45	21
4SR10/32	5.5	7.5	/	12.5	2"		179	169	160	147	128	108	89	60	28


Model	Power		Current(A)		Size Inch	Q(m³/h) Q(L/min)	0	2.4	3.6	4.8	6	7.2	8.4	9.6	10.8	13.2
	KW	HP	1~	3~			0	40	60	80	100	120	140	160	180	220
4SR(m)12/7	1.5	2	10.2	4.8	2"	H(m)	42	41	39	36	32	29	24	19	11	6
4SR(m)12/10	2.2	3	15.2	6	2"		61	59	56	52	47	42	35	28	17	9
4SR12/14	3	4	/	7.2	2"		85	82	78	72	65	58	49	39	23	12
4SR12/19	4	5.5	/	10.8	2"		115	112	106	98	89	79	66	53	32	17
4SR12/26	5.5	7.5	/	12.5	2"		158	153	145	135	122	109	91	72	44	23

Diagram

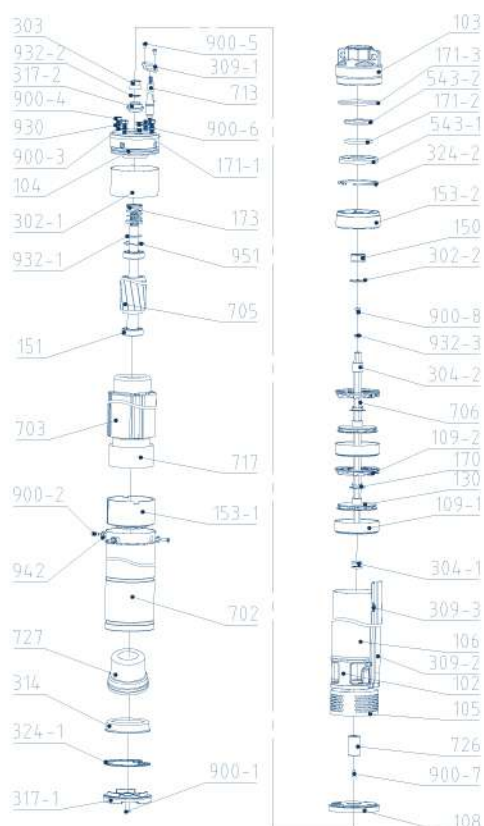


102	Water inlet joint	317-2	Sand control seat
103	Outlet	324-1	Circlip
104	Oil chamber	324-2	Circlip
105	Net cover	543-1	Valve sleeve
106	Pump casing	543-2	Valve deck
108	Oil chamber cover	702	Barrel
109-1	Guide vane	703	Stator core with winding
109-2	Guide vane	705	Rotor
130	Impeller	706	Pump shaft
150	Sliding bearing	713	Cable
151	Deep groove ball bearings	717	Insulating paper
153-1	Lower bearing seat	726	Coupling
153-2	Upper bearing seat	727	Pressure regulating membrane
170	Gasket	900-1	Hexagon headed bolt
171-1	O ring	900-2	Phillips countersunk head screw
171-2	O ring	900-3	Fully threaded socket head screw
172-3	O ring	900-4	Slotted hexagon nut
173	Mechanical seal	900-5	Phillips pan head screw
302-1	Retaining ring	900-6	Vent cock
302-2	Retaining ring	900-7	Phillips countersunk head screw
303	Water throwing ring	900-8	Phillips pan head screw
304-1	Shaft sleeve	930	Spring washer
304-2	Shaft sleeve	932	Flat washer
309-1	Cable pressing plate	932-1	Flat washer
309-2	Cable protector	932-2	Flat washer
309-3	Press plate	942	Dowel pin
314	Bottom cover	951	Wave washer
317-1	Base		

Product Parameters

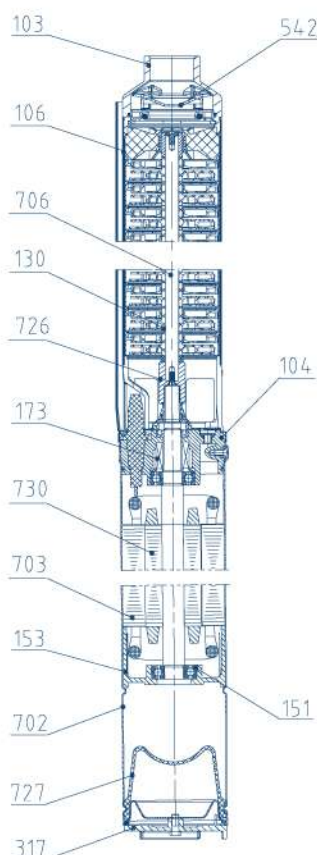

POS.	COMPONENT	CONSTRUCTION CHARACTERISTICS
103	OUTLET	Stainless steel
104	OIL CHAMBER	1. Bearing, skeleton oil seal, mechanical seal carrier 2. Pump body load-bearing carrier 3. Motor sealing carrier
106	PUMP CASING	Stainless steel
130	IMPELLER	Plastic PC
151	BEARING	Deep groove ball bearings
153	LOWER BEARING SEAT	Aluminium
173	MECHANICAL SEAL	Ceramic- graphite or Sic to graphite
317	BASE	Plastic
542	CHECK VALVE	Prevent water impact and sediment backflow
702	MOTOR CASE	Stainless steel
703	STATOR	Stator core with winding
706	PUMP SHAFT	Stainless steel
726	COUPLING	Connect the pump body and motor
727	PRESSURE REGULATING MEMBRANE	Pressure regulating oil bladder, balanced internal and external pressure
730	ROTOR ASSEMBLY	Stainless steel

Product Dimensions

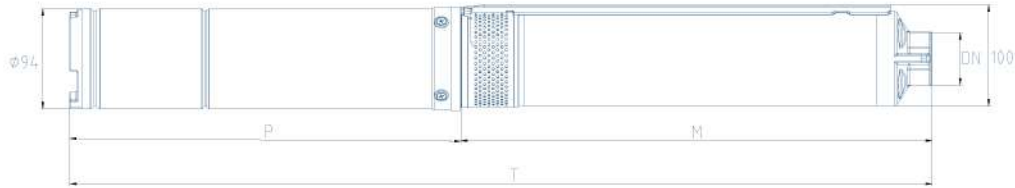

Model	Power (kW)	Dimension(mm)			DN
		M	P	T	
4SRm2/7	0.37	330.3	288.5	618.8	1 1/4"/1 1/2"/2"
4SRm2/10	0.55	350.3	344.5	694.8	1 1/4"/1 1/2"/2"
4SRm2/13	0.75	375.3	400	775.3	1 1/4"/1 1/2"/2"
4SRm2/20	1.1	415.3	530.5	945.8	1 1/4"/1 1/2"/2"
4SRm2/27	1.5	365.3	685.5	1150.8	1 1/4"/1 1/2"/2"
4SRm2/32	2.2	550.3	803.5	1353.8	1 1/4"/1 1/2"/2"
4SR2/7	0.37	330.3	288.5	618.8	1 1/4"/1 1/2"/2"
4SR2/10	0.55	350.3	344.5	694.8	1 1/4"/1 1/2"/2"
4SR2/13	0.75	375.3	400	775.3	1 1/4"/1 1/2"/2"
4SR2/20	1.1	405.3	530.5	935.8	1 1/4"/1 1/2"/2"
4SR2/27	1.5	430.3	685.5	1115.8	1 1/4"/1 1/2"/2"
4SR2/32	2.2	510.3	803.5	1313.8	1 1/4"/1 1/2"/2"
4SRm4/5	0.37	330.3	268.5	598.8	1 1/4"/1 1/2"/2"
4SRm4/7	0.55	350.3	312.5	662.8	1 1/4"/1 1/2"/2"
4SRm4/9	0.75	375.3	356.5	731.8	1 1/4"/1 1/2"/2"
4SRm4/14	1.1	415.3	466.5	881.8	1 1/4"/1 1/2"/2"
4SRm4/18	1.5	465.3	554.5	1019.8	1 1/4"/1 1/2"/2"
4SRm4/26	2.2	550.3	755.5	1305.8	1 1/4"/1 1/2"/2"
4SR4/5	0.37	330.3	268.5	598.8	1 1/4"/1 1/2"/2"
4SR4/7	0.55	350.3	312.5	662.8	1 1/4"/1 1/2"/2"
4SR4/9	0.75	375.3	356.5	731.8	1 1/4"/1 1/2"/2"
4SR4/14	1.1	405.3	466.5	871.8	1 1/4"/1 1/2"/2"
4SR4/18	1.5	430.3	554.5	984.8	1 1/4"/1 1/2"/2"
4SR4/26	2.2	510.3	755.5	1265.8	1 1/4"/1 1/2"/2"
4SR4/35	3	565.3	978.5	1543.8	1 1/4"/1 1/2"/2"
4SR4/46	4	696.5	1251.5	1948	1 1/4"/1 1/2"/2"
4SR4/60	5.5	786.5	1561.5	2348	1 1/4"/1 1/2"/2"
4SRm6/7	0.75	375.3	420	795.3	1 1/2"/2"
4SRm6/10	1.1	415.3	512	927.3	1 1/2"/2"
4SRm6/14	1.5	465.3	634	1099.8	1 1/2"/2"
4SRm6/20	2.2	550.3	857	1407.3	1 1/2"/2"
4SR6/7	0.75	375.3	420	795.3	1 1/2"/2"
4SR6/10	1.1	405.3	512	917.3	1 1/2"/2"
4SR6/14	1.5	430.3	634	1064.8	1 1/2"/2"
4SR6/20	2.2	510.3	857	1367.3	1 1/2"/2"
4SR6/27	3	565.3	1110	1675.63	1 1/2"/2"
4SR6/36	4	696.5	1424	2121	1 1/2"/2"
4SR6/49	5.5	786.5	1862	2648	1 1/2"/2"

Model	Power (kW)	Dimension(mm)			DN
		M	P	T	
4SRm8/4	0.75	375.3	327.5	702.8	2"
4SRm8/6	1.1	415.3	389	804.3	2"
4SRm8/8	1.5	455.3	450.5	905.8	2"
4SRm8/13	2.2	550.3	605	1155.8	2"
4SR8/4	0.75	375.3	327.5	702.8	2"
4SR8/6	1.1	405.3	389	794.3	2"
4SR8/8	1.5	430.3	450.5	888.8	2"
4SR8/13	2.2	510.3	605	1115.3	2"
4SR8/17	3	565.3	766	1331.3	2"
4SR8/23	4	696.5	950.5	1647	2"
4SR8/32	5.5	786.5	1265.5	2052	2"
4SRm10/7	1.1	415.3	570.5	985.8	2"
4SRm10/10	1.5	455.3	727	1182.3	2"
4SRm10/14	2.2	550.3	974	1524.3	2"
4SR10/7	1.1	405.3	570.5	975.8	2"
4SR10/10	1.5	430.3	727	1157.3	2"
4SR10/14	2.2	510.3	974	1484.3	2"
4SR10/18	3	565.3	1183	1748.3	2"
4SR10/24	4	696.5	1496	2192.5	2"
4SR10/32	5.5	786.5	1952	1952	2"
4SRm12/7	1.5	455.3	570.5	1025.8	2"
4SRm12/10	2.2	550.3	727	1277.3	2"
4SR12/7	1.5	430.3	570.5	1000.8	2"
4SR12/10	2.2	510.3	727	1237.3	2"
4SR12/14	3	565.3	974	1539.3	2"
4SR12/19	4	696.5	1235	1931.5	2"
4SR12/26	5.5	786.5	1639	2425.5	2"

QDX Submersible Pump

Capacity up to 117 L/h(7 m³/h)

Head up to 34 m

Application Limits

Maximum operating depth 5m below water level

Liquid temperature+35°C

Ambient temperature up to+40°C

The maximum diameter of particles that can pass through:=2mm



Installation & Use

These submersible pumps, made from heavy duty cast iron, offering exceptional sturdiness, abrasion resistance and durability, are suitable for pumping clear or slightly dirty water.

They distinguish themselves for their sturdiness and reliability under automatic operating conditions in fixed installations. As portable electric drainage and irrigation devices, QDX series submersible pumps with lower water input are widely suitable for water cluster boxes, farmlands, industrial and mining enterprises, construction sites, ships and homes. They are characterized by less volume, light weight and convenient operation etc. If the pump has a float switch, it is possible to achieve the automatic control. Single phase capacitor running asynchronous or 3ph asynchronous motor is equipped in this pump and installed with a built-in thermal protector, which can be automatically cut off in the case of overheat or over current, thus assures safe and reliable running under worse circumstances.

Construction

Pump Body: Aluminum and cast iron

Impeller: Aluminum

Motor Shaft: stainless steel


Mechanical Seal: Ceramic - graphite, ceramic - ceramic

Electric Motor: QDX single-phase 220-240V/50Hz with thermal overload protector built into the copper winding;

Insulation:Class B.

Protection:IP X8


Performance

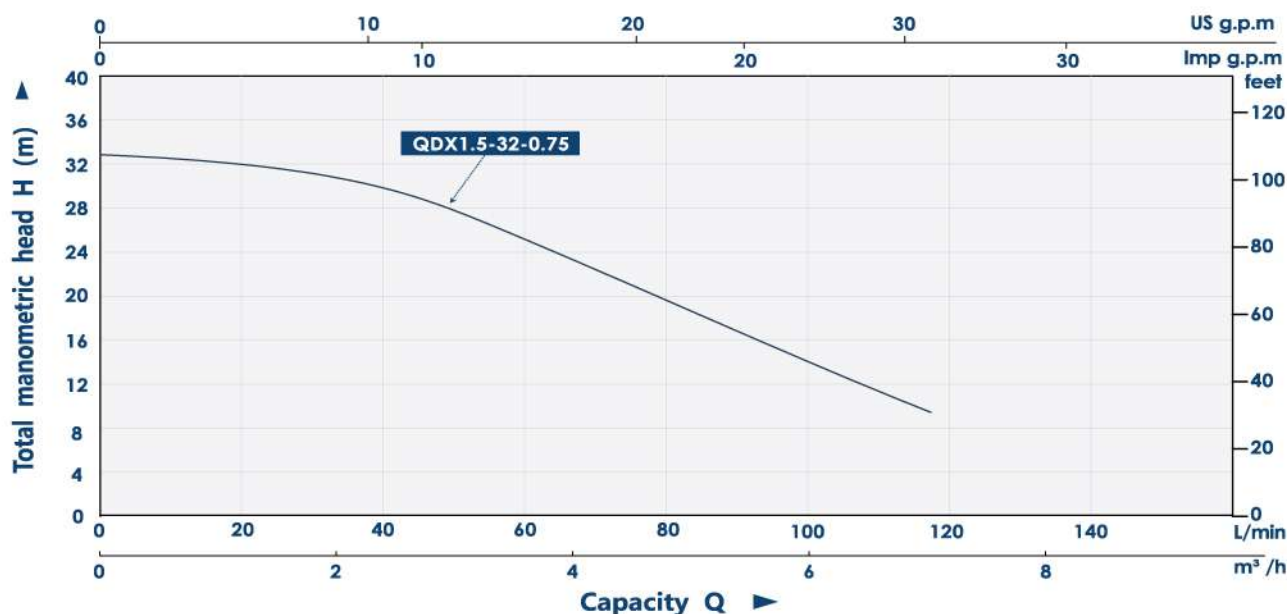

Model	Power		Current A	Size Inch	Max. Diameter of Particle mm	Q(m³/h)										
	KW	HP					Q(L/min)	0	1	2	3	4	5	6	7	
QDX1.5-32-0.75	0.75	1	5.2	1"	2	H(m)	34	32	31	28.5	26	24	20	16		


Submersible Pump

Diagram

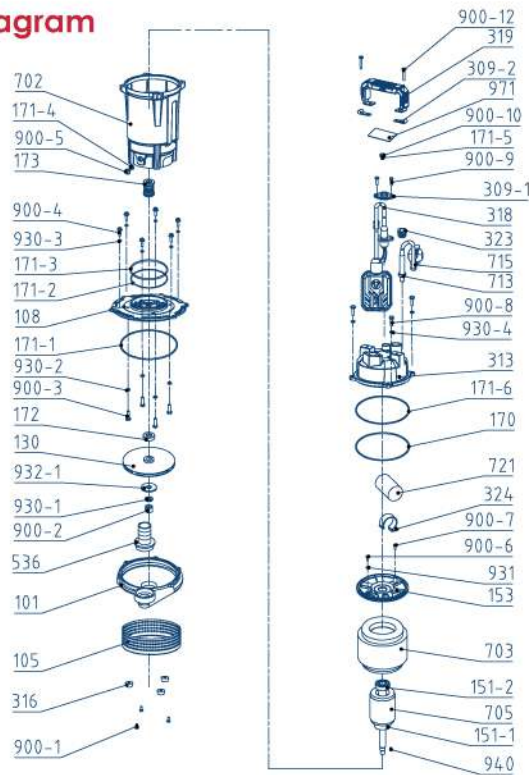


101	Pump body	703	Stator core with winding
105	Net cover	705	Rotor
108	Oil chamber cover	713	Cable
130	Impeller	715	Cable sheath
151-1	Deep groove ball bearings	721	Capacitor
151-2	Deep groove ball bearings	900-1	Phillips pan head screw
153	Upper bearing seat	900-2	Lock nut
170	Rubber gasket	900-3	Hexagon headed bolt
171-1	O ring	900-4	Hexagon headed bolt
171-2	O ring	900-5	Vent cock
171-3	O ring	900-6	Phillips pan head screw
171-4	O ring	900-7	Phillips pan head screw
171-5	O ring	900-8	Hexagon headed bolt
171-6	O ring	900-9	Hexagon headed bolt
172	Skeleton oil seal	900-10	Vent cock
173	Mechanical seal	900-11	Nylon rivet
309-1	Cable pressing plate	900-12	Phillips pan head screw
309-1	Press plate	930-1	Spring washer
313	Top cover	930-2	Spring washer
316	Foot	930-3	Spring washer
318	Float switch	930-4	Spring washer
319	Handle	931	External tooth lock washer
323	Cable gland	932	Flat washer
324	Capacitor clamp	940	Key
536	Outlet section	971	Nameplate
702	Barrel		

Product Parameters

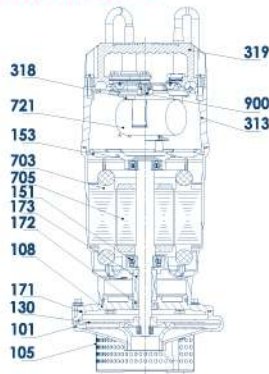

POS.	COMPONENT	CONSTRUCTION CHARACTERISTICS
101	PUMP BODY	Aluminum
105	NET COVER	Stainless steel
108	OIL CHAMBER COVER	Aluminum
130	IMPELLER	Aluminum
151	BEARING	6202 -2RZ
153	LOWER BEARING SEAT	Aluminum
171	O-RING	Rubber NBR
172	SKELETON OIL SEAL	Rubber NBR
173	MECHANICAL SEAL	Ceramic - graphite
313	TOP COVER	Aluminum
318	FLOAT SWITCH	Water pump level protector
319	HANDLE	PVC
703	STATOR	Stator core with winding
705	ROTOR	Stainless steel
721	CAPACITOR	Electronic device
900	VENT COCK	Stainless steel

Product Dimensions

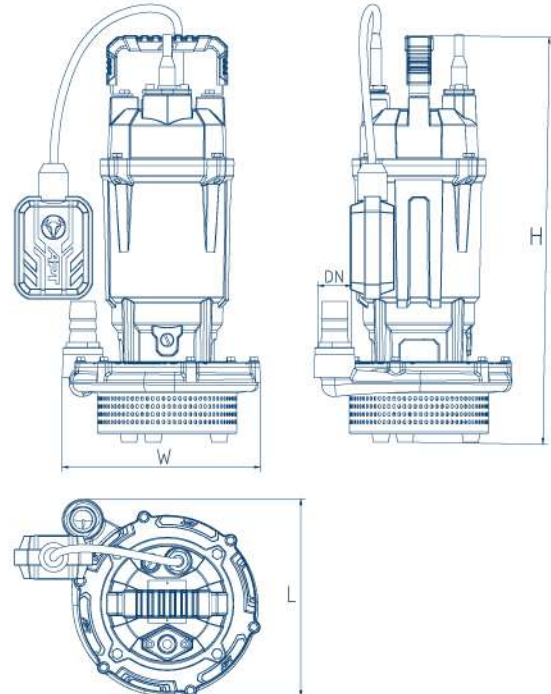

Model	DN	L(mm)	W(mm)	H(mm)
QDX1.5-32-0.75	1"	236	196	415

QDX

Submersible Pump

Capacity up to 2167 L/h(130 m³/h)

Head up to 63.5 m

Application Limits

Maximum immersion depth: 5 m

Liquid temperature: + 40 °C

Ambient temperature: + 40 °C



Installation & Use

These submersible pumps, made from heavy duty cast iron, offering exceptional sturdiness, abrasion resistance and durability, are suitable for pumping clear or slightly dirty water.

They distinguish themselves for their sturdiness and reliability under automatic operating conditions in fixed installations. As portable electric drainage and irrigation devices, QDX series submersible pumps with lower water input are widely suitable for water cluster boxes, farmlands, industrial and mining enterprises, construction sites, ships and homes. They are characterized by less volume, light weight and convenient operation etc. If the pump has a float switch, it is possible to achieve the automatic control.

Construction

Pump Body: Aluminum and cast iron

Impeller: Aluminum or Cast iron

Motor Shaft: stainless steel



Mechanical Seal: Ceramic - graphite, ceramic - ceramic

Electric Motor: QDX single-phase 220-240V/50Hz with thermal overload protector built into the copper winding;

Insulation: Class B.

Protection: IP X8




Performance

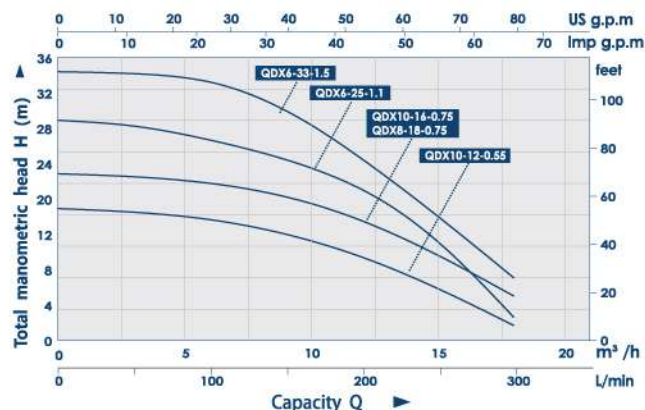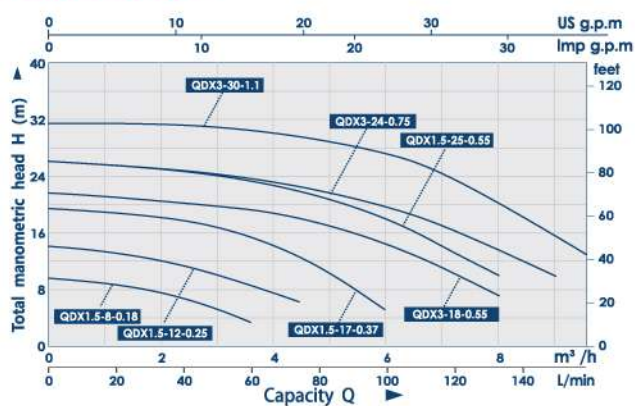

Model	Power		Current	Size	Q(m³/h)	0	1	2	2.5	3	4	5	6	7
	KW	HP	A	Inch	Q(L/min)	0	17	33	42	50	67	83	100	117
QDX1.5-8-0.18	0.18	0.23	1	1"	H(m)	9	8.5	8	6.5	4				
QDX1.5-12-0.25	0.25	0.34	2.1	1"		14	13.5	13	12.5	10.5	8.5			
QDX1.5-17-0.37	0.37	0.5	3.1	1"		19.5	19	18.5	18	17	14	11.5		
QDX1.5-25-0.55	0.55	0.75	4.1	1"		26	25.5	25	24.5	24	22.5	20.5	17	12.5
QDX3-30-1.1	1.1	1.5	7.3	1"		31	30.5	30	30	30	29.5	28.5	27	25
QDX3-18-0.55	0.55	0.75	4.1	1.25"		21.5	21	20.5	20	19.5	18.5	17	14.5	11
QDX3-24-0.75	0.75	1	5.2	1.25"		26	26	25.5	25	24.5	24	21.5	19.5	16.5

Model	Power		Current	Size	Q(m³/h)	0	2	4	6	8	10	12	14	16	18
	KW	HP	A	Inch	Q(L/min)	0	33	67	100	133	167	200	233	267	300
QDX6-25-1.1	1.1	1.5	7.3	1.5"	H(m)	28	27	26	25	23.5	22	19	15.5	9.5	3
QDX6-33-1.5	1.5	2	11.3	1.5"		33.5	33.5	33	33	28.5	25	23	19.5	14.5	8
QDX10-12-0.55	0.55	0.75	4.1	1.5"		16.5	16	16	15.5	14.5	12.5	10.5	7	5	2
QDX8-18-0.75	0.75	1	5.2	1.5"		21	21	20.5	20	19	17.5	15.5	13	10	6
QDX10-16-0.75	0.75	1	5.2	2"		21	21	20.5	20	19	17.5	15.5	13	10	6

Performance

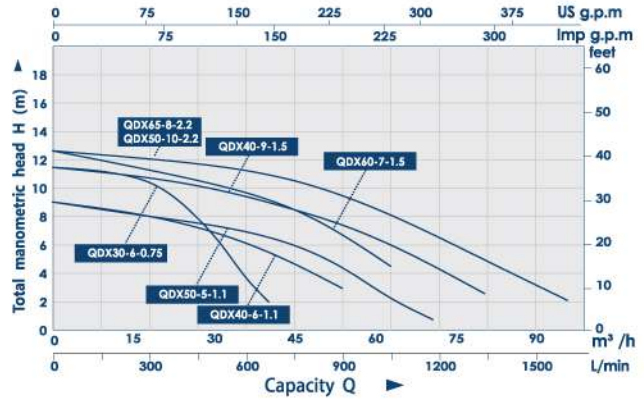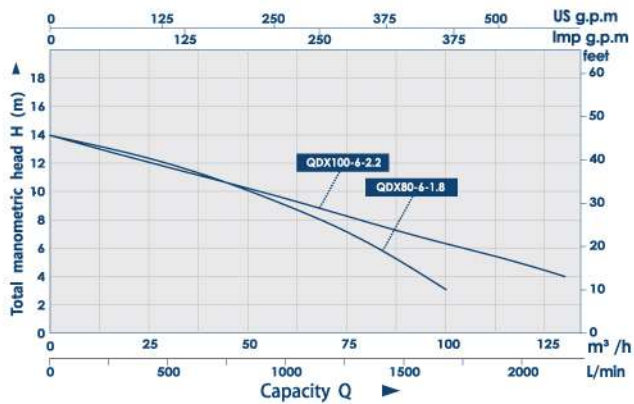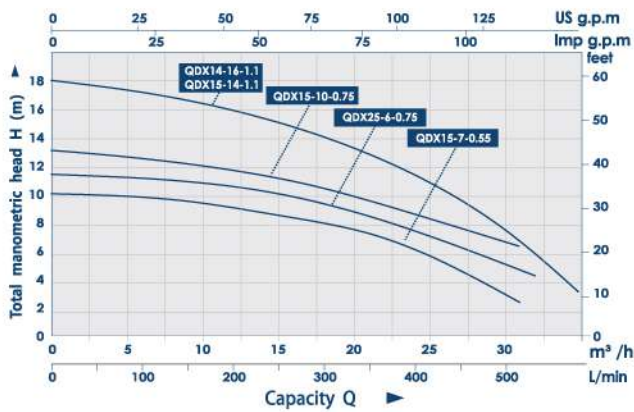


Model	Power		Current	Size	Q(m³/h)	0	5	10	15	20	25	30	35
	KW	HP				A	Inch	Q(L/min)	0	83	167	250	333
QDX15-7-0.55	0.55	0.75	4.1	2"	H(m)	10	9.5	9.5	8.5	7.5	5.5	3	
QDX14-16-1.1	1.1	1.5	7.3	2"		18	17	16.5	15	13	10.5	7.5	
QDX15-10-0.75	0.75	1	5.2	2.5"		13	12.5	12	11	10.5	8.5	6.5	
QDX15-14-1.1	1.1	1.5	7.3	2.5"		18	17	16.5	15	13	10.5	7.5	
QDX25-6-0.75	0.75	1	5.2	3"		11.5	11	11	10	9	7	5	
QDX30-6-0.75	0.75	1	5.2	3"		11.5	11.5	11	11	10.5	8	6.5	3.5

Model	Power		Current	Size	Q(m³/h)	0	10	20	30	40	50	60	70	80
	KW	HP				A	Inch	Q(L/min)	0	167	333	500	667	833
QDX40-6-1.1	1.1	1.5	7.3	3"	H(m)	9	8	8	7	6	4			
QDX40-9-1.5	1.5	2	11.3	3"		12.5	12	11.5	11	9.5	7	4.5		
QDX50-5-1.1	1.1	1.5	8.5	4"		9	8.5	8	7.5	6.5	5	2.5		
QDX60-7-1.5	1.5	2	11.3	4"		11.5	11	10.5	10	9	8	7	14.5	
QDX50-10-2.2	2.2	3	11.9	4"		12.5	12	11.5	11.5	11	10	8.5	7	5
QDX65-8-2.2	2.2	3	11.9	4"		12.5	12	11.5	11.5	11	10	8.5	7	5


Model	Power		Current	Size	Q(m³/h)	0	20	40	60	80	100	120
	KW	HP				A	Inch	Q(L/min)	0	333	667	1000
QDX80-6-2.2	2.2	3	13.2	6"	H(m)	14	12.5	11	9	6.5		
QDX100-6-3	3	4	15.9	8"		14	12	10.5	9.5	7.5	6	5

Diagram

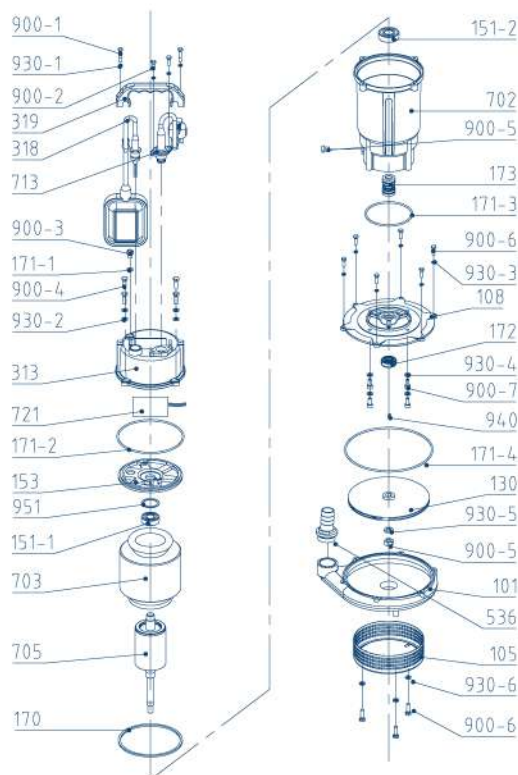


101	Pump body	900-5	Hexagon headed bolt
105	Filter	900-6	Hexagon headed bolt
108	Oil chamber cover	900-6	Hexagon headed bolt
130	Impeller	900-7	Column head screw
151-1	Deep groove ball bearings	930-1	Spring washer
151-2	Deep groove ball bearings	930-2	Spring washer
153	Upper bearing seat	930-3	Spring washer
170	Gasket	930-4	Spring washer
171-1	O ring	930-5	Spring washer
171-2	O ring	930-6	Spring washer
171-3	O ring	940	Key
171-4	O ring	951	Wave washer
172	Skeleton oil seal		
173	Mechanical seal		
313	Top cover		
318	Float switch		
319	Handle		
536	Outlet section		
702	Barrel		
703	Stator core with winding		
705	Rotor		
713	Cable		
721	Run capacitor		
900-1	Hexagon headed bolt		
900-2	Hexagon headed bolt		
900-3	Slotted Cylinder Head Screw		
900-4	Hexagon headed bolt		
900-5	Slotted Cylinder Head Screw		

Product Parameters

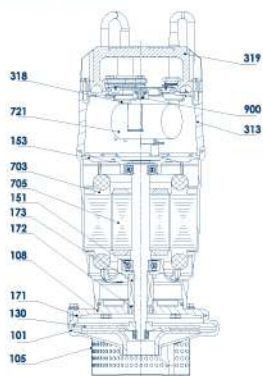


POS.	COMPONENT	CONSTRUCTION CHARACTERISTICS
101	PUMP BODY	Aluminum
105	NET COVER	Stainless steel
108	OIL CHAMBER COVER	Aluminum
130	IMPELLER	Aluminum or cast iron
151	BEARING	6202 -2RZ
153	LOWER BEARING SEAT	Aluminum
171	O-RING	Rubber NBR
172	SKELETON OIL SEAL	Rubber NBR
173	MECHANICAL SEAL	Ceramic - graphite
313	TOP COVER	Aluminum
318	FLOAT SWITCH	Water pump level protector
319	HANDLE	PVC
703	STATOR	Stator core with winding
705	ROTOR	Stainless steel
721	CAPACITOR	Electronic device
900	VENT COCK	Stainless steel

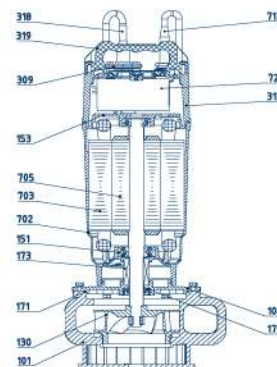

POS.	COMPONENT	CONSTRUCTION CHARACTERISTICS
101	PUMP BODY	Cast iron
108	OIL CHAMBER COVER	Cast iron
130	IMPELLER	Aluminum or cast iron
151	BEARING	Deep groove ball bearing
153	UPPER BEARING SEAT	Cast iron
171	O-RING	Rubber
172	SKELETON OIL SEAL	Dust proof parts of motor
173	MECHANICAL SEAL	Ceramic - graphite
313	TOP COVER	Aluminum
318	FLOAT SWITCH	Water pump level protector
319	HANDLE	ABS plastic
702	MOTOT CASE	Aluminum
703	STATOR	Stator core with winding
705	ROTOR	Stainless steel
713	CABLE	Copper cable
721	CAPACITOR	Electronic device

Product Dimensions

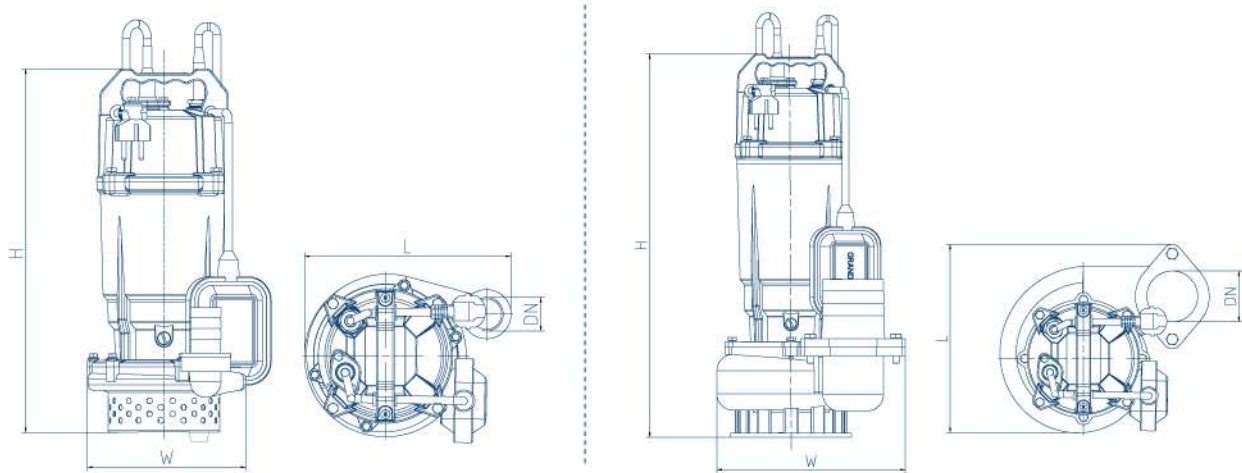

Model	Power	Dimensions(mm)			
Single-phase	kW	L	W	H	DN
QDX1.5-8-0.18	0.18	169	136	322	1"
QDX1.5-12-0.25	0.25	169	136	322	1"
QDX1.5-17-0.37	0.37	175	146	357	1"
QDX1.5-25-0.55	0.55	213	166	374	1"
QDX3-18-0.55	0.55	215	160	375	1.25"
QDX10-12-0.55	0.55	208	150	379	1.5"
QDX15-7-0.55	0.55	218	158	392	2"
QDX3-24-0.75	0.75	213	166	393	1.25"
QDX8-18-0.75	0.75	257	182	397	1.5"
QDX10-16-0.75	0.75	257	182	397	2"
QDX15-10-0.75	0.75	263	195	414	2.5"
QDX25-6-0.75	0.75	243	157	405	3"
QDX30-6-0.75	0.75	243	157	405	3"
QDX3-30-1.1	1.1	250	180	404	1"
QDX6-25-1.1	1.1	255	185	410	1.5"
QDX14-16-1.1	1.1	252	175	411	2"
QDX15-14-1.1	1.1	252	175	411	2.5"
QDX40-6-1.1	1.1	263	202	441	3"
QDX50-5-1.1	1.1	293	263	451	4"
QDX6-33-1.5	1.5	263	202	467	3"
QDX40-9-1.5	1.5	263	202	467	3"
QDX60-7-1.5	1.5	293	263	473	4"
QDX50-10-2.2	2.2	293	263	512	4"
QDX65-8-2.2	2.2	293	263	512	4"
QDX80-6-2.2	2.2	395	276	461	6"
QDX100-6-3	3	425	305	468	8"

GP

Submersible Pump

Capacity up to 267 L/min (16 m³ /h)

Head up to 12 m

Application Limits

Maximum operating depth 5m below water level

Liquid temperature +35°C

Ambient temperature up to +40°C



Installation & Use

These series is suitable for dirty water and liquids that does not contain abrasive particles, and it is for clean water and liquids that does not contain abrasive particles.

As a result of the design solutions that have been adopted, such as the complete cooling of the motor and the shaft with double seal, these pumps are easy to use and reliable.

Drainage pump for emptying pits and cisterns, for gardening: completely constructed in anti-corrosive material.

Construction

Pump Body: Plastic.

Impeller: Plastic.

Motor Shaft: stainless steel


Mechanical Seal: Ceramic-graphite.

Electric Motor: Single-phase with condenser and thermal overload protector built into the copper winding.

Insulation: Class B.

Protection: IP X8


Performance

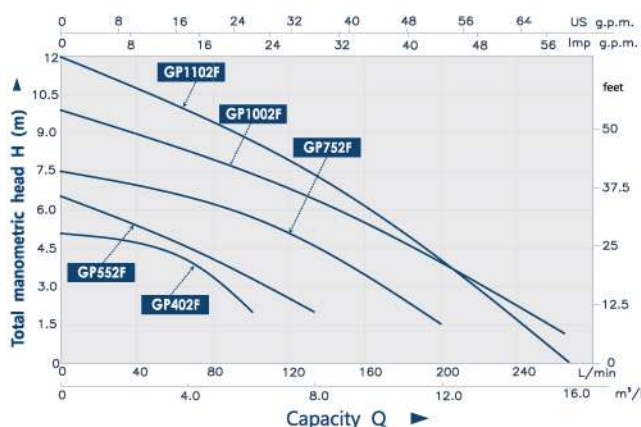

Model	Power		Current	Size	Q(m ³ /h)	Capacity Q (L/min)							
	KW	HP				0	2	4	6	8	10	12	14
GP402F	0.4	0.55	1.74	1" / 1 1/4" / 1 1/2"	H(m)	0	33	67	100	133	167	200	233
GP552F	0.55	0.75	2.4	1" / 1 1/4" / 1 1/2"		5	4.2	3.8	2	-	-	-	-
GP752F	0.75	1	3.3	1" / 1 1/4" / 1 1/2"		6.5	5.8	4.5	4.5	2	-	-	-
GP1002F	0.9	1.2	3.9	1" / 1 1/4" / 1 1/2"		7.5	7	6.6	5.7	5	3.4	1.5	-
GP1102F	1.1	1.5	4.8	1" / 1 1/4" / 1 1/2"		10	8.7	8	7.2	6.5	5.8	5	2.6
GP203F	0.2	0.27	0.86	1" / 1 1/4" / 1 1/2"		11	10.5	9.5	8.5	7.2	6	4	1.5
GP253F	0.25	0.34	1	1" / 1 1/4" / 1 1/2"		5	4	2	-	-	-	-	-
GP353F	0.35	0.47	1.5	1" / 1 1/4" / 1 1/2"		5.5	5	4	2	-	-	-	-
GP403F	0.4	0.55	1.8	1" / 1 1/4" / 1 1/2"		6.5	5.7	4.7	2.5	2	-	-	-
GP503F	0.5	0.7	2.17	1" / 1 1/4" / 1 1/2"		7.5	6.5	5.4	4	2.5	-	-	-
GP553F	0.55	0.75	2.5	1" / 1 1/4" / 1 1/2"		8	7.3	6.6	5.8	4.5	2	-	-
GP753F	0.75	1	3.4	1" / 1 1/4" / 1 1/2"		8	7.3	6.8	6.1	4.8	3	2	-
GP903F	0.9	1.2	3.9	1" / 1 1/4" / 1 1/2"		8.5	8.1	7.7	6.8	5.8	4.8	3	1.5
						9.5	9.2	8.7	8	7.2	6	4.8	2

Submersible Pump

Diagram

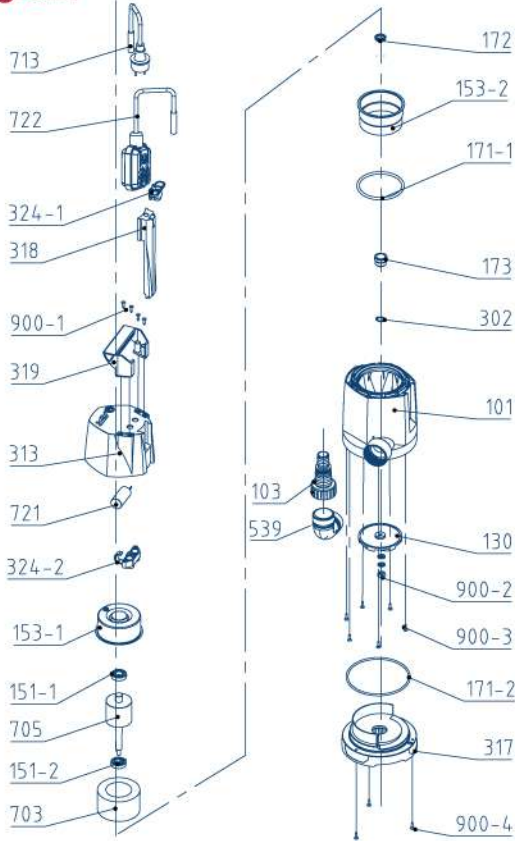

101 Pump body

103 Outlet

130 Impeller

151-1 Deep groove ball bearings

151-2 Deep groove ball bearings

153-1 Upper bearing seat

153-2 Upper bearing seat

171-1 O ring

171-2 O ring

172 Skeleton oil seal

173 Mechanical seal

302 Retaining ring

313 Top cover

317 Base

318 Switch side cover

319 Handle

324-1 Cable clamp

324-2 Capacitor clamp

539 Elbow

703 Stator core with winding

705 Rotor

713 Cable

721 Capacitor

722 Level switch


900-1 Phillips pan head tapping screw

900-2 Slotted hexagon nut


900-3 Phillips pan head tapping screw

900-4 Phillips pan head tapping screw

Product Parameters

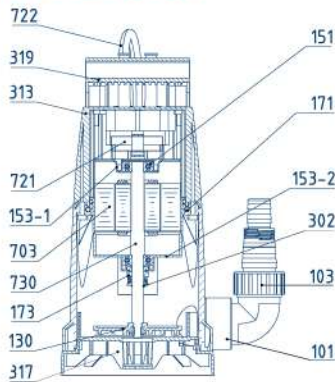

Product Dimensions

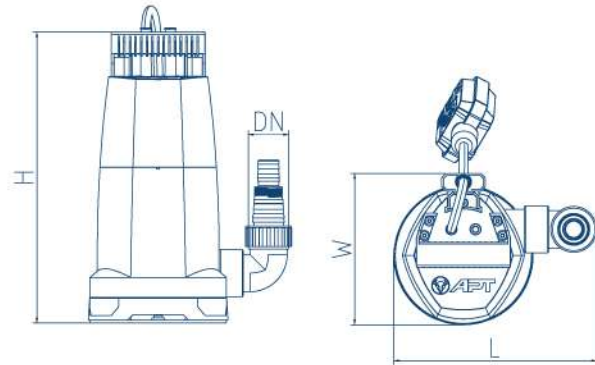

POS.	COMPONENT	CONSTRUCTION CHARACTERISTICS
101	PUMP BODY	Plastic PP
103	OUTLET	Plastic PP
130	IMPELLER	Plastic PA+GF20
151	BEARING	6201
153-1	UPPER BEARING SEAT	Carbon steel
153-2	LOWER BEARING SEAT	Carbon steel
171	O-RING	Rubber NBR
173	MECHANICAL SEAL	Ceramic - graphite
302	RETAINING RING	Stainless steel
313	TOP COVER	Plastic PP
317	BASE	Plastic PP
318	FLOAT SWITCH	Water pump level protector
319	HANDLE	Plastic PP
703	STATOR	Stator core with winding
721	CAPACITOR	Electronic device
730	ROTOR	Stainless steel

Model	DN1	L(mm)	W(mm)	H(mm)
GP402F	1" / 1 1/4" / 1 1/2"	234	175	367
GP552F	1" / 1 1/4" / 1 1/2"	234	175	367
GP752F	1" / 1 1/4" / 1 1/2"	234	175	367
GP1002F	1" / 1 1/4" / 1 1/2"	234	175	367
GP1102F	1" / 1 1/4" / 1 1/2"	234	175	367
GP203F	1" / 1 1/4" / 1 1/2"	234	175	336
GP253F	1" / 1 1/4" / 1 1/2"	234	175	336
GP353F	1" / 1 1/4" / 1 1/2"	234	175	336
GP403F	1" / 1 1/4" / 1 1/2"	234	175	336
GP503F	1" / 1 1/4" / 1 1/2"	234	175	336
GP553F	1" / 1 1/4" / 1 1/2"	234	175	336
GP753F	1" / 1 1/4" / 1 1/2"	234	175	336
GP903F	1" / 1 1/4" / 1 1/2"	234	175	336

GPE

Submersible Pump

Capacity up to 233 L/min (14 m³ /h)

Head up to 9 m

Application Limits

Maximum operating depth 5m below water level

Liquid temperature +35°C

Ambient temperature up to +40°C



Installation & Use

These series is suitable for dirty water and liquids that does not contain abrasive particles, and it is for clean water and liquids that does not contain abrasive particles.

As a result of the design solutions that have been adopted, such as the complete cooling of the motor and the shaft with double seal, these pumps are easy to use and reliable.

Drainage pump for emptying pits and cisterns, for gardening: completely constructed in anti-corrosive material.

Construction

Pump Body: Plastic.

Impeller: Plastic.

Motor Shaft: stainless steel



Mechanical Seal: Ceramic-graphite.

Electric Motor: Single-phase with condenser and thermal overload protector built into the copper winding.

Insulation: Class B.

Protection: IP X8


Performance

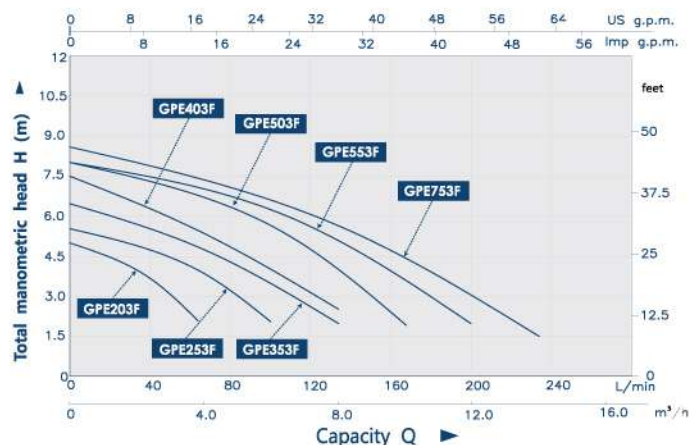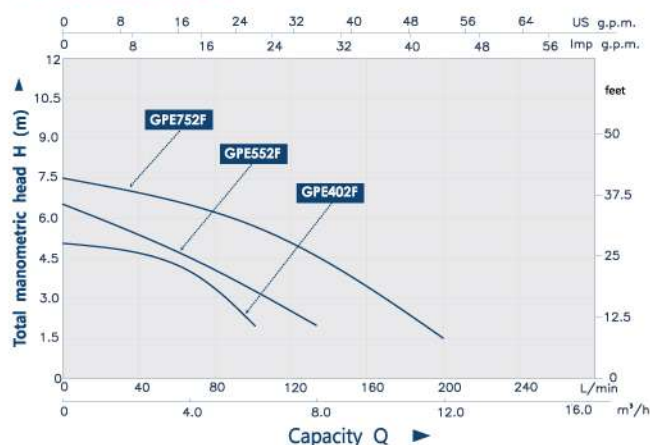

Model	Power		Current	Size	Q(m ³ /h)	Capacity Q (L/min)							
	KW	HP				0	2	4	6	8	10	12	14
GPE402F	0.4	0.55	1.74	1" / 1 1/4" / 1 1/2"	H(m)	0	33	67	100	133	167	200	233
GPE552F	0.55	0.75	2.4	1" / 1 1/4" / 1 1/2"		5	4.2	3.8	2	-	-	-	-
GPE752F	0.75	1	3.3	1" / 1 1/4" / 1 1/2"		6.5	5.8	4.5	4.5	2	-	-	-
GPE203F	0.2	0.27	0.86	1" / 1 1/4" / 1 1/2"		7.5	7	6.6	5.7	5	3.4	1.5	-
GPE253F	0.25	0.34	1	1" / 1 1/4" / 1 1/2"		5	4	2	-	-	-	-	-
GPE353F	0.35	0.47	1.5	1" / 1 1/4" / 1 1/2"		5.5	5	4	2	-	-	-	-
GPE403F	0.4	0.55	1.8	1" / 1 1/4" / 1 1/2"		6.5	5.7	4.7	2.5	2	-	-	-
GPE503F	0.5	0.7	2.17	1" / 1 1/4" / 1 1/2"		7.5	6.5	5.4	4	2.5	-	-	-
GPE553F	0.55	0.75	2.5	1" / 1 1/4" / 1 1/2"		8	7.3	6.6	5.8	4.5	2	-	-
GPE753F	0.75	1	3.4	1" / 1 1/4" / 1 1/2"		8.5	7.3	6.8	6.1	4.8	3	2	-
							8.1	7.7	6.8	5.8	4.8	3	1.5


Submersible Pump

Diagram

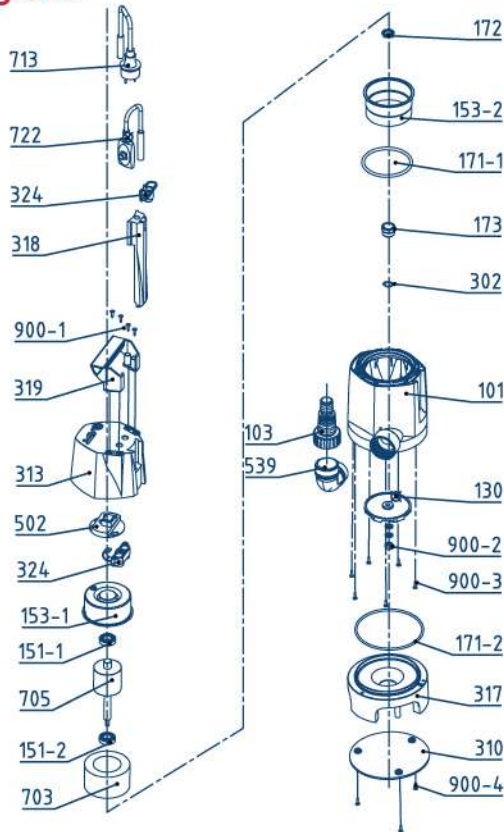


- | | |
|--|--|
| 101 Pump body | 502 Control panel |
| 103 Outlet | 539 Elbow |
| 130 Impeller | 703 Stator core with winding |
| 151-1 Deep groove ball bearings | 705 Rotor |
| 151-2 Deep groove ball bearings | 713 Cable |
| 153-1 Upper bearing seat | 722 Level switch |
| 153-2 Upper bearing seat | 900-1 Phillips pan head tapping screw |
| 171-1 O ring | 900-2 Slotted hexagon nut |
| 171-2 O ring | 900-3 Phillips pan head tapping screw |
| 172 Skeleton oil seal | 900-4 Phillips pan head tapping screw |
| 173 Mechanical seal | |
| 302 Retaining ring | |
| 310 Base plate | |
| 313 Top cover | |
| 317 Base | |
| 318 Switch side cover | |
| 319 Handle | |
| 324 Cable clamp | |
| 324 Capacitor clamp | |

Product Parameters

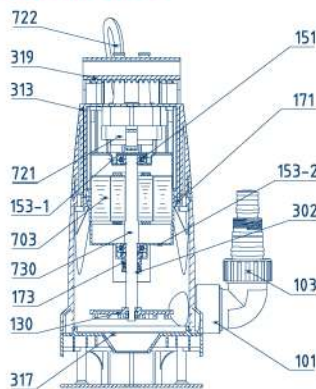

POS.	COMPONENT	CONSTRUCTION CHARACTERISTICS
101	PUMP BODY	Plastic PP
103	OUTLET	Plastic PP
130	IMPELLER	Plastic PA+GF20
151	BEARING	6201
153-1	UPPER BEARING SEAT	Carbon steel
153-2	LOWER BEARING SEAT	Carbon steel
171	O-RING	Rubber NBR
173	MECHANICAL SEAL	Ceramic - graphite
302	RETAINING RING	Stainless steel
313	TOP COVER	Plastic PP
317	BASE	Plastic PP
319	HANDLE	Plastic PP
703	STATOR	Stator core with winding
721	CAPACITOR	Electronic device
722	LEVEL SWITCH	Water pump level protector
730	ROTOR	Stainless steel

Product Dimensions

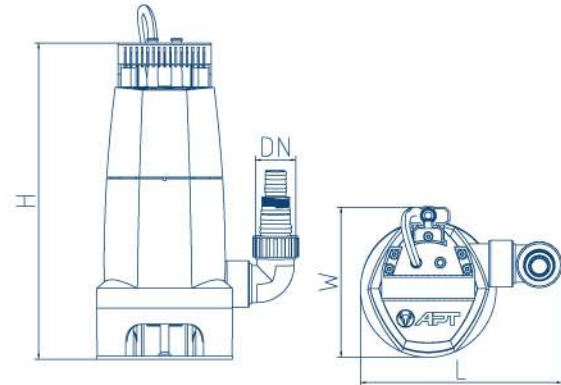

Model	DN1	L(mm)	W(mm)	H(mm)
GPE402F	1" / 1 1/4" / 1 1/2"	234	175	367
GPE552F	1" / 1 1/4" / 1 1/2"	234	175	367
GPE752F	1" / 1 1/4" / 1 1/2"	234	175	367
GPE203F	1" / 1 1/4" / 1 1/2"	234	175	336
GPE253F	1" / 1 1/4" / 1 1/2"	234	175	336
GPE353F	1" / 1 1/4" / 1 1/2"	234	175	336
GPE403F	1" / 1 1/4" / 1 1/2"	234	175	336
GPE503F	1" / 1 1/4" / 1 1/2"	234	175	336
GPE553F	1" / 1 1/4" / 1 1/2"	234	175	336
GPE753F	1" / 1 1/4" / 1 1/2"	234	175	336

GPOP

Submersible Pump

Capacity up to 133 L/h(8 m³/h)

Head up to 6.6 m



Application Limits

Maximum operating depth 5m below water level.

Liquid temperature + 40 °C.

The PH value of the medium is between 6.5-8.5.




Installation & Use

GPOP series is suitable for clean water and liquids that does not contain abrasive particles. The whole is made of engineering PP plastic material, which ensures that the electric pump has stronger corrosion resistance, lighter weight, smaller shape and compact structure while being environmentally friendly and pollution-free.

Construction

Motor: copper wire motor with built-in thermal protector
 Barrel: engineering plastic
 Pump shaft: 304 stainless steel shaft
 Bearing: Deep groove ball bearing 6201RS
 Mechanical seal: 108 series graphite to ceramic
 Impeller: Engineering plastic


Performance

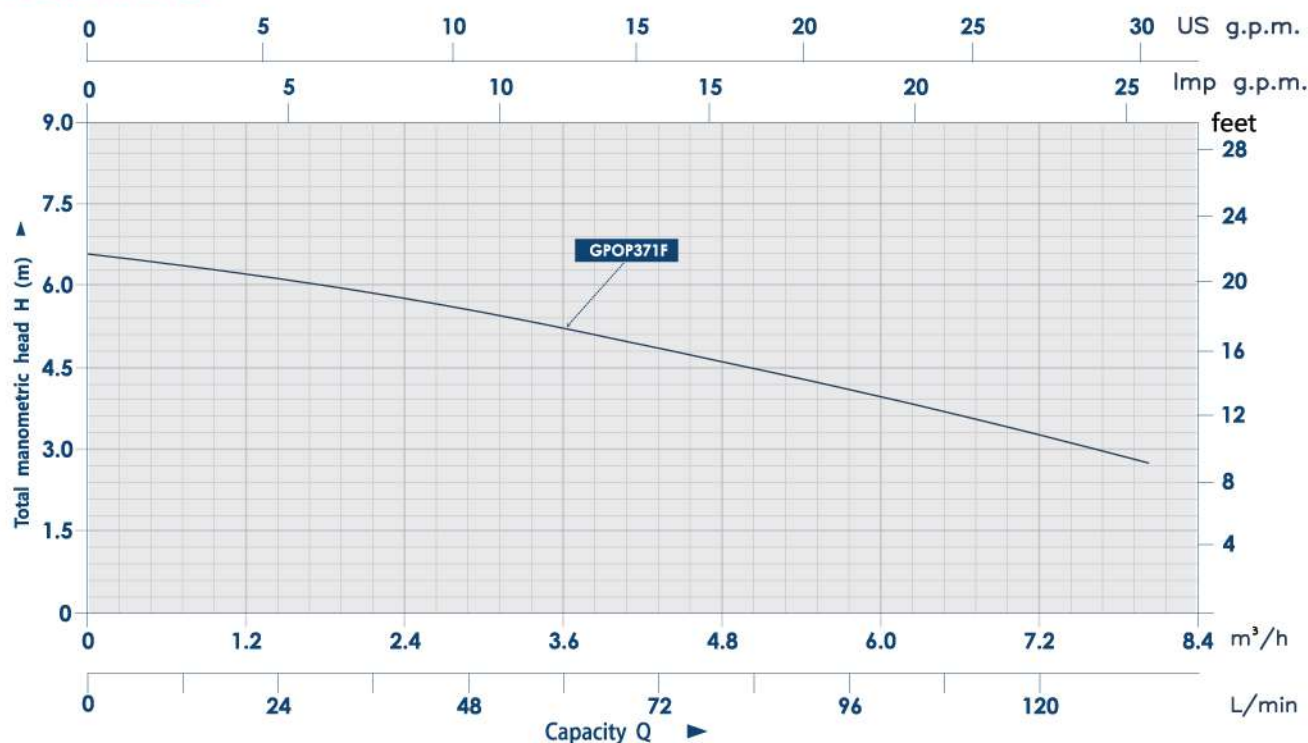

Model	Power		Current	Size	Q(m³/h)	0	1	2	3	4	5	6	7	8
	KW	HP												
GPOP371F	0.37	0.5	2	25	H(m)	6.6	6.2	5.8	5.5	5	4.6	4	3.4	2.8


Submersible Pump

Diagram

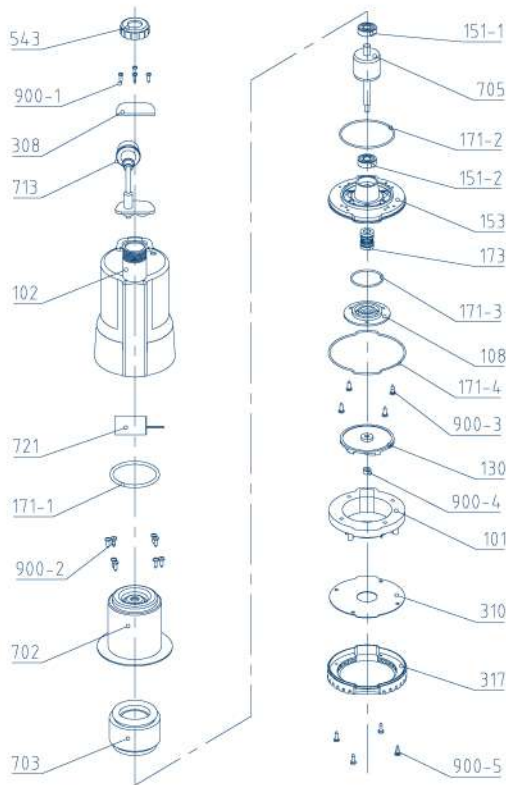


- 101** Pump body
- 102** Casing
- 108** Oil chamber cover
- 130** Impeller
- 151-1** Deep groove ball bearings
- 151-2** Deep groove ball bearings
- 153** Lower bearing seat
- 171-1** O ring
- 171-2** O ring
- 171-3** O ring
- 171-4** O ring
- 173** Mechanical seal
- 308** Cover plate
- 310** Base plate
- 317** Base
- 543** Outlet female threaded valve cover
- 702** Barrel
- 703** Stator core with winding
- 705** Rotor
- 713** Cable
- 721** Run capacitor
- 900-1** Cross pan head tapping screw
- 900-2** Cross pan head tapping screw
- 900-3** Cross pan head tapping screw
- 900-4** Slotted hexagon nut
- 900-5** Cross pan head tapping screw

Product Parameters

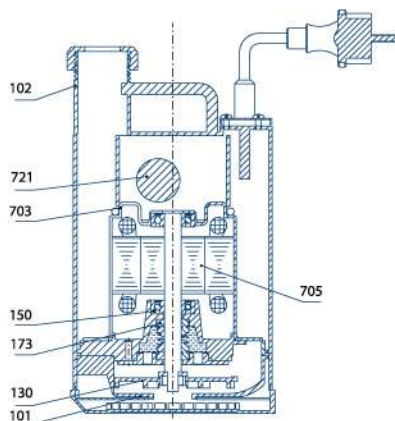

POS.	COMPONENT	CONSTRUCTION CHARACTERISTICS
101	PUMP BODY	Plastic PP
102	CASING	Plastic PP
130	IMPELLER	Plastic
150	BEARING	6201
173	MECHANICAL SEAL	Graphite-ceramic
703	STATOR CPRE	Stator core with winding
705	ROTOR	Stainless steel
721	CAPACITOR	Electronic device

Product Dimensions

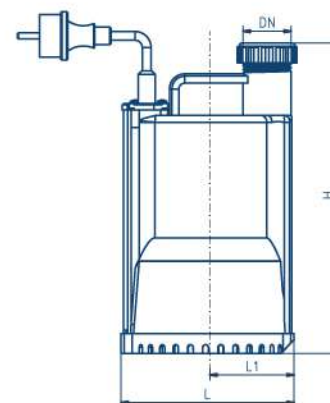

Model	DN1	L(mm)	W(mm)	H(mm)
GPOP371F	1.25"	240	152	80

GV-L

Submersible Sewage Pump

Capacity up to 833 L/h(50 m³/h)

Head up to 19 m

Application Limits

5 m maximum immersion depth

Maximum liquid temperature up to +35°C

Maximum ambient temperature up to +40°C



Installation & Use

This series pump is equipped with a vortex impeller, with strong sewage discharge capacity, suitable for chemical industry, petroleum, pharmaceutical, mining, paper industry, cement plant, steel plant, power plant, coal processing industry, urban sewage treatment plant drainage system, municipal engineering, construction site and other industries. Can pumping sewage containing particles and clean water. With stainless steel casing, also suitable for pumping corrosive media. This pump can pass through the dirt and debris with larger particle diameter, which is suitable for the transportation and discharge of sewage. When pumping sewage, the pump is equipped with a thickened base, which has a large water output and can be used in various sewage systems; When pumping clean water, the filtration is finer and the service life is long.

Construction

Pump Body: Cast iron.

Impeller: Vortex Impeller in cast iron

Motor Bracket: Stainless steel.

Motor Shaft: Stainless steel.



Mechanical Seal: Ceramic-graphite and Sic to graphite.

Electric Motor: Single-phase 220-240V/50Hz with condenser thermal overload protector or current protector built into the copper winding;

Insulation: Class B.

Protection: IP X8.


Performance

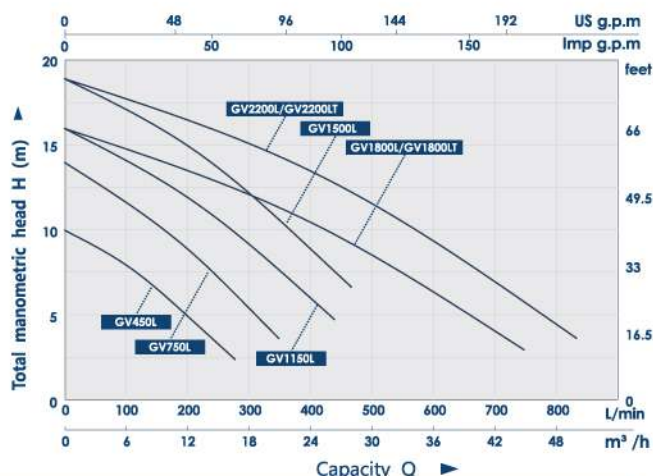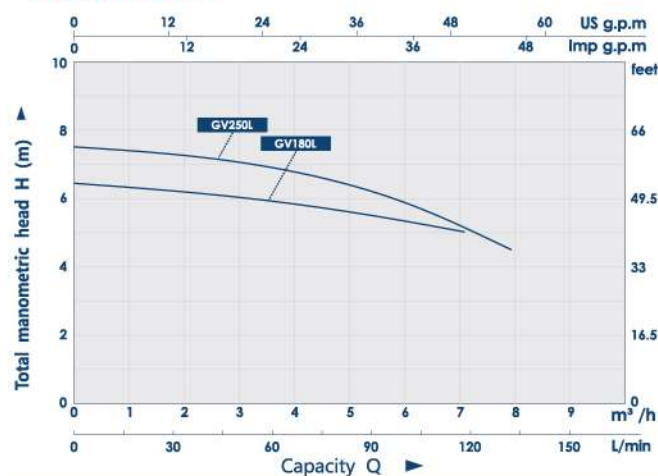

Model	Power		Current	Size	Q(m³/h)	0	1	2	3	4	5	6	7	8
	KW	HP				A	Inch	Q(L/min)	0	17	33	50	67	83
GV180L	0.18	0.25	1.5	1"1/25"/1.5"	H(m)	6.5	6.3	6.1	5.9	5.7	5.4	5.3	5	-
GV250L	0.25	0.35	2.2	1"1/25"/1.5"		7.5	7.3	7.1	6.8	6.5	6.3	5.8	5.4	4.5


Model	Power		Current	Size	Q(m³/h)	0	6	12	18	24	30	36	42	48
	KW	HP				A	Inch	Q(L/min)	0	100	200	300	400	500
GV450L	0.45	0.6	3.8	2"	H(m)	10	8	5	-	-	-	-	-	-
GV750L	0.75	1	6	2"		14	12	9	5.5	-	-	-	-	-
GV1100L	1.1	1.5	7.6	2"		16	14	12	9	6	-	-	-	-
GV1500L	1.5	2	10	2"		19	17	15	13	9	-	-	-	-
GV1800L	1.8	2.5	10	3"		16	15	13.5	12	10.5	8	6	4	-
GV2200L	2.2	3	13.3	3"		19	17.5	16	15	13.5	11.5	9.5	6.5	4.5
GV1800LT	1.8	2.5	4	3"		16	15	13.5	12	10.5	8	5.5	3.5	-
GV2200LT	2.2	3	5.5	3"		19	17.5	16	15	13.5	11.5	9.5	6.5	4.5

Diagram

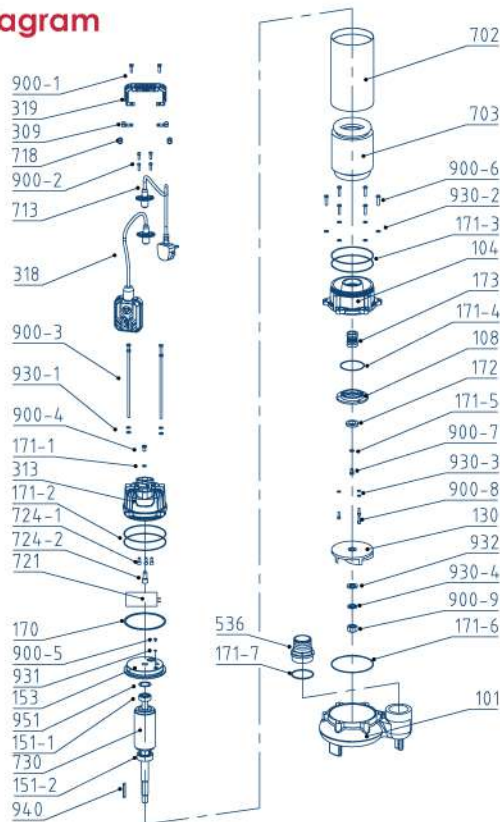


101	Pump body	713	Cable
104	Chamber	718	Cable harness
108	Chamber cover	721	Run Capacitor
130	Impeller	724-1	Terminal Cap
151-1	Deep groove ball bearings	724-2	Terminal Cap
151-2	Deep groove ball bearings	730	Rotor assembly
153	Upper bearing seat	900-1	Hexagon headed bolt
170	Gasket	900-2	Hexagon socket head cap screw
171-1	O ring	900-3	Hexagon headed bolt
171-2	O ring	900-4	Slotted cylinder head screw
171-3	O ring	900-5	Screw
171-4	O ring	900-6	Hexagon headed bolt
171-5	O ring	900-7	Slotted cylinder head screw
171-6	O ring	900-8	Hexagon socket head cap screw
171-7	O ring	900-9	Cap Nut
172	Skeleton oil seal	930-1	Spring washer
173	Mechanical seal	930-2	Spring washer
309	Cable pressing plate	930-3	Spring washer
313	Top cover	930-4	Spring washer
318	Float switch	931	External tooth lock washer
319	Handle	932	Flat washer
536	Outlet section	940	Key
702	Barrel	951	Wave washer
703	Stator core with winding		

Product Parameters

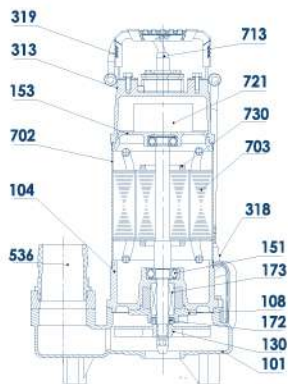

POS.	COMPONENT	CONSTRUCTION CHARACTERISTICS
101	PUMP BODY	HT200
104	OIL CHAMBER	HT200
108	OIL CHAMBER COVER	HT200
130	IMPELLER	HT200
151	BEARING	GCR15
153	UPPER BEARING SEAT	Cast iron
172	SKELETON OIL SEAL	Rubber NBR
173	MECHANICAL SEAL	Ceramic - graphite / Ceramic-Silicon Carbide
313	TOP COVER	HT200
318	FLOAT SWITCH	Water pump level protector
319	HANDLE	SUS201
536	OUTLET	ABS
702	MOTOR CASE	SUS201
703	STATOR	Assemblies
713	CABLE	Assemblies
721	RUN CAPACITOR	Electronic device
730	ROTOR ASSEMBLY	Assemblies

Product Dimensions

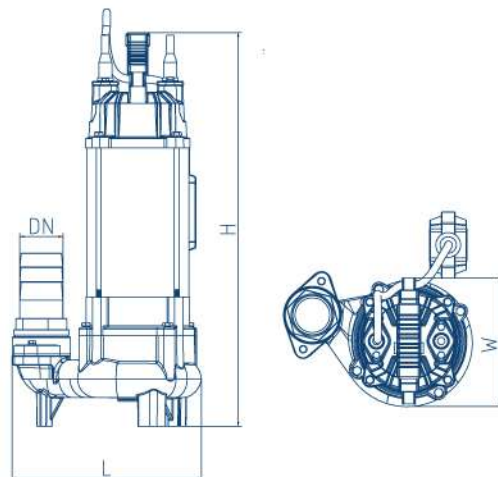

Model	DN	L(mm)	W(mm)	H(mm)
GV180L	1" / 1 1/4" / 1 1/2"	168	120	380
GV250L	1" / 1 1/4" / 1 1/2"	168	120	380
GV450L	2"	228	153	460
GV750L	2"	228	153	475
GV1100L	2"	230	180	492
GV1500L	2"	230	180	507
GV1800L	3"	308	181	577
GV2200L	3"	308	181	577
GV1800LT	3"	308	181	577
GV2200LT	3"	308	181	577

GV-K Drainage Pump

Capacity up to 667 L/min(40m³ /h)

Head up to 15 m

Application Limits

5 m maximum immersion depth

Maximum liquid temperature up to +35°C

Maximum ambient temperature up to +40°C



Installation & Use

These submersible pumps with a cutting system are designed for efficiently handling dirty water in both industrial and civil environments. They feature a robust cast iron impeller equipped with a cutter, ensuring reliable performance. The pumps are equipped with overload protection for enhanced safety and durability. They come highly recommended for various applications, such as pumping wastewater from factories, construction sites, and commercial facilities, as well as for drainage systems in municipal sewage treatment plants. Additionally, they are suitable for use in residential areas, municipal projects, methane pools, and rural field irrigation.

Construction

Pump Body: Cast iron.

Impeller: Cast iron with tungsten steel material cutter

Motor Bracket: Stainless steel.

Motor Shaft: Stainless steel.


Mechanical Seal: Ceramic-graphite

Electric Motor: Single-phase 220-240V/50Hz with condenser thermal overload protector built into the copper winding;

Insulation: Class B.


Protection: IP X8.

Performance

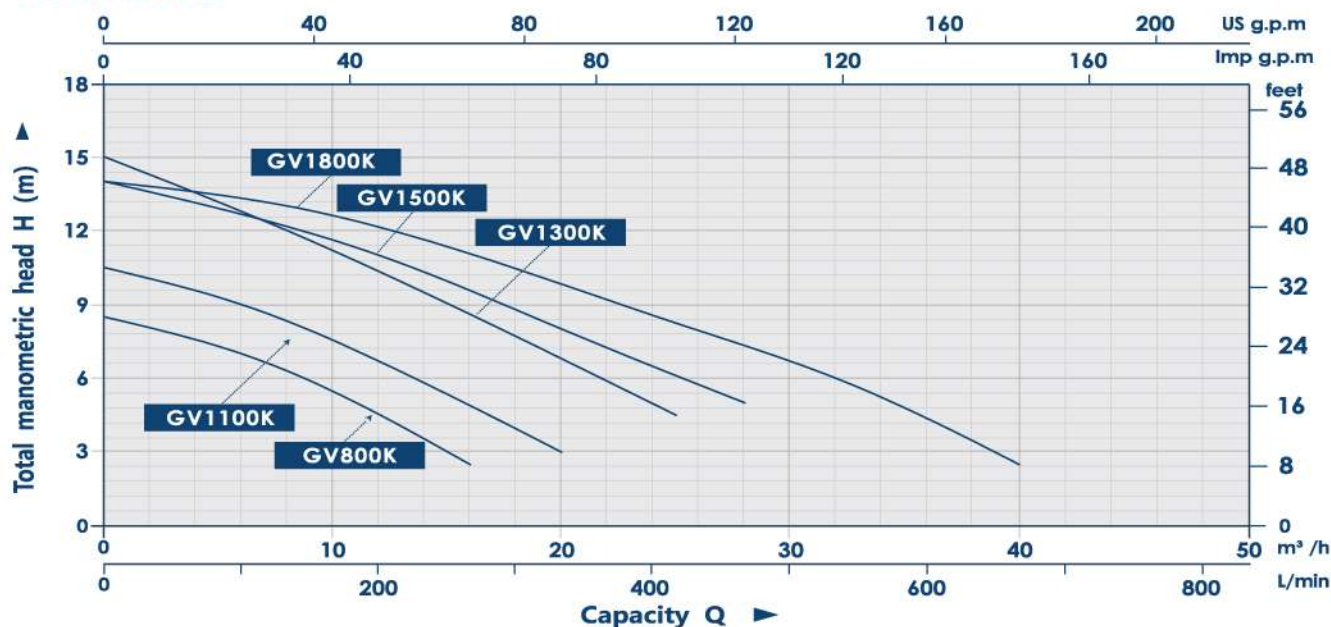


Model	Power		Current	Size	Q(m³/h)	0	4	8	12	16	20	25	28	32	36	40	
	KW	HP	A	mm	Q(L/min)	0	67	133	200	267	333	417	467	533	600	667	
GV800K	0.8	1.1	4.6	50	H(m)	8.5	7.5	6.5	5	2.5	-	-	-	-	-	-	
GV1100K	1.1	1.5	5.1	50		10.5	9.5	8	6.7	5	3	-	-	-	-	-	-
GV1300K	1.3	1.75	7	50		15	13.5	12	10	9	7.5	4.5	-	-	-	-	-
GV1500K	1.5	2	8.5	50		14	13	12	10.5	10	8	6.5	5	-	-	-	-
GV1800K	1.8	2.5	11.4	80		14	13.5	13	12	11.5	9	8	7.5	6	4	2.5	-

Diagram

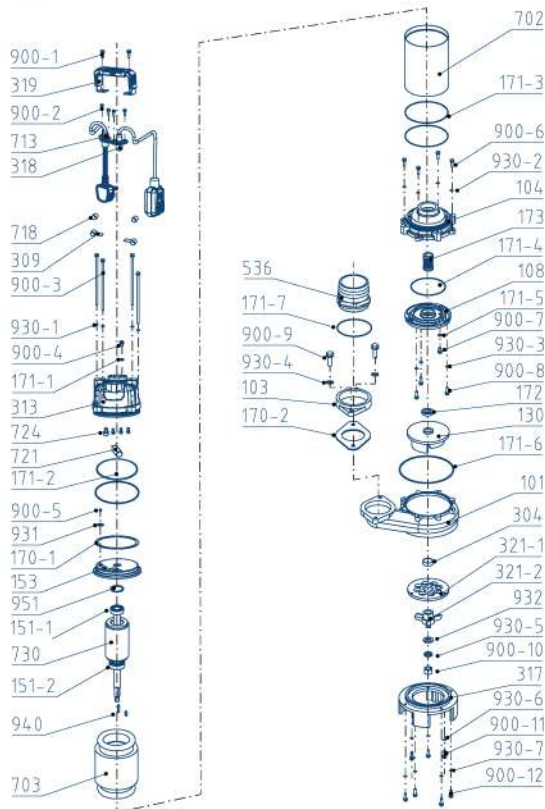


101	Pump body	703	Stator core with winding
103	Outlet	713	Cable
104	Chamber	718	Cable harness
108	Chamber cover	721	Run Capacitor
130	Impeller	724	Terminal Cap
151-1	Deep groove ball bearings	730	Rotor assembly
151-2	Deep groove ball bearings	900-1	Hexagon headed bolt
153	Upper bearing seat	900-2	Hexagon socket head cap screw
170-1	Gasket	900-3	Hexagon headed bolt
170-2	Gasket	900-4	Slotted cylinder head screw
171-1	O ring	900-5	Cross recessed round head screw with washer
171-2	O ring	900-6	Hexagon headed bolt
171-3	O ring	900-7	Slotted cylinder head screw
171-4	O ring	900-8	Hexagon socket head cap screw
171-5	O ring	900-9	Hexagon headed bolt
171-6	O ring	900-10	Slotted hexagon nut
171-7	O ring	900-11	Hexagon headed bolt
172	Skeleton oil seal	900-12	Hexagon headed bolt
173	Mechanical seal	930-1	Spring washer
304	Shaft sleeve	930-2	Spring washer
309	Cable pressing plate	930-3	Spring washer
313	Top cover	930-4	Spring washer
317	Base	930-5	Spring washer
318	Float switch	930-6	Spring washer
319	Handle	930-7	Spring washer
321-1	Cutter knife	931	External tooth lock washer
321-2	Fix cutter	932	Flat washer
536	Outlet section	940	Key
702	Barrel	951	Wave washer

Product Parameters

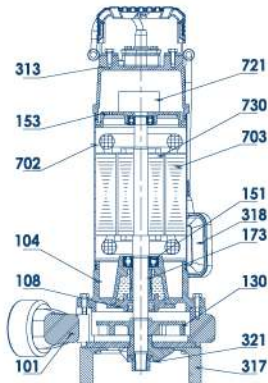

POS.	COMPONENT	CONSTRUCTION CHARACTERISTICS
101	PUMP BODY	Cast iron
104	OIL CHAMBER	Cast iron
108	OIL CHAMBER COVER	Cast iron
130	IMPELLER	Cast iron
151	BEARING	6203-2RZ
153	UPPER BEARING SEAT	Cast iron
173	MECHANICAL SEAL	Ceramic - graphite
313	TOP COVER	Cast iron
317	BASE	Cast iron
318	FLOAT SWITCH	Water pump level protector
321	CUTTER KNIFE	Stainless steel
702	BARREL	Stainless steel
703	STATOR	Stator core with winding
721	RUN CAPACITOR	Electronic device
730	ROTOR ASSEMBLY	Cast Aluminum Rotor

Product Dimensions

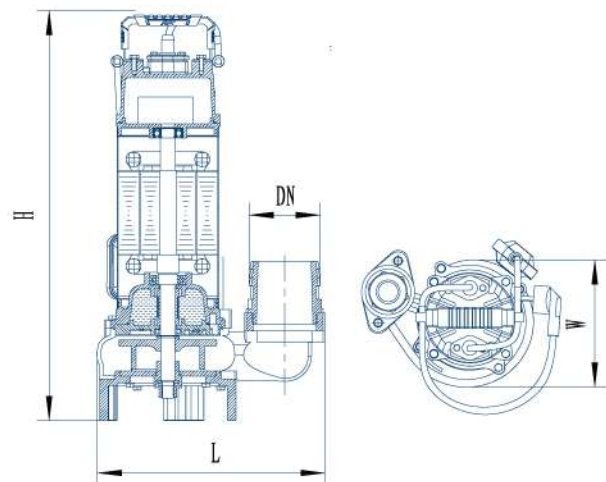

Model	DN1	L(mm)	W(mm)	H(mm)
GV800K	2"	229	167	445
GV1100K	2"	262	205	460
GV1300K	2"	244	196	479
GV1500K	2"	257	176	520
GV1800K	3"	305	189	543

GSU

Swimming Pool pump

Capacity up to 540 L/min(32.4m³/h)

Head up to 23m

Application Limits

Liquid temperature: +50°C
Ambient temperature: +50°C





Installation & Use

GSU series are single-stage centrifugal pumps with built-in filters. They are suitable for mariculture circulation filtration, medium-sized and commercial swimming pool circulation filtration. Quiet operation due to superior internal flow channel design that reduces hydraulic noise. Oversized filter basket extends the time between cleaning; transparent cover makes inspection quick and easy. One-piece carrying handle for easy installation.

Construction

Pump body and base: polypropylene
Impeller: PPO
Diffuser: polypropylene
Motor shaft: stainless steel
Mechanical seal: silicon graphite
Motor: two-pole single-phase motor, 220V/240V-50Hz, copper coil with built-in capacitor, with thermal overload protector.
Insulation class: Class F
Protection level: IP 55
Max. suction lift: 1.5m

Performance

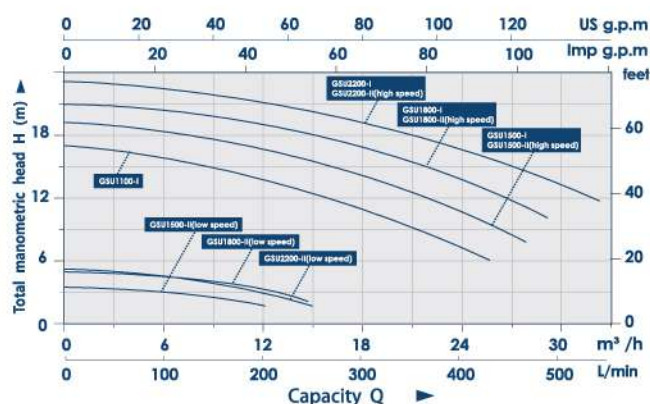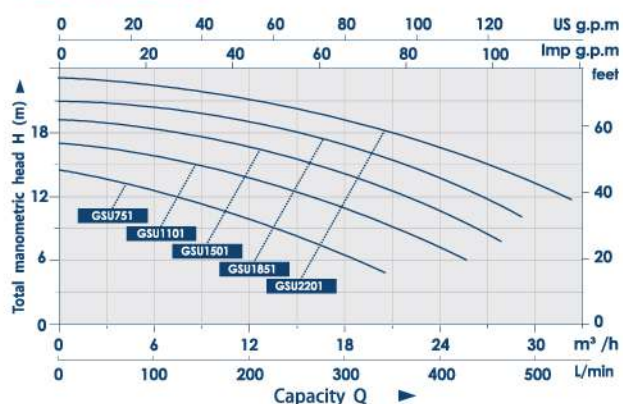


Model	Power		Current	Fitting Size	Q(m ³ /h)	Capacity Q (L/min)					
	KW	HP				0	6	12	18	24	30
GSU1100-I	1.1	1.5	5.2	60.3or63	H(m)	0	100	200	300	400	500
GSU1500-I	1.5	2	7	60.3or63		18.5	15.5	13.5	11	7	-
GSU1850-I	1.85	2.5	8.6	60.3or63		19.5	18.5	16.5	14	10.5	-
GSU2200-I	2.2	3	10	60.3or63		21	20	19	17	14	-
GSU1500-II	0.35	0.47	2.4	60.3or63		23	22	21	19	16.5	13.5
	1.5	2	7	60.3or63		4.5	3.5	2	-	-	-
GSU1850-II	0.4	0.5	2.8	60.3or63		19.5	18.5	16.5	14	10.5	-
	1.85	2.5	8.6	60.3or63		5	4.5	3	-	-	-
GSU2200-II	0.45	0.61	3.2	60.3or63		21	20	19	17	14	-
	2.2	3	10	60.3or63		5.5	4.5	3.5	-	-	-
GSU751	0.75	1	3.8	60.3or63		23	22	21	19	16.5	13.5
GSU1101	1.1	1.5	5.2	60.3or63		13	12.5	10	6.5	-	-
GSU1501	1.5	2	7	60.3or63		17	15.5	13.5	11	7	-
GSU1851	1.85	2.5	8.6	60.3or63		19	18.5	16.5	14	10.5	-
GSU2201	2.2	3	10	60.3or63		21	20	19	17	14	-
						23	22	21	19	16.5	13.5

Low speed 1450 r/min, High speed 2950 r/min


Swimming Pool Pump

Diagram

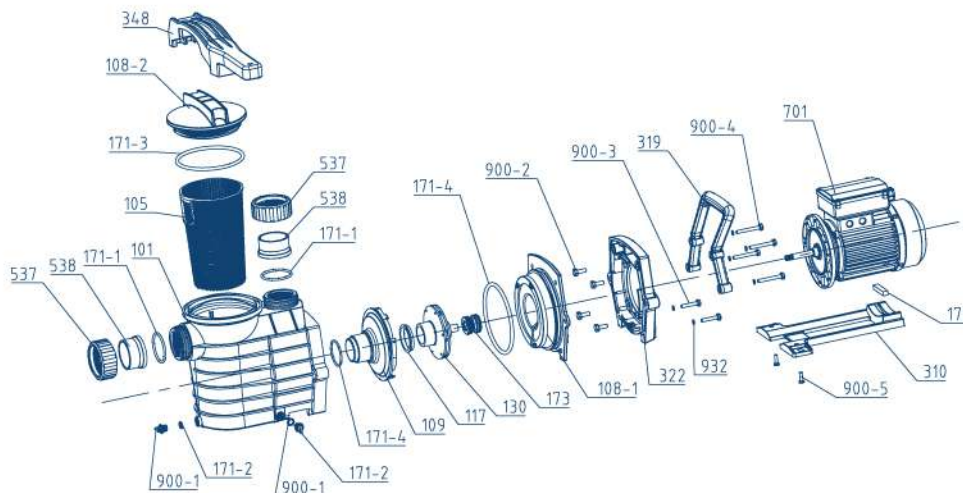


- 101** Pump body
- 105** Filter basket
- 108-1** Pump cover
- 108-2** Perspective Cover
- 109** Guide vane
- 117** Gasket
- 130** Impeller
- 170** Rubber gasket
- 171-1** O ring
- 171-2** O ring
- 171-3** O ring
- 171-4** O ring
- 173** Mechanical seal
- 303** Water retaining ring
- 310** Base plate
- 319** Handle
- 322** Coupling
- 348** Handle
- 537** Fitting nut
- 538** Joint
- 701** Motor
- 900-1** Vent cock
- 900-2** Hexagon headed bolt
- 900-3** Hexagon headed bolt
- 900-4** Hexagon headed bolt
- 900-5** Hexagon headed bolt
- 932** Flat washer

Product Parameters

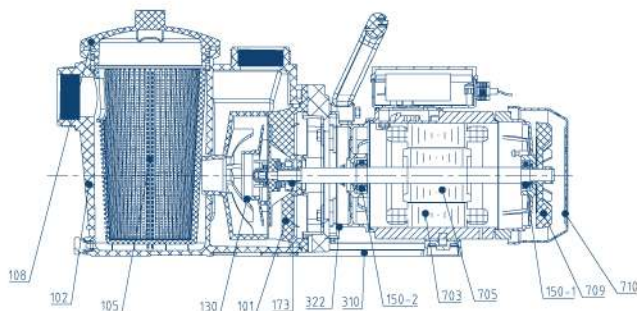

POS.	COMPONENT	CONSTRUCTION CHARACTERISTICS
101	PUMP BODY	Plastic
102	CASING	Plastic
105	FILTER BASKET	Plastic
108	PERSPECTIVE COVER	Plastic
130	IMPELLER	Plastic
150-1	BEARING	BEARING
150-2	BEARING	BEARING
173	MECHANICAL SEAL	Ceramic- graphite
310	BASE PLATE	Plastic
322	COUPLING	BEARING
703	STATOR	Stator core with winding
705	ROTOR	Stainless steel
709	FAN	Plastic
710	FAN COVER	Plastic

Product Dimensions

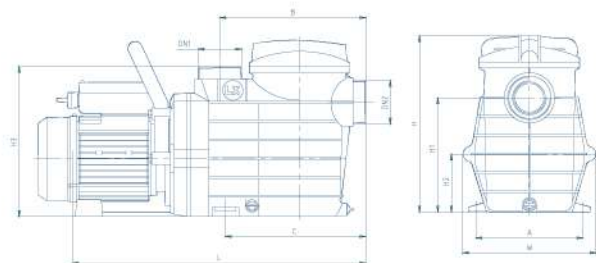

Model	DN1	DN2	Dimension(mm)								
			L	W	H	H1	H2	H3	A	B	C
GSU100-I	2FBT	2FBT	628	240	320	207	105	272	194	264	254
GSU1500-I	2FBT	2FBT	628	240	320	207	105	272	194	264	254
GSU1850-I	2FBT	2FBT	628	240	320	207	105	272	194	264	254
GSU2200-I	2FBT	2FBT	628	240	320	207	105	272	194	264	254
GSU1500-II	2FBT	2FBT	628	240	320	207	105	272	194	264	254
GSU1850-II	2FBT	2FBT	628	240	320	207	105	272	194	264	254
GSU2200-II	2FBT	2FBT	628	240	320	207	105	272	194	264	254
GSU751	2FBT	2FBT	593	240	320	207	105	272	194	264	254
GSU1101	2FBT	2FBT	593	240	320	207	105	272	194	264	254
GSU1501	2FBT	2FBT	593	240	320	207	105	272	194	264	254
GSU1851	2FBT	2FBT	593	240	320	207	105	272	194	264	254
GSU2201	2FBT	2FBT	609	240	320	207	105	272	194	264	254

Accessories Control

Installation & Use

The Grandfar controller has high quality, multi-functional, low noise and strong commonality etc. characteristics. This series of controller can ensure great reliability and efficiency. The controller can start and stop the water pump automatically. Stop the pump in the case of water shortage. After power cut off, restart the pump automatically when the power on. Due to its reliability and flexibility, this controller is suitable for hotels, apartment, residential community area, high-rise building, orchard, office, water treatment equipment etc.

Features

- Sleep Function: No water consumption pump decelerates to the down limit and after a detection then sleep down. Until the pressure below settings, master pump wake up automatically.
- Restart after Power on: Power off during running, it restarts when power on again.
- Terminal Run/Stop: Can be connected to external switch from terminal. When switch on, pump run and maintain a setting constant pressure; When switch off, pump stopped.
- Simple installation and no required maintenance.
- Electrical fault protection: When there is an over current, over voltage, under voltage, phase loss, over load etc, the controller will stop automatically.

Accessories Control

Technical Data

Model	Voltage	Starting Pressure	Current	size	Protection Class	G/W	N/W
			A	Inch		kg	kg
GFAm1	220-240V/110-115V	1.5/2.28/3.5Bar	10A	1"x1"	IP65	1.4	1.1



Accessories Control

Technical Data

Model	Voltage	Starting Pressure	Current	size	Protection Class	G/W	N/W
			A	Inch		kg	kg
GFAm20	90-260V	1.0~10Bar	10A	1"x1"	IP65	2.3	2.5



Accessories Control

Technical Data

Model	Voltage	Cable Size	Current
			A
FL0-1	220V-240V	3*0.75mm ² /3*1.0mm ² /3*1.55mm ² 45cm/60cm/75cm/2m/3m/5m/10m	16(12)A



Accessories Control

Technical Data

Model	Voltage	Starting Pressure	Current	size	Protection Class	G/W	N/W
			A	Inch		kg	kg
PS-02	220-240V/110-115V	5.4-7/8-11Bar	12A	F1/4"	IP20	0.35	0.3




Accessories Control

Technical Data

Model	Voltage	Starting Pressure	Current	size	Protection Class	G/W	N/W
			A	Inch		kg	kg
PS-09	220-240V/110-115V	1.4-2.8Bar	12A	F1/4"	IP54	0.35	0.3



Check Our Range

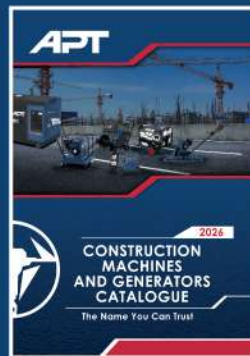


APT

The Name You Can Trust



APT

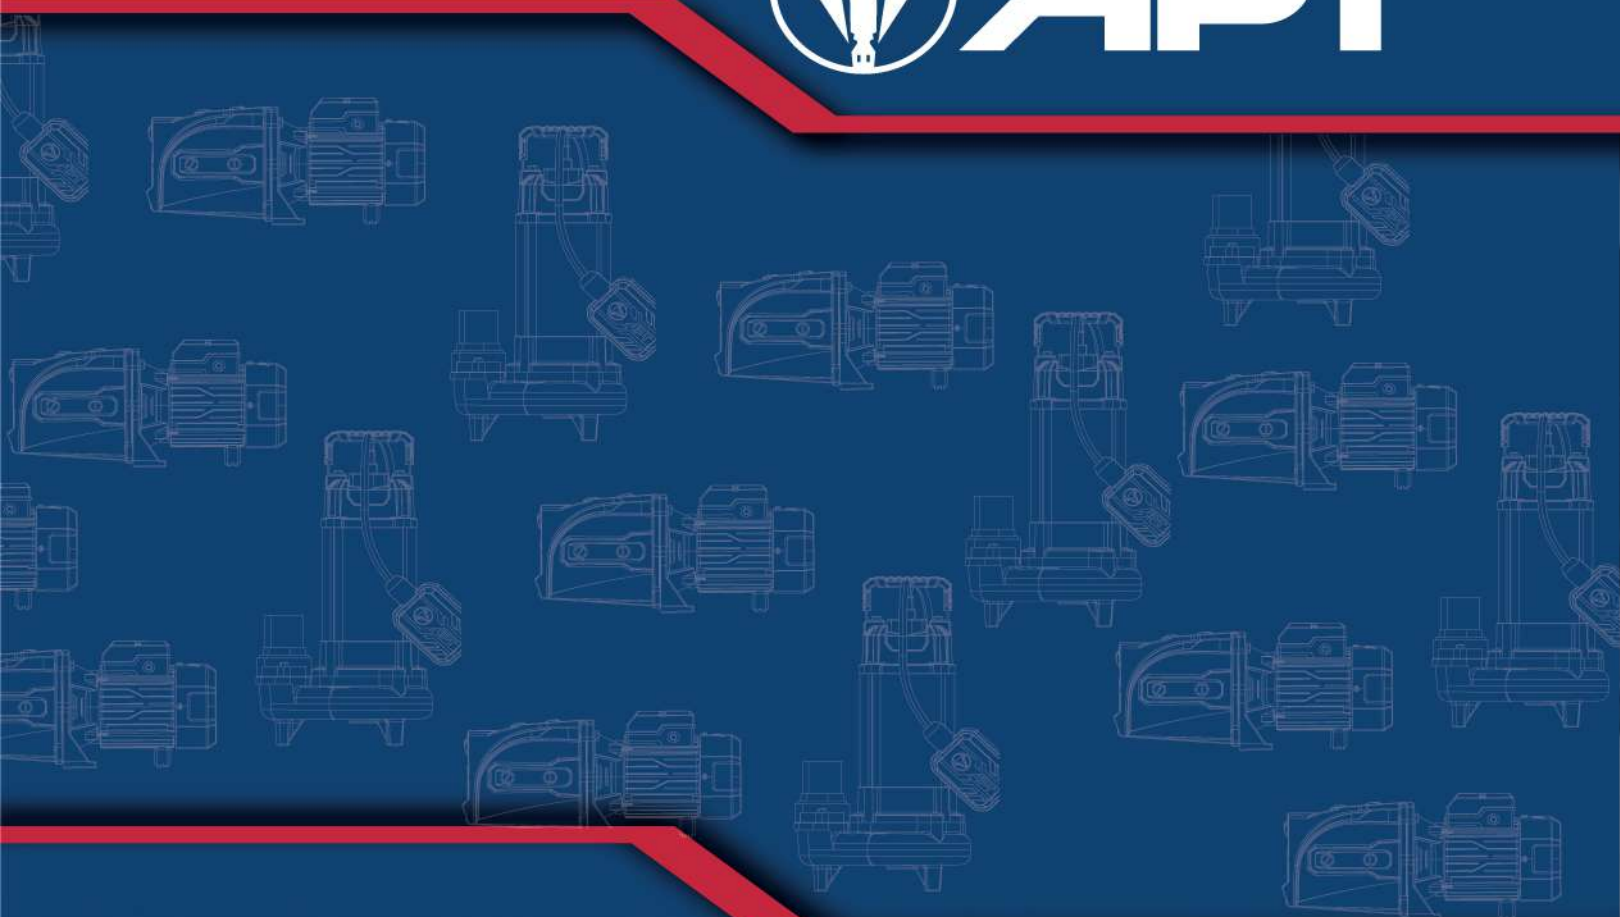

Contact Us



Info@apt-international.com

