




BONA WATER PURIFICATION

Add: No. 56 Beishan Branch Road, Xindeng Town, Fuyang District,
Hangzhou City, Zhejiang Province China.
Tel: 86-0571-63259906 63258368 63218277 (For English)
Fax: 86-0571-63254886
Post: 311404
E-mail: tongliwater@263.net

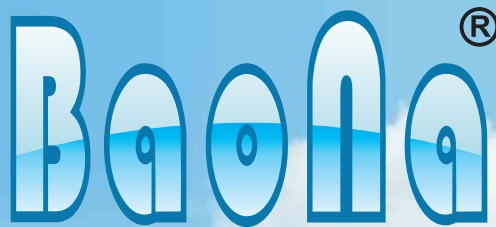

Water Purification
Products Catalogue for 2024



www.bonawater.com
杭州富阳博纳水净化设备有限公司



Enterprise Profile 公司简介

Hangzhou Fuyang Bona Water Purification Equipment Co., Ltd. is a high-tech enterprise specializing in water purification equipment and accessories, which was established in 2001. Its main products are stainless steel RO membrane housings, cartridge filter housings, bag filter housings, multi-media filter housings, water tank, filter bags and cartridges, etc. The company is located in Xindeng Town, Hangzhou City, China. It covers an area of 25,000 square meters and has an independent factory building of 30,000 square meters.

After more than 20 years of development, the company has a large number of high-quality technology researching and developing personnel and experienced front-line manufacturing staff, and has successively passed the European Union CE certification, national high-tech enterprise certification, ISO 9001:2008 quality management system certification, ASME-U stamp certification, and obtained more than 50 national patented technologies. In 2017, the company's R&D center was recognized as Hangzhou High-tech Research and Development Center.

The company has been continuously striving to improve product quality, optimize product structure and production line. It has introduced large-scale optical fiber laser cutting machine, automatic winding machine, automatic polishing machine, ABB robot welding workstation and other advanced equipment, and adopted international advanced production technology, greatly improving product quality. We adhere to the business philosophy of "strict production, strict management, strict quality assurance" to provide the best quality products and the most professional services. After more than 20 years of development, Bona has developed into a professional manufacturer of water purification equipment and accessories, which integrates design, research, production and sales. The "BAONA" brand water purification products are well received by more than 100 countries and regions including the Middle East, Europe and the United States, South Korea, Japan and so on.

"Gain all strong points, Absorb wide witness" BONA's goals and ideals are to pursue and create good products for mankind, society, environment and harmony. Bona is willing to work with you to create a better future!

杭州富阳博纳水净化设备有限公司是一家专业生产水净化设备及配件的国家级高新技术企业，公司成立于2001年，主要产品有：不锈钢膜壳、精密过滤器、袋式过滤器、多介质过滤器、无菌水箱、滤芯滤袋等。

公司坐落在中国杭州市新登镇，占地面积25000平方米，拥有自主厂房30000平方米。经过20多年的发展已拥有一大批高素质的技术研发人才和经验丰富的一线制造员工，并陆续通过了欧盟CE认证、国家高新技术企业认定、ISO9001:2008质量管理体系认证、美国机械工程师协会ASME-U钢印认证，获得了50余项国家专利技术，2017年，公司研发中心被认定为杭州市高新技术研发中心。

公司一直持续努力提高产品质量，优化产品结构和生产线，先后引进了大型光纤激光切割机、全自动卷板机、自动抛光机，ABB机器人焊接工作站等先进设备，采用国际先进的生产技术，大大提升了产品的品质。我们本着“严格生产、严格管理、严格质保”的经营理念，以确保为客户提供最优质的产品和服务。经过20多年的砥砺前行，博纳已经发展成为行业内集设计、研发、生产、销售为一体的规模化水净化设备及配件的专业生产厂家，所生产的“BAONA”牌水净化产品深受国内、中东、欧美、韩国、日本等100多个国家和地区的青睐。

“博采众长，海纳百川”，博纳的远景目标和理想：为人类、为社会、为环境、为和谐无止境的追求与创造。博纳愿与您携手共创美好！


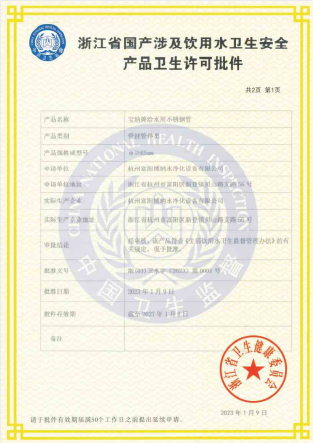


Table Of Contents 目录索引

RO Membrane Housing 不锈钢膜壳

BN1-R040	2
BN2-R040	3
BN3-R040	4
BN5-R040	5
BN6-R080	6
BN7-R080	7
BN8-R080	8
BN9-R080	9

Cartridge Filter Housing 精滤器

BN1	10
BN2	11
BN3	12
BN4	13
BN5	14
BN6	15
BN7 A型 B型	16
BN7 C型 D型	17
BN7 E型	18

Big flow filter 大流量过滤器

BN8-Filter Housing	19
BN9-Filter Housing	20
BN10-Filter Housing	21

Sanitary Cartridge Filter Housing 卫生级精滤器

1RS	22
DL-RS	23

Bag Filter Housing 袋式过滤器

BFL	24
BFH	25
BFC	26
BFM	27

Basket Filter 篮式过滤器

28

Mechanical Filter 机械过滤器

29

Ion Exchanger 离子交换器

30

Softening Vessel 软化罐

Without Legs Type	31
With Legs Type	32

Water Tank 水箱

33

Heat exchanger 热交换器

34

Coupling 卡套

35



BONA WATER PURIFICATION

Add:No. 56 Beishan Branch Road, Xindeng Town, Fuyang District,
Hangzhou City, Zhejiang Province China.
Tel:86-0571-63259906 63258368 63218277 (For English)
Fax:86-0571-63254886
Post: 311404
E-mail: tongliwater@263.net




BN1-R040不锈钢膜壳

- 1、材质SUS304,SUS316L;
- 2、端盖材质ABS,SUS304,SUS316L;
- 3、最大工作压力250Psi;
- 4、表面抛光处理或拉丝处理。


BN1-R040 Stainless Steel RO Membrane Housing

Material:SUS304, SUS316L;
Material of end cap: ABS; SUS304; SUS316L;
Max working pressure 250Psi;
Polished or brushing external surface.

Standard specifications

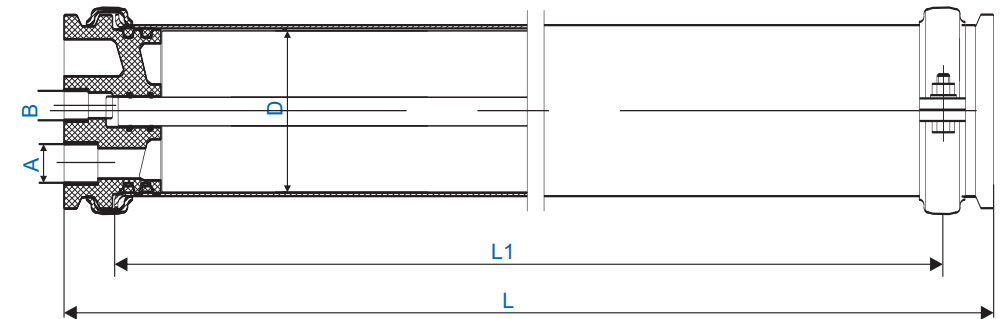

Model	L (mm)	L1 (mm)	D (mm)	A (in)	B (out)
BN1-2514	417	363	φ 62	3/8 "	1/4 "
BN1-2521	594	540	φ 62	3/8 "	1/4 "
BN1-2540	1082	1024	φ 62	3/8 "	3/8 "
BN1-4014	427	367	φ 102	1/2 "	1/2 "
BN1-4021	605	545	φ 102	1/2 " 3/4 "	1/2 "
BN1-4040	1088	1028	φ 102	1/2 " 3/4 "	1/2 "
BN1-4080	2104	2044	φ 102	3/4 "	1/2 "
BN1-40120	3120	3060	φ 102	3/4 "	1/2 "
BN1-40160	4136	4076	φ 102	3/4 "	1/2 "

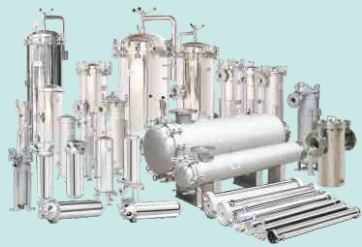

BONA WATER PURIFICATION

Add:No. 56 Beishan Branch Road, Xindeng Town, Fuyang District,
Hangzhou City, Zhejiang Province China.
Tel:86-0571-63259906 63258368 63218277 (For English)
Fax:86-0571-63254886
Post: 311404
E-mail: tongliwater@263.net

BN2-R040不锈钢膜壳


- 1、材质SUS304,SUS316L;
- 2、端盖材质ABS,SUS304,SUS316L;
- 3、最大工作压力250Psi;
- 4、表面抛光处理或拉丝处理。



**BN2-R040
Stainless Steel RO Membrane Housing**

Material:SUS304,SUS316L;
Material of end cap:ABS;SUS304;SUS316L;
Max working pressure 250Psi;
Polished or brushing external surface.

Standard specifications

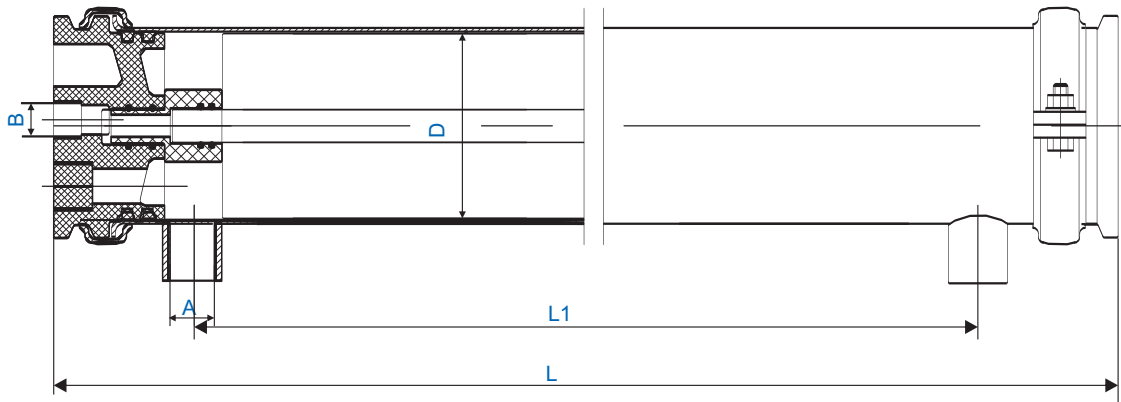

Model	L (mm)	L1 (mm)	D (mm)	A (in)	B (out)
BN2-2521	655	511	φ 62	1/2 "	1/4 "
BN2-2540	1136	994	φ 62	1/2 "	3/8 "
BN2-4021	668	515	φ 102	3/4 "	1/2 "
BN2-4040	1148	998	φ 102	3/4 "	1/2 "
BN2-4080	2164	2014	φ 102	3/4 "	1/2 "
BN2-40120	3180	3030	φ 102	3/4 "	1/2 "
BN2-40160	4196	4046	φ 102	3/4 "	1/2 "

BN3-R040 不锈钢膜壳


- 1. 材质 SUS304,SUS316L;
- 2. 最大工作压力 400 Psi;
- 3. 表面抛光处理或拉丝处理。




**BN3-R040
Stainless Steel RO Membrane Housing**

Material: SUS304, SUS316L;
Max working pressure 400 Psi;
Polished or brushing external surface.

Standard specifications

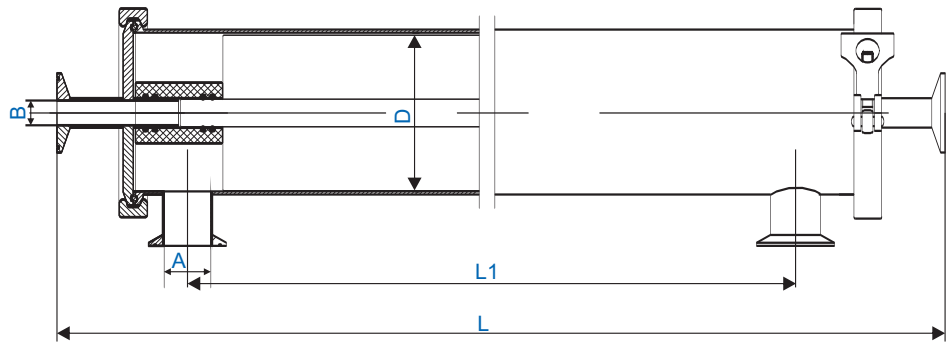

Model	L (mm)	L1 (mm)	D (mm)	A (in)	B (out)
BN3-2521	693	527	φ 62	3/4 "	3/4 "
BN3-2540	1176	1010	φ 62	3/4 "	3/4 "
BN3-4021	693	527	φ 102	1 "	3/4 "
BN3-4040	1176	1010	φ 102	1 "	3/4 "
BN3-4080	2192	2026	φ 102	1 "	3/4 "
BN3-40120	3208	3042	φ 102	1 " -1 1/4 "	3/4 "
BN3-40160	4224	4058	φ 102	1 " -1 1/4 "	3/4 "
BN3-8040	1366	1099	φ 203	1 1/2 " -2 "	1 1/2 "
BN3-8080	2382	2115	φ 203	1 1/2 " -2 "	1 1/2 "
BN3-80120	3398	3131	φ 203	1 1/2 " -2 "	1 1/2 "
BN3-80160	4414	4147	φ 203	1 1/2 " -2 "	1 1/2 "
BN3-80200	5430	5163	φ 203	1 1/2 " -2 "	1 1/2 "
BN3-80240	6446	6179	φ 203	1 1/2 " -2 "	1 1/2 "

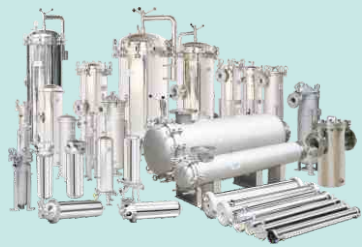

BONA WATER PURIFICATION

Add:No. 56 Beishan Branch Road, Xindeng Town, Fuyang District, Hangzhou City, Zhejiang Province China.
Tel:86-0571-63259906 63258368 63218277 (For English)
Fax:86-0571-63254886
Post: 311404
E-mail: tongliwater@263.net



BN5-RO40 不锈钢膜壳

- 1. 材质 SUS304,SUS316L;
- 2. 最大工作压力 1000Psi;
- 3. 表面抛光处理或拉丝处理。

BN5-RO40:
End-in type and Side-in type
Stainless Steel RO Membrane Housing

Material: SUS304, SUS316L;
Max working pressure 1000 Psi;
Polished or brushing external surface .





BN6-RO80 不锈钢膜壳

- 1. 材质 SUS304,SUS316L;
- 2. 最大工作压力 300Psi;
- 3. 表面抛光处理或亚光处理。


BN6-RO80
Stainless Steel RO Membrane Housing


Material: SUS304, SUS316L;
Max working pressure 300 Psi;
Polished or sandblast external surface .

Standard specifications

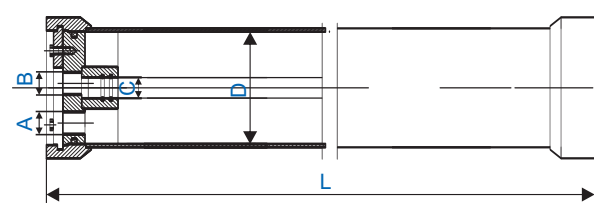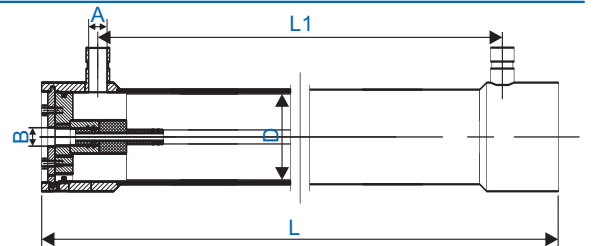					
					
Model	L (mm)	C (mm)	D (mm)	A (in)	B (out)
BN5-4021-E	612	φ 19.5	φ 102	1/2 "	1/2 "
BN5-4040-E	1094	φ 19.5	φ 102	1/2 "	1/2 "
BN5-4080-E	2110	φ 19.5	φ 102	1/2 "	1/2 "
BN5-40120-E	3126	φ 19.5	φ 102	1/2 "	1/2 "
BN5-40160-E	4142	φ 19.5	φ 102	1/2 "	1/2 "
Model	L (mm)	L1 (mm)	D (mm)	A (in)	B (out)
BN5-2540-S	1162	1034	φ 62	1/2 " -3/4 "	1/2 "
BN5-4021-S	730	602	φ 102	3/4 " -1 "	1/2 "
BN5-4040-S	1212	1084	φ 102	3/4 " -1 "	1/2 "
BN5-4080-S	2228	2100	φ 102	3/4 " -1 "	1/2 "
BN5-40120-S	3244	3116	φ 102	3/4 " -1 "	1/2 "
BN5-40160-S	4260	4132	φ 102	3/4 " -1 "	1/2 "

Standard specifications

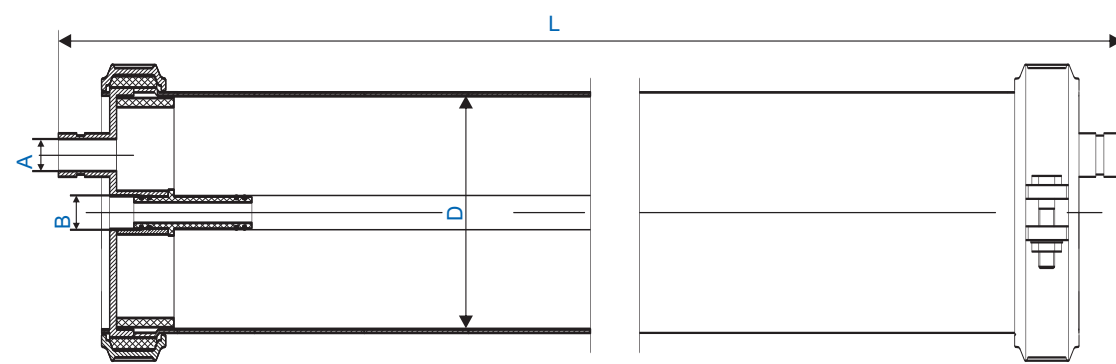				
Model	L (mm)	D (mm)	A (in)	B (out)
BN6-8040	1232	φ 203	1- 1/2 "	1 "
BN6-8080	2248	φ 203	1- 1/2 "	1 "
BN6-80120	3264	φ 203	1- 1/2 "	1 "
BN6-80160	4284	φ 203	1- 1/2 "	1 "
BN6-80200	5300	φ 203	1- 1/2 "	1 "
BN6-80240	6316	φ 203	1- 1/2 "	1 "

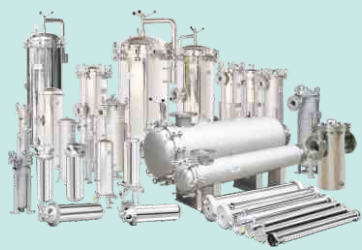

BONA WATER PURIFICATION

Add: No. 56 Beishan Branch Road, Xindeng Town, Fuyang District,
Hangzhou City, Zhejiang Province China.
Tel: 86-0571-63259906 63258368 63218277 (For English)
Fax: 86-0571-63254886
Post: 311404
E-mail: tongliwater@263.net



BN7-RO80 不锈钢膜壳

1. 材质 SUS304, SUS316L;
2. 最大工作压力 300 Psi;
3. 表面抛光处理或亚光处理。


BN7-RO80: Stainless Steel RO Membrane Housing

Material: SUS304, SUS316L;
Max working pressure 300 Psi;
Polished or sandblast external surface .



BN8-RO80 不锈钢膜壳


1. 材质SUS304, SUS316L;
2. 最大工作压力 1000 Psi;
3. 表面抛光处理或亚光处理。

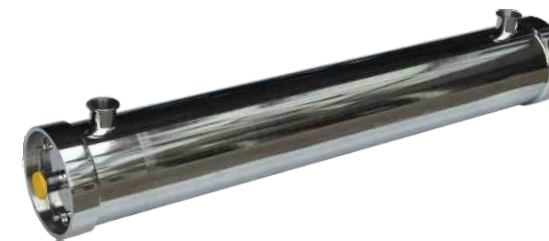

BN8-RO80 Victaulic-port type and Tri-clover port type Stainless Steel RO Membrane Housing


Material: SUS304, SUS316L;
Max working pressure 1000 Psi;
Polished or sandblast external surface.

Standard specifications

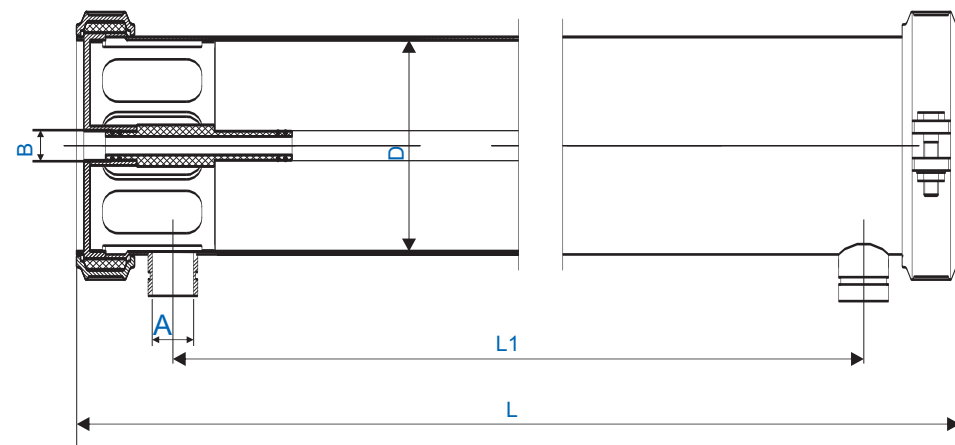


Model	L (mm)	L1 (mm)	D (mm)	A (in)	B (out)
BN7-8040	1288	1101	φ 203	1 1/2 "	1 "
BN7-8080	2304	2117	φ 203	1 1/2 "	1 "
BN7-80120	3320	3133	φ 203	1 1/2 "	1 "
BN7-80160	4336	4149	φ 203	1 1/2 "	1 "
BN7-80200	5352	5165	φ 203	1 1/2 "	1 "
BN7-80240	6368	6181	φ 203	1 1/2 "	1 "

Standard specifications

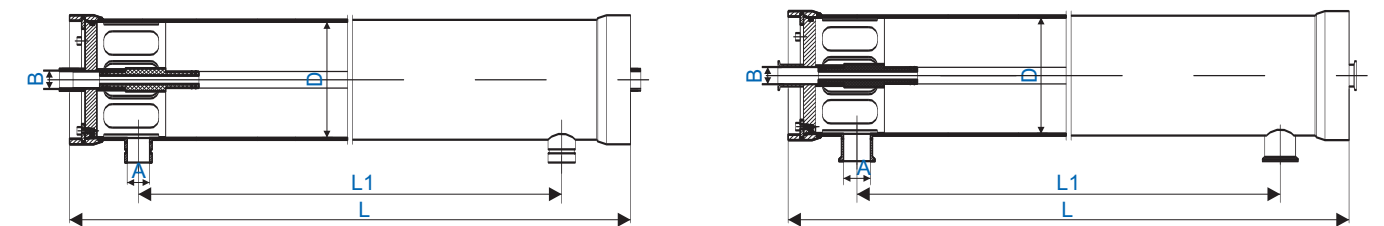

Model	L (mm)	L1 (mm)	D (mm)	A (in)	B (out)
BN8-8040-V	1359	1119	φ 203	1 1/2 " -3 "	1 "
BN8-8080-V	2375	2135	φ 203	1 1/2 " -3 "	1 "
BN8-80120-V	3391	3151	φ 203	1 1/2 " -3 "	1 "
BN8-80160-V	4407	4167	φ 203	1 1/2 " -3 "	1 "
BN8-80200-V	5423	5183	φ 203	1 1/2 " -3 "	1 "
BN8-80240-V	6439	6199	φ 203	1 1/2 " -3 "	1 "

Model	L (mm)	L1 (mm)	D (mm)	A (in)	B (out)
BN8-8040-T	1359	1119	φ 203	1 1/2 " -3 "	1 " -1/2 "
BN8-8080-T	2375	2135	φ 203	1 1/2 " -3 "	1 " -1/2 "
BN8-80120-T	3391	3151	φ 203	1 1/2 " -3 "	1 " -1/2 "
BN8-80160-T	4407	4167	φ 203	1 1/2 " -3 "	1 " -1/2 "
BN8-80200-T	5423	5183	φ 203	1 1/2 " -3 "	1 " -1/2 "
BN8-80240-T	6439	6199	φ 203	1 1/2 " -3 "	1 " -1/2 "

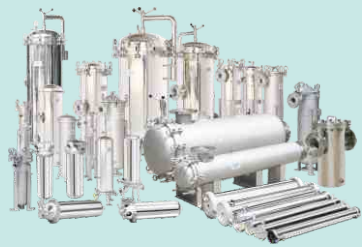

BONA WATER PURIFICATION

Add: No. 56 Beishan Branch Road, Xindeng Town, Fuyang District,
Hangzhou City, Zhejiang Province China.
Tel: 86-0571-63259906 63258368 63218277 (For English)
Fax: 86-0571-63254886
Post: 311404
E-mail: tongliwater@263.net





BN9-RO80 不锈钢膜壳

1. 材质 SUS304, SUS316L;
2. 最大工作压力 600 Psi;
3. 表面抛光处理或亚光处理。

BN9-RO80

Victaulic-port type and Tri-clover port type
Stainless Steel RO Membrane Housing

Material: SUS304, SUS316L;
Max working pressure 600 Psi;
Polished or sandblast external surface.

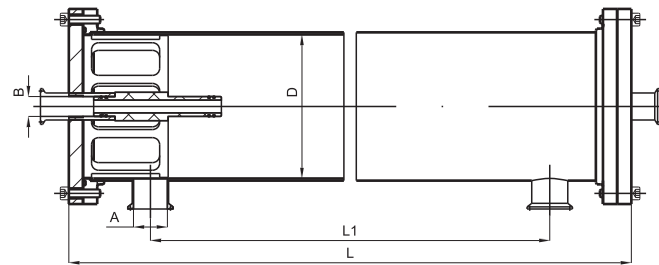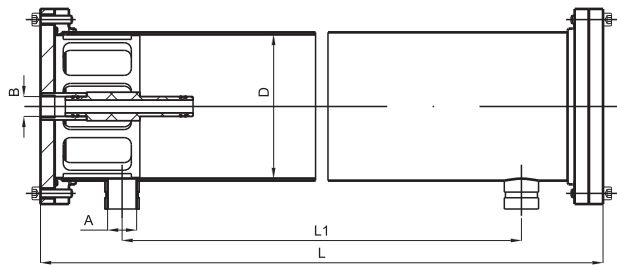

Standard specifications

Model	L (mm)	L1 (mm)	D (mm)	A (in)	B (out)
BN9-8040-V	1301	1071	φ 203	1 1/2 " -2 "	1 "
BN9-8080-V	2317	2087	φ 203	1 1/2 " -2 "	1 "
BN9-80120-V	3333	3103	φ 203	1 1/2 " -2 "	1 "
BN9-80160-V	4349	4119	φ 203	1 1/2 " -2 "	1 "
BN9-80200-V	5365	5135	φ 203	1 1/2 " -2 "	1 "
BN9-80240-V	6381	6151	φ 203	1 1/2 " -2 "	1 "

Model	L (mm)	L1 (mm)	D (mm)	A (in)	B (out)
BN9-8040-T	1301	1071	φ 203	1 1/2 " -2 "	1.5 "
BN9-8080-T	2317	2087	φ 203	1 1/2 " -2 "	1.5 "
BN9-80120-T	3333	3103	φ 203	1 1/2 " -2 "	1.5 "
BN9-80160-T	4349	4119	φ 203	1 1/2 " -2 "	1.5 "
BN9-80200-T	5365	5135	φ 203	1 1/2 " -2 "	1.5 "
BN9-80240-T	6381	6151	φ 203	1 1/2 " -2 "	1.5 "





BN1- 精滤器

1. 材质 SUS304, SUS316L;
2. 最大工作压力 100 Psi;
3. 表面抛光处理或亚光处理。


BN1- Cartridge Filter Housing

Material: SUS304, SUS316L;
Max working pressure 100 Psi
Polished or sandblast external surface.

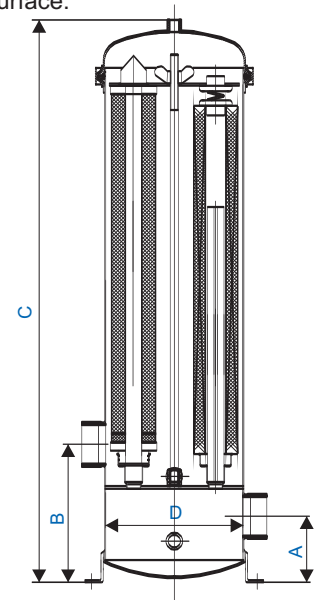

Standard specifications

Model	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	In/Out	Drain
BN1-W3L1	120	220	600	φ 170	φ 219	230	1 " -1 1/2 "	1/4 " -1/2 "
BN1-W3L2	120	220	850	φ 170	φ 219	230	1 " -1 1/2 "	1/4 " -1/2 "
BN1-W3L3	120	220	1100	φ 170	φ 219	230	1 " -2 "	1/4 " -1/2 "
BN1-W3L4	120	220	1350	φ 170	φ 219	230	1 " -2 "	1/4 " -1/2 "
BN1-W5L1	120	220	610	φ 200	φ 248	260	1 " -1 1/2 "	1/4 " -1/2 "
BN1-W5L2	120	220	860	φ 200	φ 248	260	1 " -1 1/2 "	1/4 " -1/2 "
BN1-W5L3	120	220	1110	φ 200	φ 248	260	1 " -2 "	1/4 " -1/2 "
BN1-W5L4	120	220	1360	φ 200	φ 248	260	1 " -2 "	1/4 " -1/2 "
BN1-W7L1	120	220	620	φ 250	φ 310	310	1 1/2 " -2 "	1/2 "
BN1-W7L2	120	220	870	φ 250	φ 310	310	1 1/2 " -2 "	1/2 "
BN1-W7L3	120	220	1120	φ 250	φ 310	310	1 1/2 " -2 1/2 "	1/2 "
BN1-W7L4	120	220	1370	φ 250	φ 310	310	1 1/2 " -2 1/2 "	1/2 "

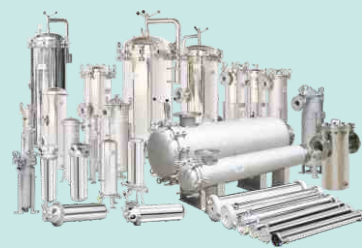

BONA WATER PURIFICATION

Add:No. 56 Beishan Branch Road, Xindeng Town, Fuyang District,
Hangzhou City, Zhejiang Province China.
Tel:86-0571-63259906 63258368 63218277 (For English)
Fax:86-0571-63254886
Post: 311404
E-mail : tongliwater@263.net





BN2- 精滤器

- 1. 材质 SUS304,SUS316L;
- 2. 最大工作压力 100 Psi;
- 3. 表面抛光处理或亚光处理。

BN2-Cartridge Filter Housing

Material: SUS304, SUS316L;
Max working pressure 100 Psi
Polished or sandblast external surface.

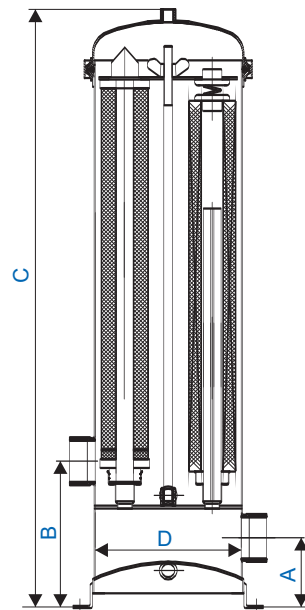

Standard specifications

Model	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	In/Out	Drain
BN2-W3L1	75	180	550	φ 170	φ 219	230	1 " -1 1/2 "	1/4 " -1/2 "
BN2-W3L2	75	180	800	φ 170	φ 219	230	1 " -1 1/2 "	1/4 " -1/2 "
BN2-W3L3	75	180	1050	φ 170	φ 219	230	1 " -2 "	1/4 " -1/2 "
BN2-W3L4	75	180	1300	φ 170	φ 219	230	1 " -2 "	1/4 " -1/2 "
BN2-W5L1	75	180	560	φ 200	φ 248	260	1 " -1 1/2 "	1/4 " -1/2 "
BN2-W5L2	75	180	810	φ 200	φ 248	260	1 " -1 1/2 "	1/4 " -1/2 "
BN2-W5L3	75	180	1060	φ 200	φ 248	260	1 " -2 "	1/4 " -1/2 "
BN2-W5L4	120	220	1360	φ 200	φ 248	260	1 " -2 "	1/4 " -1/2 "
BN2-W7L1	120	220	620	φ 250	φ 310	310	1 1/2 " -2 "	1/2 "
BN2-W7L2	120	220	870	φ 250	φ 310	310	1 1/2 " -2 "	1/2 "
BN2-W7L3	120	220	1120	φ 250	φ 310	310	1 1/2 " -2 1/2 "	1/2 "
BN2-W7L4	120	220	1370	φ 250	φ 310	310	1 1/2 " -2 1/2 "	1/2 "





BN3- 精滤器

- 1. 材质 SUS304, SUS316L;
- 2. 最大工作压力 150 Psi
- 3. 表面抛光处理或亚光处理。


BN3-Cartridge Filter Housing

Material: SUS304, SUS316L;
Max design working pressure 150 Psi;
Polished or sandblast external surface .

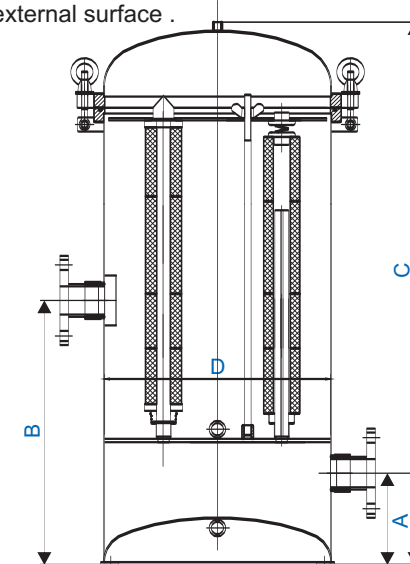

Standard specifications

Model	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	In/Out	Drain
BN3-W5L3	80	180	1090	φ 200	φ 248	344	1 1/2 " -2 "	1/2 "
BN3-W5L4	80	180	1340	φ 200	φ 248	344	1 1/2 " -2 "	1/2 "
BN3-W7L3	120	600	1160	φ 250	φ 310	410	1 1/2 " -2 "	1/2 "
BN3-W7L4	120	800	1410	φ 250	φ 310	410	1 1/2 " -2 "	1/2 "
BN3-W11L3	150	600	1170	φ 300	φ 360	460	2 " -3 "	1/2 "
BN3-W11L4	150	800	1420	φ 300	φ 360	460	2 " -3 "	1/2 "
BN3-W15L3	150	600	1180	φ 350	φ 410	530	2 " -3 "	3/4 "
BN3-W15L4	150	800	1430	φ 350	φ 410	530	2 " -3 "	3/4 "
BN3-W20L3	150	600	1190	φ 400	φ 460	560	2 " -4 "	3/4 "
BN3-W20L4	150	800	1440	φ 400	φ 460	560	2 " -4 "	3/4 "
BN3-W27L3	150	600	1200	φ 450	φ 510	630	2 " -4 "	3/4 "
BN3-W27L4	150	800	1450	φ 450	φ 510	630	2 " -4 "	3/4 "

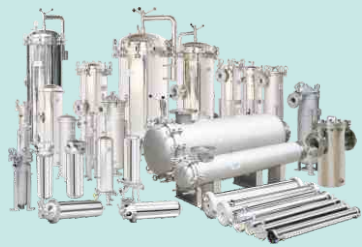

BONA WATER PURIFICATION

Add:No. 56 Beishan Branch Road, Xindeng Town, Fuyang District, Hangzhou City, Zhejiang Province China.
Tel:86-0571-63259906 63258368 63218277 (For English)
Fax:86-0571-63254886
Post: 311404
E-mail: tongliwater@263.net





BN4- 精濾器

- 1. 材质 SUS304, SUS316L;
- 2. 最大工作压力 150 Psi;
- 3. 表面抛光处理或亚光处理。

BN4-Cartridge Filter Housing

Material: SUS304, SUS316L;
Max working pressure 150 Psi;
Polished or sandblast external surface.

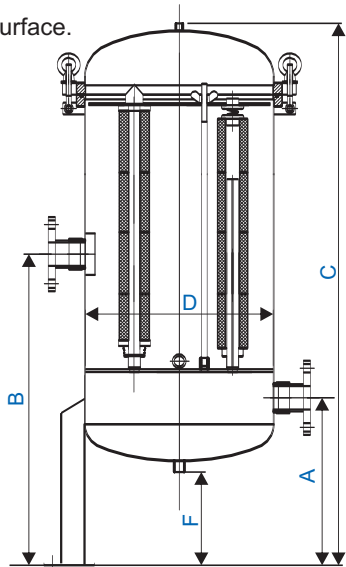

Standard specifications

Model	A (mm)	B (mm)	C (mm)	D (mm)	F (mm)	H (mm)	In/Out	Drain
BN4-W5L3	250	600	1250	φ 200	150	340	1 1/2 " -2 "	1/2 "
BN4-W5L4	250	700	1500	φ 200	150	340	1 1/2 " -2 "	1/2 "
BN4-W7L3	300	700	1300	φ 250	150	390	1 1/2 " -2 "	1/2 "
BN4-W7L4	300	800	1550	φ 250	150	390	1 1/2 " -2 "	1/2 "
BN4-W11L3	360	700	1380	φ 300	200	440	2 " -3 "	1/2 "
BN4-W11L4	360	900	1620	φ 300	200	440	2 " -3 "	1/2 "
BN4-W15L3	380	800	1420	φ 350	200	530	2 " -3 "	3/4 "
BN4-W15L4	380	900	1660	φ 350	200	530	2 " -3 "	3/4 "
BN4-W20L3	400	800	1460	φ 400	200	560	2 " -4 "	3/4 "
BN4-W20L4	400	900	1700	φ 400	200	560	2 " -4 "	3/4 "
BN4-W27L3	460	800	1530	φ 450	250	630	2 " -4 "	3/4 "
BN4-W27L4	460	1000	1770	φ 450	250	630	2 " -4 "	3/4 "





BN5- 精濾器


- 1. 材质 SUS304, SUS316L;
- 2. 最大工作压力 150 Psi;
- 3. 表面抛光处理或亚光处理。

BN5-Cartridge Filter Housing

Material: SUS304, SUS316L;
Max design working pressure 150 Psi
Polished or sandblast external surface.

Model	A (mm)	B (mm)	C (mm)	D (mm)	F (mm)	H (mm)	In/Out	Drain
BN5-W15L3	370	800	1580	φ 350	200	490	1 1/2 " -2 "	3/4 "
BN5-W15L4	370	900	1830	φ 350	200	490	1 1/2 " -2 "	3/4 "
BN5-W20L3	390	900	1630	φ 400	200	560	2 " -3 "	3/4 "
BN5-W20L4	390	1000	1880	φ 400	200	560	2 " -3 "	3/4 "
BN5-W27L3	460	900	1680	φ 450	250	610	2 " -4 "	3/4 "
BN5-W27L4	460	1100	1930	φ 450	250	610	2 " -4 "	3/4 "
BN5-W30L3	480	900	1740	φ 500	250	660	2 " -4 "	1 "
BN5-W30L4	480	1100	1990	φ 500	250	660	2 " -4 "	1 "
BN5-W36L3	500	900	1780	φ 550	250	710	2.5 " -4 "	1 "
BN5-W36L4	500	1100	2030	φ 550	250	710	2.5 " -4 "	1 "
BN5-W40L3	560	1000	1850	φ 600	300	760	2 1/2 " -4 "	1 "
BN5-W40L4	560	1200	2100	φ 600	300	760	2 1/2 " -4 "	1 "
BN5-W50L3	580	1000	1880	φ 650	300	810	3 " -4 "	1 "
BN5-W50L4	580	1200	2130	φ 650	300	810	3 " -4 "	1 "
BN5-W60L3	590	1000	1900	φ 700	300	880	3 " -5 "	1 "
BN5-W60L4	590	1200	2150	φ 700	300	880	3 " -5 "	1 "
BN5-W75L3	610	1000	1950	φ 750	300	950	3 " -5 "	1-1/2 "
BN5-W75L4	610	1250	2200	φ 750	300	950	3 " -5 "	1-1/2 "
BN5-W80L3	620	1100	1970	φ 800	300	1000	4 " -6 "	1-1/2 "
BN5-W80L4	620	1250	2220	φ 800	300	1000	4 " -6 "	1-1/2 "
BN5-W90L3	650	1100	2140	φ 850	300	1000	4 " -6 "	1-1/2 "
BN5-W90L4	650	1250	2390	φ 850	300	1000	4 " -6 "	1-1/2 "
BN5-W100L3	670	1100	2070	φ 900	300	1140	4 " -6 "	1-1/2 "
BN5-W100L4	670	1350	2320	φ 900	300	1140	4 " -6 "	1-1/2 "
BN5-W120L3	750	1200	2170	φ 1000	350	1240	4 " -6 "	1-1/2 "
BN5-W120L4	750	1400	2420	φ 1000	350	1240	4 " -6 "	1-1/2 "
BN5-W140L3	830	1300	2350	φ 1100	350	1400	4 " -6 "	2 "
BN5-W140L4	830	1500	2600	φ 1100	350	1400	4 " -6 "	2 "
BN5-W160L3	860	1300	2400	φ 1200	350	1500	6 " -10 "	2 "
BN5-W160L4	860	1500	2650	φ 1200	350	1500	6 " -10 "	2 "

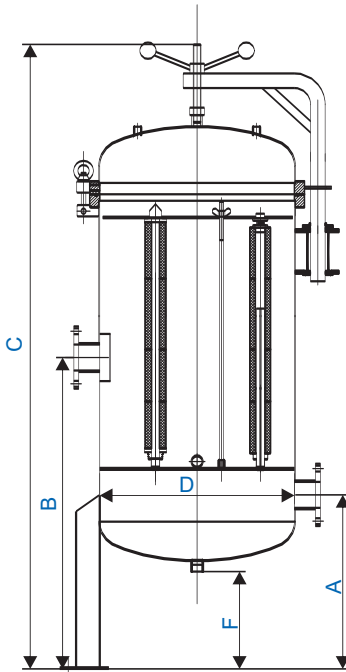

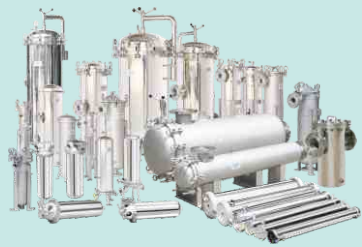

BONA WATER PURIFICATION

Add:No. 56 Beishan Branch Road, Xindeng Town, Fuyang District,
Hangzhou City, Zhejiang Province China.
Tel:86-0571-63259906 63258368 63218277 (For English)
Fax:86-0571-63254886
Post: 311404
E-mail: tongliwater@263.net



BN6- 精滤器

1. 材质 SUS304, SUS316L;
2. 最大工作压力 150 Psi;
3. 表面抛光处理或亚光处理。

BN6-Cartridge Filter Housing

Material: SUS304, SUS316L;
Max working pressure 150Psi;
Polished or sandblast external surface .

Model	A (mm)	B (mm)	C (mm)	D (mm)	F (mm)	In/Out	Drain
BN6-W5L3	75	180	1060	φ 200	320	1 " -2 "	1/4 "
BN6-W5L4	75	180	1310	φ 200	320	1 " -2 "	1/4 "
BN6-W7L3	80	180	1120	φ 250	390	1 1/2 " -2 "	1/2 "
BN6-W7L4	80	180	1370	φ 250	390	1 1/2 " -2 "	1/2 "
BN6-W11L3	150	600	1170	φ 300	440	2 " -3 "	1/2 "
BN6-W11L4	150	800	1420	φ 300	440	2 " -3 "	1/2 "
BN6-W15L3	150	600	1180	φ 350	490	2 " -3 "	3/4 "
BN6-W15L4	150	800	1430	φ 350	490	2 " -3 "	3/4 "
BN6-W20L3	150	600	1190	φ 400	560	2 " -4 "	3/4 "
BN6-W20L4	150	800	1440	φ 400	560	2 " -4 "	3/4 "
BN6-W27L3	150	600	1200	φ 450	610	2 " -4 "	3/4 "
BN6-W27L4	150	800	1450	φ 450	610	2 " -4 "	3/4 "
BN6-W30L3	150	600	1220	φ 500	660	2 " -4 "	1 "
BN6-W30L4	150	800	1470	φ 500	660	2 " -4 "	1 "
BN6-W36L3	150	600	1240	φ 550	730	2 1/2 " -4 "	1 "
BN6-W36L4	150	800	1490	φ 550	730	2 1/2 " -4 "	1 "
BN6-W40L3	150	600	1320	φ 600	760	2 1/2 " -4 "	1 "
BN6-W40L4	150	800	1570	φ 600	760	2 1/2 " -4 "	1 "
BN6-W50L3	150	700	1330	φ 650	830	3 " -4 "	1 "
BN6-W50L4	150	900	1580	φ 650	830	3 " -4 "	1 "
BN6-W60L3	150	700	1340	φ 700	880	3 " -5 "	1 "
BN6-W60L4	150	900	1590	φ 700	880	3 " -5 "	1 "
BN6-W75L3	200	700	1360	φ 750	950	3 " -5 "	1-1/2 "
BN6-W75L4	200	900	1610	φ 750	950	3 " -5 "	1-1/2 "
BN6-W80L3	200	700	1380	φ 800	1000	4 " -6 "	1-1/2 "
BN6-W80L4	200	900	1630	φ 800	1000	4 " -6 "	1-1/2 "
BN6-W90L3	200	700	1380	φ 850	1000	4 " -6 "	1-1/2 "
BN6-W90L4	200	900	1630	φ 850	1000	4 " -6 "	1-1/2 "
BN6-W100L3	200	700	1400	φ 900	1140	4 " -6 "	1-1/2 "
BN6-W100L4	200	900	1650	φ 900	1140	4 " -6 "	1-1/2 "
BN6-W120L3	250	800	1480	φ 1000	1240	4 " -6 "	1-1/2 "
BN6-W120L4	250	1000	1730	φ 1000	1240	4 " -6 "	1-1/2 "
BN6-W140L3	250	800	1510	φ 1100	1400	4 " -6 "	2 "
BN6-W140L4	250	1000	1760	φ 1100	1400	4 " -6 "	2 "
BN6-W160L3	250	800	1560	φ 1200	1500	6 " -10 "	2 "
BN6-W160L4	250	1000	1810	φ 1200	1500	6 " -10 "	2 "

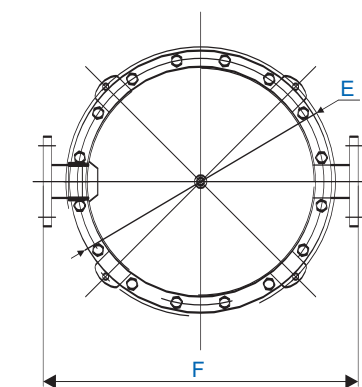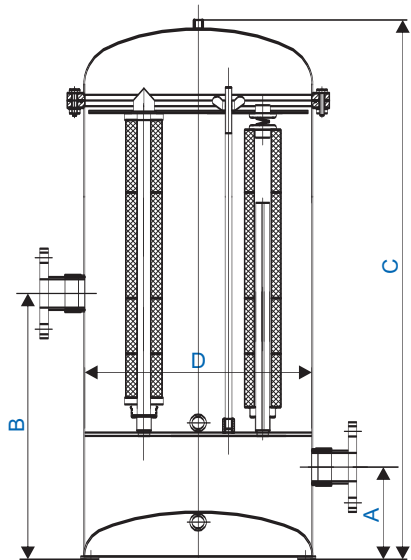

BN7-A 型



BN7-B 型



BN7- 单芯滤器

1. 材质 SUS304, SUS316L;
2. 最大工作压力 100 Psi;
3. 表面抛光处理或亚光处理。


BN7-Single Cartridge Filter Housing


Material: SUS304, SUS316L;
Max working pressure 100 Psi;
Polished or sandblast external surface .



Standard specifications

Model	A (mm)	B (mm)	C (mm)	In/Out
BN7-10 "	275	355	φ 89	1/2 " ,1 "
BN7-20 "	525	605	φ 89	3/4 " ,1 "
BN7-30 "	775	855	φ 89	1 "
BN7-40 "	1025	1105	φ 89	1 "

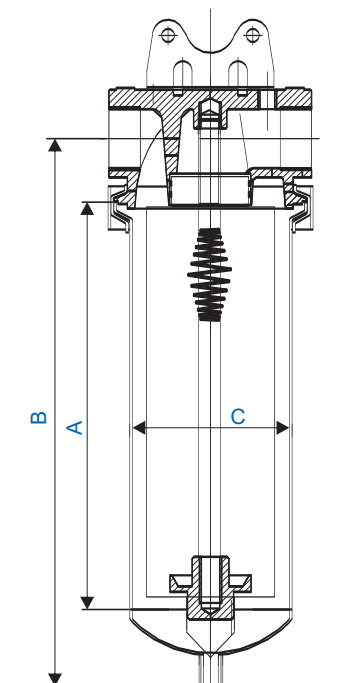

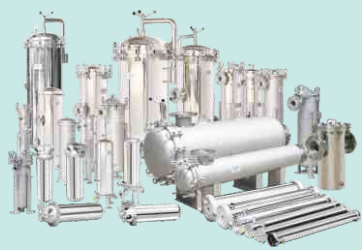

BONA WATER PURIFICATION

Add: No. 56 Beishan Branch Road, Xindeng Town, Fuyang District, Hangzhou City, Zhejiang Province China.
Tel: 86-0571-63259906 63258368 63218277 (For English)
Fax: 86-0571-63254886
Post: 311404
E-mail: tongliwater@263.net

BN7-C 型

BN7-D 型




BN7- 单芯滤器

1. 材质 SUS304, SUS316L;
2. 最大工作压力 100 Psi;
3. 表面抛光处理或亚光处理。

BN7-Single Cartridge Filter Housing

Material: SUS304, SUS316L;
Max working pressure 100 Psi;
Polished or sandblast external surface .

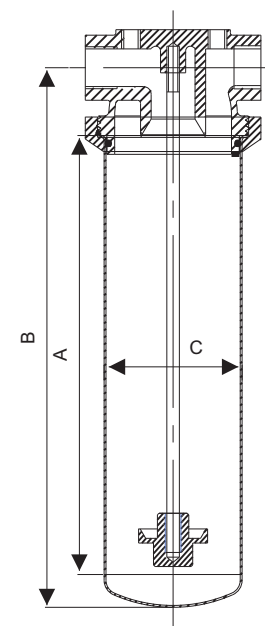

Standard specifications

Model	A (mm)	B (mm)	C (mm)	In/Out
BN7-10"	280	345	φ 88	3/4 " , 1 "
BN7-20"	534	599	φ 88	3/4 " , 1 "
BN7-30"	788	853	φ 88	1 "
BN7-40"	1042	1107	φ 88	1 "




BN7-E—单芯滤器

1. 材质 SUS304, SUS316L;
2. 最大工作压力 150 Psi;
3. 表面抛光处理或亚光处理。


BN7-E-Single Cartridge Filter Housing

Material: SUS304, SUS316L;
Max working pressure 150 Psi;
Polished or sandblast external surface.

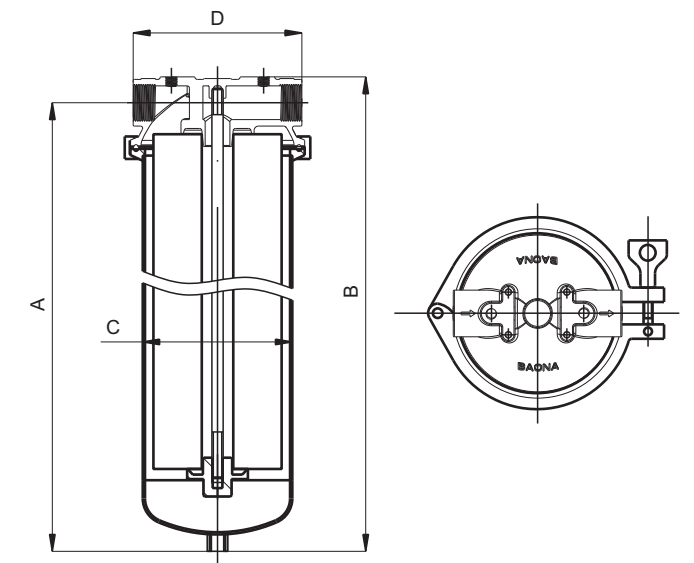

Standard specifications

Model	A (mm)	B (mm)	C (mm)	D (mm)	In/Out
BN7-10" -E	355	378	φ 133	150	1 "
BN7-20" -E	605	628	φ 133	150	1 "
BN7-30" -E	855	878	φ 133	150	1 "
BN7-40" -E	1105	1128	φ 133	150	1 "

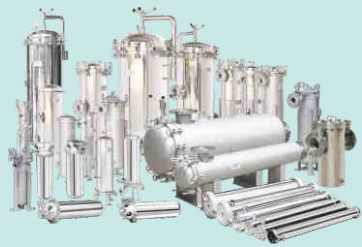

BONA WATER PURIFICATION

Add: No. 56 Beishan Branch Road, Xindeng Town, Fuyang District, Hangzhou City, Zhejiang Province China.
Tel: 86-0571-63259906 63258368 63218277 (For English)
Fax: 86-0571-63254886
Post: 311404
E-mail: tongliwater@263.net



BN8- 过滤器

1. 材质 SUS304, SUS316L;
2. 最大工作压力 150 Psi;
3. 表面抛光处理或亚光处理。


BN8-Filter Housing

Material: SUS304, SUS316L;
Max working pressure 150 Psi;
Polished or sandblast external face.



Standard specifications

Model	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	H (mm)	In/Out	Drain
BN8-W1L4	330	1370	1600	φ 200	315	185	364	3 "	1/2 "
BN8-W2L4	480	1510	2070	φ 450	590	250	655	4 "	3/4 "
BN8-W3L4	480	1510	2110	φ 500	645	230	706	5 "	1 "
BN8-W4L4	500	1530	2160	φ 550	705	230	756	5 "	1 "
BN8-W5L4	560	1590	2220	φ 600	745	265	806	5 "	1 "
BN8-W6L4	580	1600	2240	φ 650	810	260	896	6 "	1 "
BN8-W7L4	590	1610	2300	φ 700	862	230	946	8 "	1 "
BN8-W8L4	610	1630	2360	φ 750	930	240	996	8 "	1 1/2 "
BN8-W9L4	620	1640	2390	φ 800	980	235	1046	8 "	1 1/2 "
BN8-W10L4	650	1670	2420	φ 850	1045	250	1096	8 "	1 1/2 "

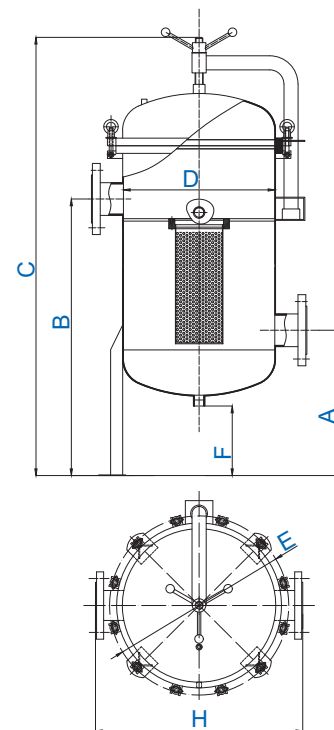

BN9- 过滤器


1. 材质 SUS304, SUS316L;
2. 最大工作压力 150 Psi;
3. 表面抛光处理或亚光处理。

BN9-Filter Housing


Material: SUS304, SUS316L;
Max working pressure 150 Psi;
Polished or sandblast external face.



Standard specifications

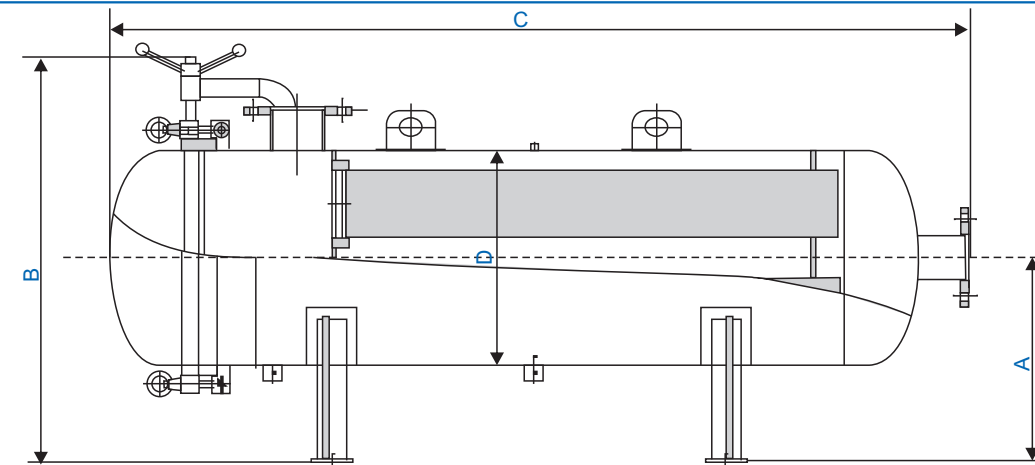

Model	A (mm)	B (mm)	C (mm)	D (mm)	In/Out	Drain
BN9-1×40"	350	530	1270	φ 200	2" -3 "	1/2 "
BN9-2×40"	500	960	1670	φ 450	3" -4 "	1 "
BN9-3×40"	580	1070	1810	φ 500	4" -6 "	1 "
BN9-4×40"	600	1110	1850	φ 550	4" -6 "	1 "
BN9-5×40"	630	1170	1800	φ 600	5" -6 "	1 "
BN9-6×40"	660	1230	1820	φ 650	5" -6 "	1 "
BN9-7×40"	690	1280	1840	φ 700	6" -8 "	1 "
BN9-8×40"	720	1360	1860	φ 750	6" -8 "	1 1/2 "
BN9-9×40"	750	1410	1880	φ 800	6" -8 "	1 1/2 "
BN9-10×40"	780	1470	1910	φ 850	6" -8 "	1 1/2 "

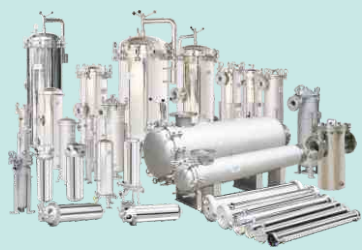

BONA WATER PURIFICATION

Add:No. 56 Beishan Branch Road, Xindeng Town, Fuyang District, Hangzhou City, Zhejiang Province China.
Tel:86-0571-63259906 63258368 63218277 (For English)
Fax:86-0571-63254886
Post: 311404
E-mail : tongliwater@263.net




BN10- 精滤器

- 1.材质SUS304,SUS316L;
- 2.最大工作压力150PSI;
- 3.表面抛光处理或亚光处理。

BN10-Cartridge Filter Housing

Material:SUS304,SUS316L;
Max working pressure150Psi;
Polished or sandblast external surface.

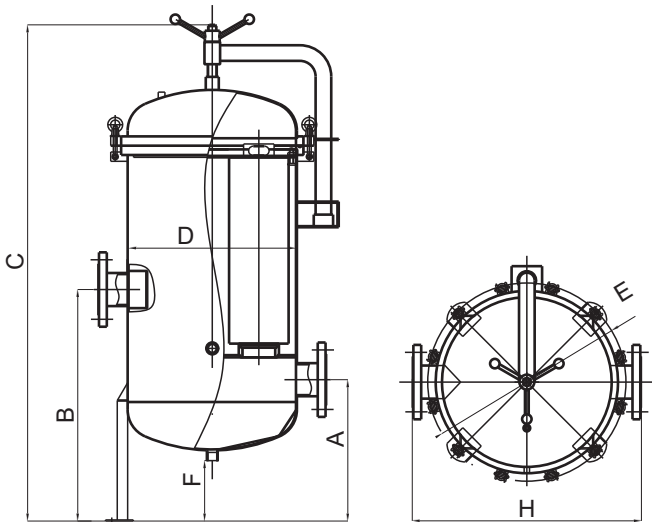

Standard specifications

Model	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	H (mm)	In/Out	Drain
BN10-W1L4	300	800	1550	φ 250	370	150	410	2-3 "	1/2 "
BN10-W2L4	370	900	1830	φ 350	460	200	550	3-4 "	3/4 "
BN10-W2L4	390	1000	1900	φ 400	530	190	600	4-5 "	3/4 "
BN10-W3L4	460	1100	1990	φ 450	590	250	650	4-5 "	3/4 "
BN10-W4L4	480	1100	2050	φ 500	645	230	740	5-6 "	1 "
BN10-W6L4	500	1100	2080	φ 550	705	240	790	5-6 "	1 "
BN10-W7L4	560	1200	2160	φ 600	745	290	840	5-6 "	1 "
BN10-W8L4	580	1200	2190	φ 650	810	300	890	5-6 "	1 "
BN10-W9L4	590	1200	2230	φ 700	862	280	940	6-8 "	1 "
BN10-W10L4	610	1250	2260	φ 750	930	290	990	6-8 "	1 1/2 "
BN10-W13L4	620	1250	2300	φ 800	980	270	1040	6-8 "	1 1/2 "
BN10-W18L4	670	1350	2380	φ 900	1115	290	1140	6-8 "	1 1/2 "




单芯卫生级过滤器

- 1.材质SUS304, SUS316L;
- 2.最大工作压力150Psi;
- 3.表面抛光处理。


1RS

Material: SUS304, SUS316L;
Max working pressure 150 Psi;
Polished finishing.

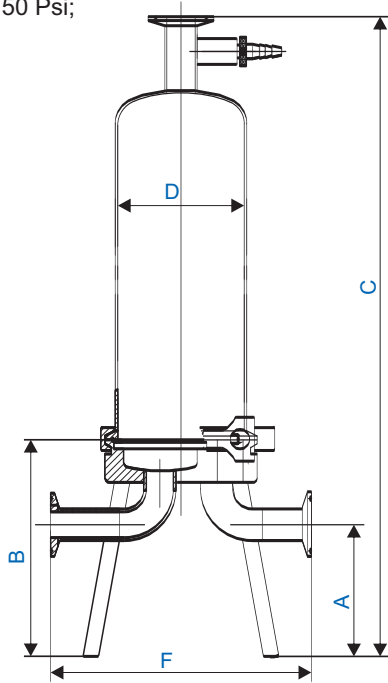

Standard specifications

Model	A (mm)	B (mm)	C (mm)	D (mm)	F (mm)	In/Out
1RS1	105	165	560	φ 102	185	1 "
1RS2	105	165	810	φ 102	185	1 "
1RS3	105	165	1060	φ 102	185	1 "

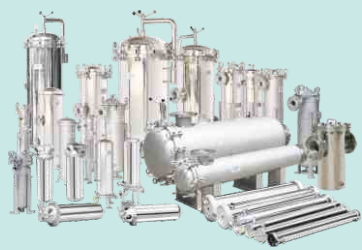

BONA WATER PURIFICATION

Add: No. 56 Beishan Branch Road, Xindeng Town, Fuyang District, Hangzhou City, Zhejiang Province China.
Tel: 86-0571-63259906 63258368 63218277 (For English)
Fax: 86-0571-63254886
Post: 311404
E-mail: tongliwater@263.net




多芯卫生级过滤器

1. 材质 SUS304, SUS316L;
2. 最大工作压力 150 Psi;
3. 表面抛光处理。

DL-RS

Material: SUS304, SUS316L;
Max working pressure 150 Psi;
Polished finishing.

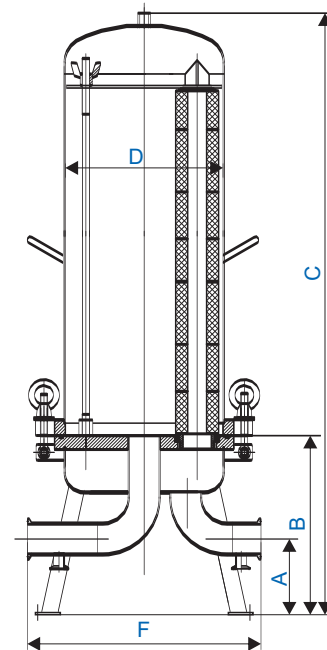

Standard specifications

Model	A (mm)	B (mm)	C (mm)	D (mm)	F (mm)	In/Out
3RS3	100	180	1160	φ 200	300	1
6RS3	100	250	1160	φ 250	400	1-1/2 "
8RS3	100	265	1175	φ 300	440	2 "
10RS3	100	265	1175	φ 300	440	2 "
12RS3	120	330	1240	φ 350	490	3 "
16RS3	120	350	1260	φ 400	540	3 "
20RS3	120	360	1270	φ 450	590	3 "




BFL 袋滤器

1. 材质 SUS304, SUS316L;
2. 最大工作压力 100 Psi;
3. 表面抛光处理或亚光处理。


BFL-Bag Filter Housing

Material: SUS304, SUS316L;
Max working pressure 100 Psi;
Polished or sandblast external surface.

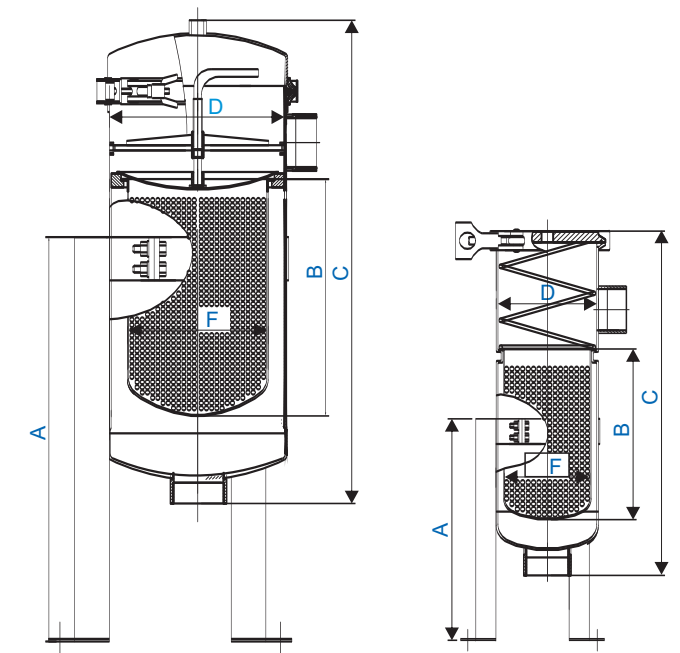

Standard specifications

Model	A (mm)	B (mm)	C (mm)	D (mm)	F (mm)	In/Out
BFL-1	500	380	700	φ 200	φ 170	1 " -3 "
BFL-2	700	720	1050	φ 200	φ 170	1 " -3 "
BFL-3	350	210	400	φ 114	φ 97	3/4 " -2 "
BFL-4	500	340	540	φ 114	φ 97	3/4 " -2 "

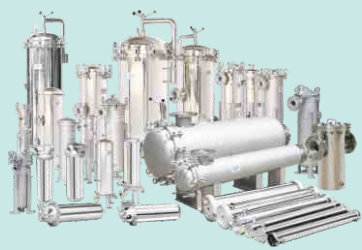

BONA WATER PURIFICATION


Add: No. 56 Beishan Branch Road, Xindeng Town, Fuyang District, Hangzhou City, Zhejiang Province China.
Tel: 86-0571-63259906 63258368 63218277 (For English)
Fax: 86-0571-63254886
Post: 311404
E-mail: tongliwater@263.net

BFH袋滤器

1. 材质 SUS304, SUS316L;
2. 最大工作压力 150 Psi;
3. 表面抛光处理或亚光处理。

BFH-Bag Filter Housing

Material: SUS304, SUS316L;
Max working pressure 150 Psi;
Polished or sandblast external surface .

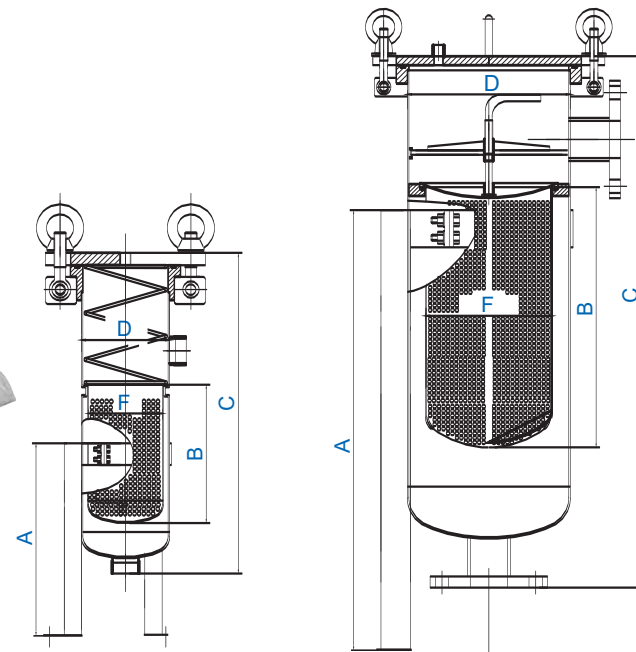

Standard specifications


Model	A (mm)	B (mm)	C (mm)	D (mm)	F (mm)	In/Out
BFH-1	500	380	720	φ 219	φ 170	1 " -3 "
BFH-2	700	720	1070	φ 219	φ 170	1 " -3 "
BFH-3	350	210	430	φ 114	φ 97	3/4 " -2 "
BFH-4	500	340	580	φ 114	φ 97	3/4 " -2 "

BFC 袋滤器

1. 材质 SUS304, SUS316L;
2. 最大工作压力 300 Psi;
3. 亚光处理。


BFC-Bag Filter Housing

Material: SUS304, SUS316L;
Max working pressure 300 Psi;
Sandblast external surface.

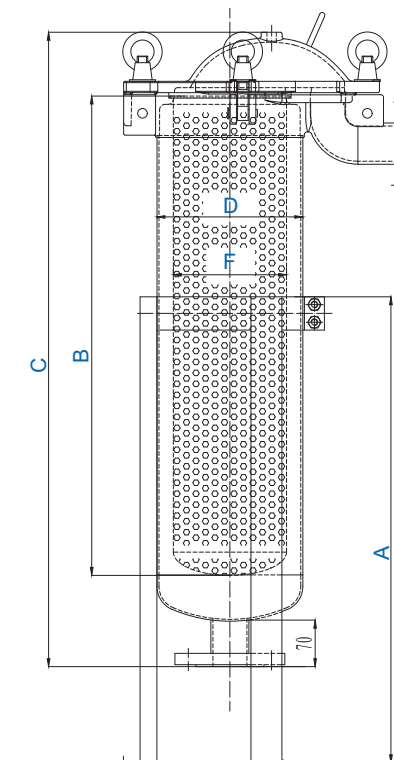

Standard specifications

Model	A (mm)	B (mm)	C (mm)	D (mm)	F (mm)	In/Out
BFC-1	500	380	620	φ 219	φ 170	2 "
BFC-2	700	720	960	φ 219	φ 170	2 "
BFC-3	350	210	365	φ 114	φ 97	1 "
BFC-4	500	340	485	φ 114	φ 97	1 "

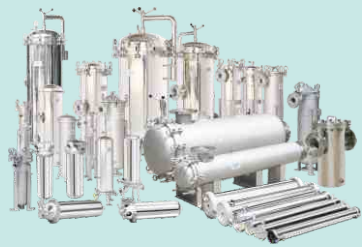

BONA WATER PURIFICATION

Add:No. 56 Beishan Branch Road, Xindeng Town, Fuyang District, Hangzhou City, Zhejiang Province China.
Tel:86-0571-63259906 63258368 63218277 (For English)
Fax:86-0571-63254886
Post: 311404
E-mail : tongliwater@263.net




BFM 袋滤器

- 1. 材质 SUS304, SUS316L;
- 2. 最大工作压力 150 Psi;
- 3. 表面抛光处理或亚光处理。

BFM-Bag Filter Housing

Material: SUS304, SUS316L;
Max working pressure 150 Psi;
Polished or sandblast external surface.

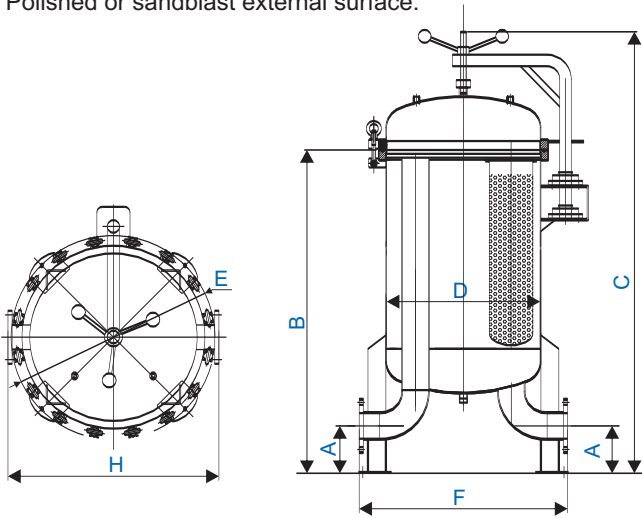

Standard specifications

Model	A (mm)	B (mm)	C (mm)	D (mm)	H (mm)	In/Out	Flowrate m³/h	NO.Bags
BFM-450-2F	150	1100	1430	φ 450	590	3 "	60	2
BFM-500-3F	150	1190	1540	φ 500	640	4 "	90	3
BFM-550-4F	150	1200	1560	φ 550	690	4 "	120	4
BFM-600-4F	150	1250	1630	φ 600	760	5 "	120	4
BFM-600-5F	150	1250	1630	φ 600	760	5 "	150	5
BFM-650-5F	180	1350	1740	φ 650	830	6 "	150	5
BFM-700-6F	200	1380	1780	φ 700	860	6 "	180	6
BFM-800-8F	200	1460	1920	φ 800	980	8 "	240	8
BFM-850-9F	200	1470	1950	φ 850	1030	8 "	270	9
BFM-900-10F	250	1550	2050	φ 900	1100	8 "	300	10
BFM-1000-12F	250	1570	2100	φ 1000	1200	8 "	360	12
BFM-1100-16F	250	1600	2150	φ 1100	1400	8 "	480	16
BFM-1200-18F	300	1780	2350	φ 1200	1500	10 "	540	18




篮式过滤器

- 1. 材质 SUS304,SUS316L;
- 2. 最大工作压力 150Psi;
- 3. 表面抛光处理或亚光处理。


Basket filter

Material: SUS304, SUS316L;
Max working pressure 150 Psi;
Polished or sandblast external surface .

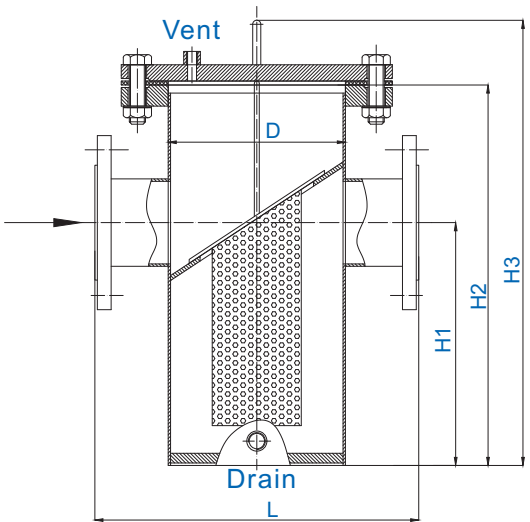

Standard specifications

Model	D (mm)	L (mm)	H1 (mm)	H2 (mm)	H3 (mm)	Vent	Drain	Flowrate m³/h
DN25	φ 114	280	160	260	340	¼"	½"	6
DN32	φ 114	280	165	270	350	¼"	½"	8
DN40	φ 114	280	180	300	380	¼"	½"	11
DN50	φ 114	280	180	300	380	¼"	½"	18
DN65	φ 133	330	220	350	430	¼"	½"	32
DN80	φ 159	340	260	400	480	½"	¾"	44
DN100	φ 219	420	310	470	550	½"	¾"	65
DN125	φ 273	500	430	620	700	½"	¾"	100
DN150	φ 273	500	430	620	700	½"	¾"	142
DN200	φ 325	560	530	780	860	½"	1"	270
DN250	φ 426	660	640	930	1010	½"	1"	420
DN300	φ 478	750	840	1200	1280	½"	1"	592

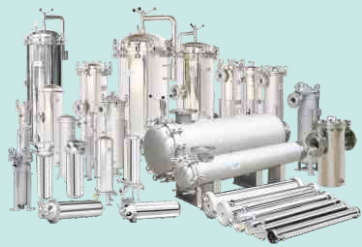

BONA WATER PURIFICATION

Add:No. 56 Beishan Branch Road, Xindeng Town, Fuyang District, Hangzhou City, Zhejiang Province China.
Tel:86-0571-63259906 63258368 63218277 (For English)
Fax:86-0571-63254886
Post: 311404
E-mail: tongliwater@263.net




机械过滤器

- 1. 材质 SUS304, SUS316L; Q235;
- 2. 最大设计工作压力 100 Psi;
- 3. 表面抛光处理或亚光处理。

Mechanical Filter
(Sand Filter & Active Carbon Filter)

Material: SUS304, SUS316L, Q235;
Max design working pressure 100 Psi;
Polished or sandblast external surface.

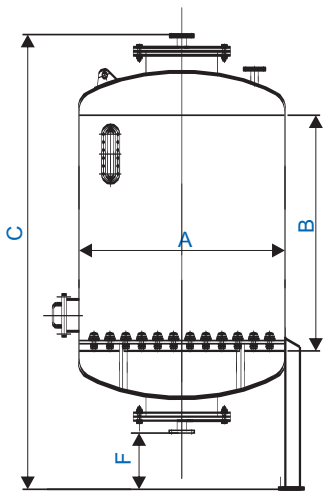

Standard specifications

Model	A (mm)	B (mm)	C (mm)	F (mm)	In/Out	Vent
300X1200	φ 300	1200	1800	300	1 "	3/4 "
400X1500	φ 400	1500	2150	300	1 "	3/4 "
500X1500	φ 500	1500	2230	300	1-1/4 "	1 "
600X1500	φ 600	1500	2290	300	1-1/4 "	1 "
700X1500	φ 700	1500	2340	300	1-1/2 "	1 "
800X1500	φ 800	1500	2390	300	1-1/2 "	1 "
900X1500	φ 900	1500	2600	300	1-1/2 "	1 "
1000X1500	φ 1000	1500	2750	400	1-1/2 "	1 "
1100X1500	φ 1100	1500	2800	400	2 "	1-1/4 "
1200X1500	φ 1200	1500	2850	400	2 "	1-1/4 "
1400X1500	φ 1400	1500	2950	400	2 "	1-1/4 "
1500X1800	φ 1500	1800	3360	400	2 "	1-1/4 "
1600X1800	φ 1600	1800	3500	400	2-1/2 "	1-1/2 "
1800X1800	φ 1800	1800	3610	400	2-1/2 "	1-1/2 "
2000X1800	φ 2000	1800	3710	400	3 "	1-1/2 "
2200X1800	φ 2200	1800	3810	400	3 "	1-1/2 "
2500X2000	φ 2500	2000	3860	400	3 "	1-1/2 "




离子交换器

- 1. 材质 SUS304, SUS316L; Q235;
- 2. 最大工作压力 100 Psi;
- 3. 表面抛光处理或亚光处理。


Ion Exchanger

Material: SUS304, SUS316L, Q235;
Max working pressure 100 Psi;
Polished or sandblast external surface.

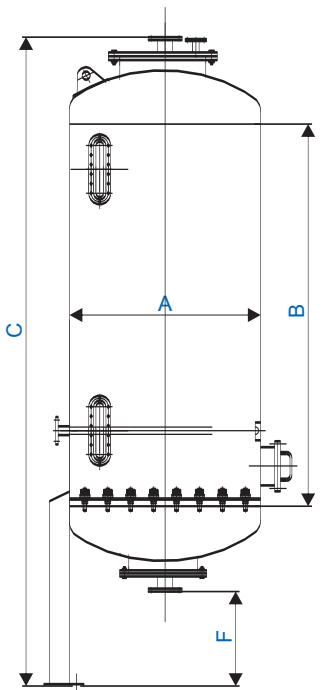

Standard specifications

Model	A (mm)	B (mm)	C (mm)	F (mm)	In/Out	Vent
300X2000	φ 300	2000	2640	300	1 "	3/4 "
400X2000	φ 400	2000	2690	300	1 "	3/4 "
500X2000	φ 500	2000	2760	300	1-1/4 "	1 "
600X2000	φ 600	2000	3100	300	1-1/4 "	1 "
700X2000	φ 700	2000	3150	300	1-1/2 "	1 "
800X2000	φ 800	2000	3210	300	1-1/2 "	1 "
900X2000	φ 900	2000	3310	300	1-1/2 "	1 "
1000X2000	φ 1000	2000	3410	400	1-1/2 "	1 "
1100X2000	φ 1100	2000	3460	400	2 "	1-1/4 "
1200X2000	φ 1200	2000	3510	400	2 "	1-1/4 "
1400X2000	φ 1400	2000	3610	400	2 "	1-1/4 "
1500X2000	φ 1500	2000	3660	400	2 "	1-1/4 "

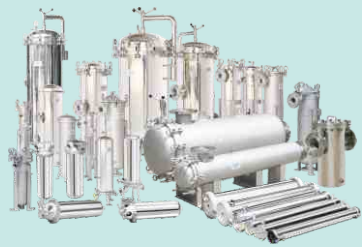

BONA WATER PURIFICATION

Add:No. 56 Beishan Branch Road, Xindeng Town, Fuyang District, Hangzhou City, Zhejiang Province China.
Tel:86-0571-63259906 63258368 63218277 (For English)
Fax:86-0571-63254886
Post: 311404
E-mail: tongliwater@263.net




软化罐

- 1. 材质 SUS304, SUS316L;
- 2. 最大工作压力 100 Psi;
- 3. 表面抛光处理或亚光处理。

Softening Vessel

Material: SUS304, SUS316L;
Max working pressure 100 Psi;
Polished or sandblast external surface .

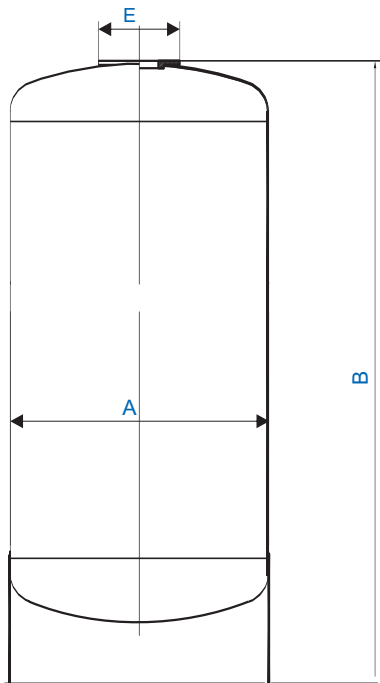

Standard specifications

Model	A	B	E
1052	φ 250	1320	2-1/2 "
1252	φ 300	1320	2-1/2 "
1465	φ 350	1650	2-1/2 "
1665	φ 400	1650	2-1/2 "
2065	φ 500	1650	4 "




软化罐带腿

- 1. 材质 SUS304, SUS316L;
- 2. 最大工作压力 100 Psi;
- 3. 表面抛光处理或亚光处理。


Softening Vessel with legs

Material: SUS304, SUS316L;
Max working pressure 100 Psi;
Polished or sandblast external surface .

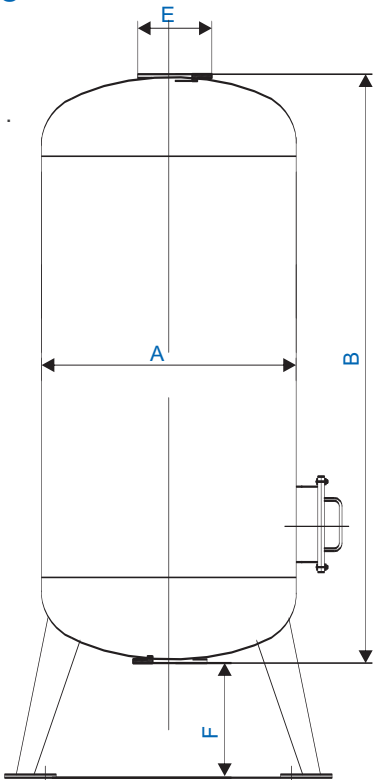


Standard specifications

Model	A	B	F	E
2265	φ 550	1650	250	4 "
2472	φ 600	1850	300	4 "
3072	φ 750	1850	300	4 "
3272	φ 800	1850	300	4 "
3672	φ 900	1850	300	4 "
4272	φ 1000	1850	300	4 "
4872	φ 1200	1850	350	4 "

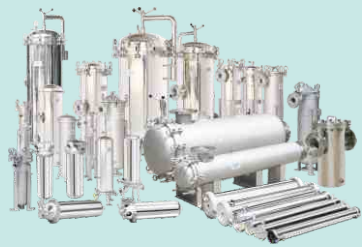

BONA WATER PURIFICATION

Add:No. 56 Beishan Branch Road, Xindeng Town, Fuyang District,
Hangzhou City, Zhejiang Province China.
Tel:86-0571-63259906 63258368 63218277 (For English)
Fax:86-0571-63254886
Post: 311404
E-mail: tongliwater@263.net

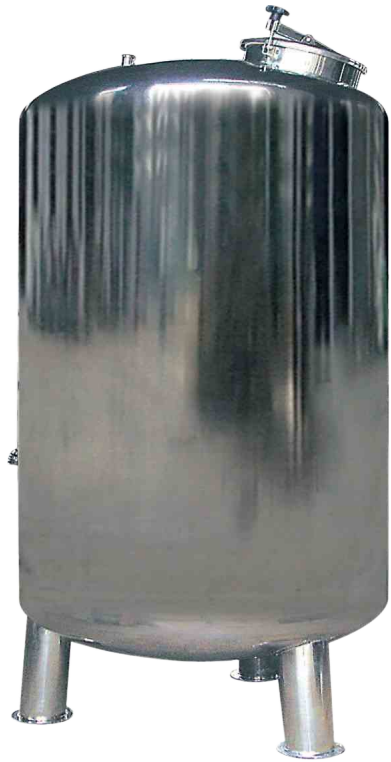


水箱

- 1. 材质 SUS304, SUS316L;
- 2. 最大工作压力 100 Psi;
- 3. 亚光处理。

Water Tank (Round Cap)


Material: SUS304, SUS316L;
Max working pressure 100 Psi;
Sandblast external surface.

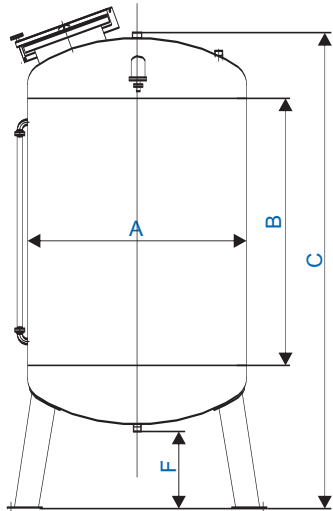

Standard specifications


Model	A (mm)	B (mm)	C (mm)	F (mm)	In/Out	Vent
0.3M ³	φ 550	1220	1830	250	3/4 "	3/4 "
0.5M ³	φ 700	1220	1910	250	3/4 "	3/4 "
1M ³	φ 1000	1220	2110	300	1 "	3/4 "
2M ³	φ 1300	1500	2540	300	1 "	3/4 "
3M ³	φ 1600	1500	2690	300	1-1/2 "	3/4 "
4M ³	φ 1600	2000	3190	300	1-1/2 "	3/4 "
5M ³	φ 1800	2000	3290	300	1-1/2 "	3/4 "
6M ³	φ 1900	2000	3390	350	1-1/2 "	3/4 "
8M ³	φ 2000	2500	3940	350	2 "	3/4 "
10M ³	φ 2200	2400	3940	350	2 "	3/4 "

Heat exchanger 热交换器

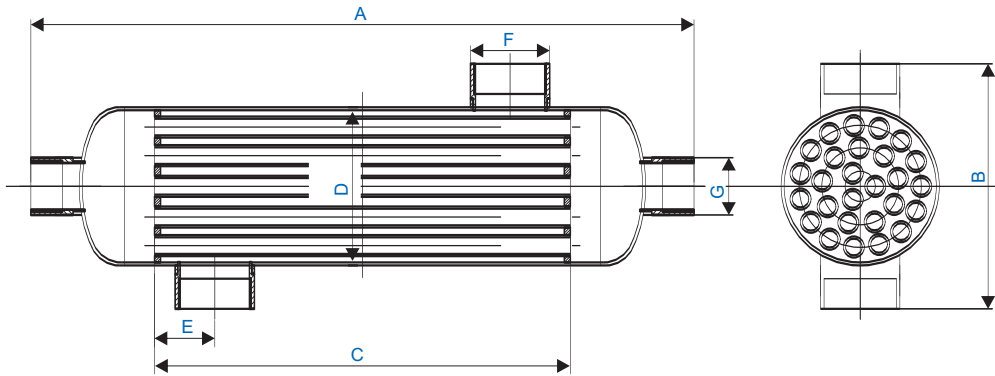

Standard specifications

Model	A	B	C	D	E	F	Drain
BN-HE-45	302	149	151	φ 89	38	1 "	3/4 "
BN-HE-70	403	149	249	φ 89	38	1 "	3/4 "
BN-HE-130	490	149	300	φ 89	38	1-1/2 "	3/4 "
BN-HE-180	442	165	276	φ 105	40	1-1/2 "	1 "
BN-HE-250	571	165	405	φ 105	40	1-1/2 "	1 "
BN-HE-300	700	165	534	φ 105	40	1-1/2 "	1 "
BN-HE-500	1166	165	1000	φ 105	57	2 "	1 "
BN-HE-1000	968	204	764	φ 133	57	2 "	2 "



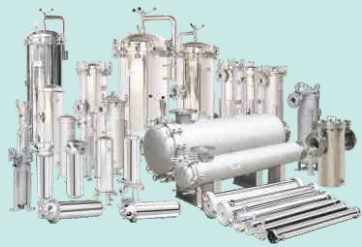


BONA WATER PURIFICATION

Add:No. 56 Beishan Branch Road, Xindeng Town, Fuyang District, Hangzhou City, Zhejiang Province China.
Tel:86-0571-63259906 63258368 63218277 (For English)
Fax:86-0571-63254886
Post: 311404
E-mail: tongliwater@263.net



Coupling 卡套

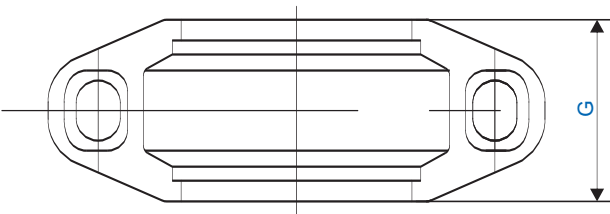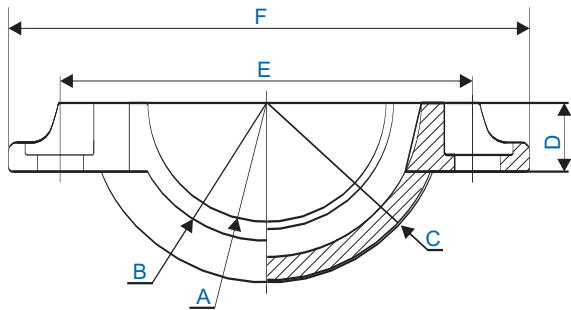


Standard specifications

Size	D1	D2	A	B	C
3/4 "	φ 26.7	φ 20.96	15.88	7.95	1.42
1 "	φ 33.4	φ 26.64	15.88	7.95	1.60
1-1/4 "	φ 42.2	φ 35.08	15.88	7.95	1.60
1-1/2 "	φ 48.3	φ 40.94	15.88	7.95	1.60
2 "	φ 60.3	φ 52.48	15.88	7.95	1.60
2-1/2 "	φ 73.0	φ 63.44	15.88	7.95	1.98
3 "	φ 88.9	φ 79.34	15.88	7.95	1.98
4 "	φ 114.3	φ 103.98	15.88	9.53	2.11
5 "	φ 141.3	φ 130.98	15.88	9.53	2.13
6 "	φ 168.3	φ 157.18	15.88	9.53	2.16
8 "	φ 219.1	φ 207.00	19.05	11.13	2.34

Standard specifications

Size	A	B	C	D	E	F	G
3/4 "	φ 24.3	φ 33.7	φ 51.7	16	64.7	89.3	44
1 "	φ 30.7	φ 40.1	φ 58.1	16	71.1	96.1	45
1-1/4 "	φ 39.5	φ 48.9	φ 66.9	16	79.9	104.9	45
1-1/2 "	φ 45.5	φ 54.9	φ 72.9	16	85.9	110.9	45
2 "	φ 57.6	φ 67.0	φ 85.0	16	98.0	123.0	46
2-1/2 "	φ 70.0	φ 78.0	φ 98.0	20	112.0	137.0	48
3 "	φ 85.4	φ 95.0	φ 115.4	20	134.0	163.0	48
4 "	φ 110.4	φ 120.0	φ 143.4	24	160.0	189.0	48
5 "	φ 137.4	φ 148.4	φ 170.44	26	186.0	219.0	48
6 "	φ 164.4	φ 174.4	φ 197.4	28	219.0	254.0	48

Tri-clover 精装卡箍

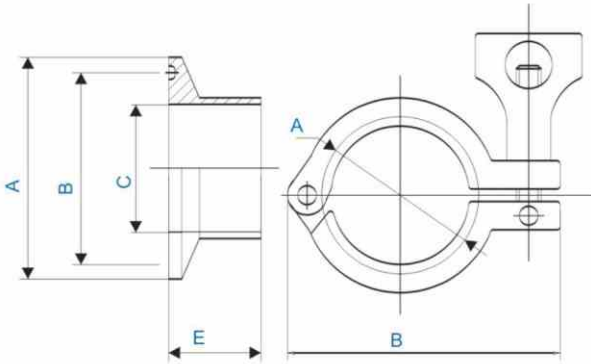

Standard specifications

Size	φ	A	B	C	E
3/4 "	19.05	50.5	43.5	16.5	21.0
1 "	25.4	50.5	43.5	22.4	21.0
1-1/4 "	31.8	50.5	43.5	28.8	21.0
1-1/2 "	38.1	50.5	43.5	35.1	21.0
2 "	50.8	64.0	56.5	47.8	21.0
2-1/2 "	63.5	77.5	70.5	59.5	21.0
3 "	76.2	91.0	83.5	72.3	21.0
3-1/2 "	88.9	106.0	97.0	85.1	21.0
4 "	101.6	119.0	110.0	97.6	21.0

Standard specifications

Size	φ	A	B
1 " - 1 1/2 "	19-38	53.5	44.5
2 "	50.8	66.5	57.5
2-1/2 "	63.5	81.0	72.0
3 "	76.2	94.0	85.0
3-1/2 "	89.1	108.0	102.0
4 "	101.6	122.0	113.0

Accessories 配件

